

Objective

Mechanical Engineering

[Railway & Other Engineering (Diploma) Competitive Exams.]

P. K. Mishra



[For competitive selection examinations of Railway Service, Engineering (diploma) level, State Public Service Commissions, C.P.W.D., P.W.D., Coal India, Irrigation Departments and other equivalent services.]

By

Pramod Kumar Mishra & Kumar Sundram

Revised & Enlarged Edition

UPKAR PRAKASHAN, AGRA-2

Introducing Direct Shopping

Now you can purchase from our vast range of books and magazines at your convenience:

- Pay by Credit Card/Debit Card or Net Banking facility on our website www.upkar.in OR
- Send Money Order/Demand Draft of the print price of the book favouring 'Upkar Prakashan' payable at Agra. In case you do not know the price of the book, please send Money Order/Demand Draft of ₹ 100/- and we will send the books by VPP (Cash on delivery).

(Postage charges FREE for purchases above ₹ 100/-. For orders below ₹ 100/-, ₹ 20/- will be charged extra as postage)

@ Publishers

Publishers

UPKAR PRAKASHAN

(An ISO 9001: 2000 Company)

2/11A, Swadeshi Bima Nagar, AGRA-282 002

Phone: 4053333, 2530966, 2531101 Fax: (0562) 4053330, 4031570

E-mail: care@upkar.in, Website: www.upkar.in

Branch Offices:

4845, Ansari Road, Daryaganj,

New Delhi—110 002 Phone: 011–23251844/66

1-8-1/B, R.R. Complex (Near Sundaraiah Park, Adjacent to Manasa Enclave Gate), Bagh Lingampally

Bagh Lingampally,

Hyderabad — 500 044 (A.P.) Phone: 040–66753330 Pirmohani Chowk, Kadamkuan, Patna — 800 003 Phone: 0612–2673340 28, Chowdhury Lane, Shyam Bazar, Near Metro Station, Kolkata-700004 (W.B.) Phone: 033-25551510

- The publishers have taken all possible precautions in publishing this book, yet if any mistake has crept in, the publishers shall not be responsible for the same.
- This book or any part thereof may not be reproduced in any form by Photographic, Mechanical, or any other method, for any use, without written permission from the Publishers.
- Only the courts at Agra shall have the jurisdiction for any legal dispute.

ISBN: 978-81-7482-458-5

Price: ₹ 125.00

(Rs. One Hundred Twenty Five Only)

Code No. 953

Printed at: UPKAR PRAKASHAN (Printing Unit) Bye-pass, AGRA

PREFACE

Success in examinations depends on proper planning of studies and appropriate selection of study materials. The pattern of examinations has become tough. This is the reason why a right choice of study materials plays a very important role. This book cover thoroughly all the basics of the whole course as well as present to the examinee a wide spectrum of the multiple choice questions having a huge variety. The author has made a sincere attempt in this direction in the present book. Various unique features of the book are as under:

- A brief review of concepts at a glance covering all fundamentals and important conclusions is given at the start of every chapter.
- Chapters are classified under different units.
- Multiple choice questions in every chapter are arranged in a systematic and sequential way covering the whole text and spectrum of the chapter.
- Answers are provided at the end of every chapter.
- Model Test Papers covering the whole syllabus are also provided at the end of the book again with their answers. These papers will prove to be fit for examination and will provide a chance to students in assessing their level of preparation.

The present book is self-sufficient in all respects.

I am thankful to my wife Mrs. Rita Mishra who has put hard labour in reading the proofs thoroughly and pointing out errors and omissions. My sincere thanks are also due to publisher Mr. Mahendra Jain who gave me a chance to write this type of books. This edition is a nice form.

Although all attempts have been made to avoid errors and printing mistakes, yet omissions are a human weakness and, therefore, constructive suggestions, modifications and errors brought to my notice will be highly appreciated and incorporated in the next edition.

—Pramod Kumar Mishra

R

Kumar Sundram

CONTENTS

	Pa	ges
1.	Thermodynamics	15
2.	Nuclear Power Plant	24
3.	Applied Mechanics	37
4.	Strength of Material	48
5.	Fluid Mechanics49-	58
6.	Internal Combustion Engine	68
7.	Steam Boilers, Compressors, Engines, Nozzles, Turbines, Gas Turbines	
	and Jet Engines69–	-79
8.	Heat Transfer, Refrigeration and Air Conditioning 80-	90
9.	Theory of Machines and Machine Design	00
10.	Engineering Materials	09
11.	Production Engineering, Industrial Engineering and Management 110-1	19
12.	Workshop Technology	35
13.	Automobile Engineering	46
	Model Set 1	54
	Model Set 2	61
	Model Set 3	69
	Model Set 4	76
	Model Set 5	84

Mechanical Engineering




Thermodynamics

The study of heat and its transformation to mechanical energy is called THERMODYNA-MICS. It is the science that deals with the relations between heat, work and properties of systems. It is based on the law of conservation of energy and the fact that heat flows naturally from a hot body to a cold body and not the other way around.

Zeroth Law of Thermodynamics

This law states that "Two bodies or systems that are in thermal equilibrium with a third body are in thermal equilibrium with each other". Two bodies A and B are in thermal equilibrium if they are at the same temperature. One way to determine if two bodies A and B are in thermal equilibrium would be to make use of a third body C in thermal equilibrium by a thermometer. If the thermometer reads the same temperature for bodies A and B, then bodies A and B are in thermal equilibrium with each other.

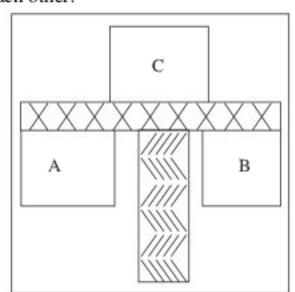

First Law of Thermodynamics

When the law of energy is applied to thermal system then we call it the first law of thermodynamics. This law states that, "Whenever heat is added to a system, it transforms to an equal amount of some other form/forms of energy". Clausius stated the first law or thermodynamics in the form as—

dH = dU + dW

Where dH = quantity of heat supplied or taken away from the system

> dU = change in internal energy of the system

dW = External work done

The other form of first law is

$$dQ \propto dW$$

$$dQ = \frac{dW}{J}$$

$$\int dQ = \int \frac{dW}{J}$$

Second Law of Thermodynamics

Kelvin's Law—It is impossible by means of inanimate material agency to derive mechanical effect from any portion of the matter by cooling it below the temperature of the coldest of the surrounding objects.

Planck's Law—It is impossible to construct an engine which working in a complete cycle, will produce no effect other than the raising of a weight and the cooling of a heat reservoir.

Kelvin-Planck Law—It is impossible to construct an engine that operating in a cycle, will produce no effect other than the extraction of heat from a reservoir and the performance of an equivalent amount of work.

Clausius' Law—It is impossible for a selfacting machine, unaided by an external agency to convey heat from one body to another at a higher temperature or heat can't of itself pass from a colder to a warmer body.

Third Law of Thermodynamics

Third Law of thermodynamics states as follows:


4 | Mech. Engg.


"The entropy of perfect crystal at absolute zero temperature is zero". However, if the substance is not a perfect crystal like glass or solid solution, this entropy will have a finite value.

Power Cycle

(i) Carnot Cycle—In a Carnot cycle, the working substance is subjected to a cyclic operation consisting of two isothermal and two reversible adiabatic or isentropic operations.

Efficiency
$$(\eta)_{camot} = \frac{T_3 - T_1}{T_3}$$

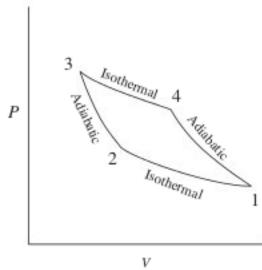

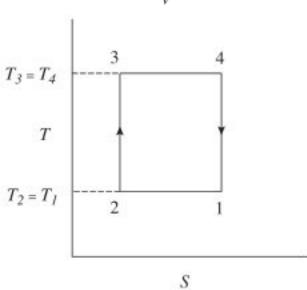



Carnot Cycle

(ii) Otto Cycle—The ideal otto cycle consists of two constant volume and two reversible adiabatic or isentropic processes. It is also known as constant volume cycle. This cycle is taken as a standard of comparison for internal combustion engines. These days, many gas, petrol and many of the oil engines run on this cycle.

Efficiency
$$(\eta)_{\text{otto}} = 1 - \frac{T_4 - T_1}{T_3 - T_2}$$

 $(\eta)_{\text{otto}} = 1 - \frac{1}{r^{(\gamma - 1)}}$

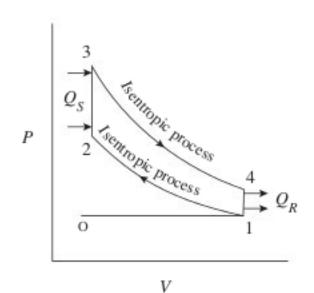

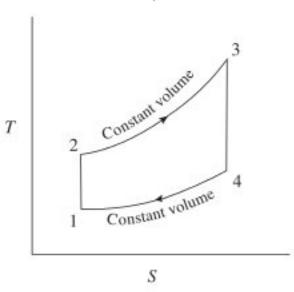



Otto Cycle

Hence the efficiency of otto cycle depends on compression ratio (r) only. In actual practice 'r' cannot be increased beyond a value of 7 or so.

(iii) Diesel Cycle—The ideal diesel cycle consists of two reversible adiabatic or isentropic, a constant pressure and a constant volume processes. This is an important cycle on which all the diesel engines work. It is also known as constant pressure cycle as heat is received at a constant pressure.

Efficiency
$$(\eta)_{Diesel} = 1 - \frac{1}{\gamma} \left(\frac{T_4 - T_1}{T_3 - T_2} \right)$$

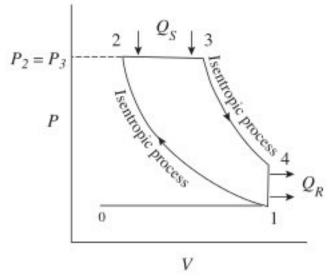

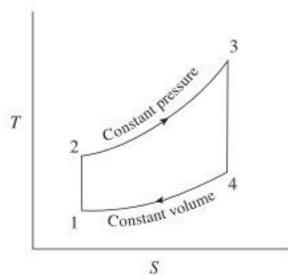

Diesel Cycle

(iv) Joule's Cycle—It consists of two constant pressure and two reversible adiabatic or isentropic processes. The efficiency of the Joule's cycle is lower than Carnot efficiency. The reversed Joule cycle is known as Bell Coleman cycle or Brayton cycle and is applied to refrigerators, where air is used as a refrigerant.

The air is used as a refrigerant.

Efficiency
$$(\eta)_{Joule} = 1 - \frac{T_4 - T_1}{T_3 - T_2}$$


Or $(\eta)_{Joule} = 1 - \frac{1}{(r)^{\gamma - 1}}$


Promote the standard pressure of the

(b) **Brayton Cycle**

(v) Stirling Cycle—It consists of two isothermal and two constant volume processes. The efficiency of Stirling cycle is same as that of Carnot cycle. This is due to the fact that the cycle is reversible, and all reversible cyclic have the same efficiency.

Efficiency
$$(\eta)_{\text{Stirling}} = \frac{T_3 - T_1}{T_3}$$

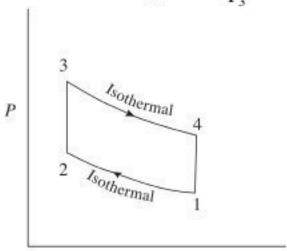

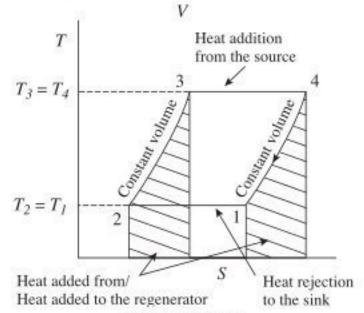

Stirling Cycle

(vi) Ericsson Cycle-It consists of two isothermal and two constant pressure processes. It is made thermodynamically reversible by the action of a regenerator. This cycle is used these days in the manufacture of closed-cycle type gas turbines. The efficiency of the Carnot cycle is same as that of Carnot efficiency i.e.,

Thermometry

An instrument used for the measurement and comparison of temperature is called a thermometer. The branch of heat which deals with the study of thermometers, i.e. art of measuring temperature is called thermometry.

Kinds of Thermometers

- (1) (a) Liquid thermometers

 Celcius
 Fahrenheit
 Reumer
 - (b) Alcohol
- (2) Gas thermometers Constant Volume
- Electrical resistance thermometers (Platinum resistance thermometers)
- (4) Thermo couple thermometers (Based on seebeck effect)
- (5) Total radiation thermometers (Pyrometers) (measure high temperature)
- (6) Absolute scale thermometer (Kelvin scale)

Thermometer Scale

In any thermometer there is an upper fixed point (U.F.P.) and a lower fixed point (L. F. P.). The difference of U.F.P. and L.F.P. is known as fundamental interval (F.I.).

$$F.I. = U.F.P. - L.F.P.$$

For any thermometer

$$\frac{\text{Reading} - \text{L.F.P.}}{\text{endomorphism}} = \text{a const}$$

$$\frac{\text{Reading} - \text{L.F.P.}}{\text{U.F.P.} - \text{L.F.P.}} = \text{a constant}$$

$$\frac{C-0}{100-0} = \frac{F-32}{212-32}$$
$$= \frac{R-0}{80-0} = \frac{K-273}{373-273} = \frac{R_n-492}{672-492}$$

Here, C = Celcius Scale (Centigrade)

F = Fahrenheit Scale

R = Reumer Scale

K = Kelvin Scale

 $R_n = Rankin Scale$

Basic Principle of Thermometers

Specific Heat—The heat required by a unit mass of a substance to raise its temperature by one degree is called the specific heat of the substance. It is also called the heat capacity of the substance. In S.I. system, the unit of specific heat is J/kg°K and in M.K.S. units it is kcal/kg°C.

Specific Volume — It is defined as the volume per unit mass and may be expressed in m^3/kg . It is reciprocal of density

$$v = \frac{1}{\rho}$$
, where v is the specific volume.

Any property of substance which depends upon temperature is used in making thermometers.

$$T \propto x$$

(where x =any property of substance)

$$T_1 = Kx_1$$

$$T_2 = Kx_2$$

$$\Rightarrow \frac{\mathbf{T}_2}{\mathbf{T}_1} = \frac{x_2}{x_1}$$

or,
$$T_2 = T_1 \frac{x_2}{x_1}$$

Here T_1 is taken as standard temperature. In thermometry triple point of water (273.16 Kelvin) is taken as standard temperature of thermometry.

$$T = 273.16 \frac{x_2}{x_1}$$

(a) For constant volume gas thermometers

$$T = 273 \cdot 16 \frac{P}{P_{273 \cdot 16}} \quad P \rightarrow Pressure$$

(b) For constant pressure gas thermometers

$$T = 273 \cdot 16 \frac{V}{V_{273 \cdot 16}} \quad V \rightarrow Volume$$

(c) For electric resistance thermometer

$$T = 273.16 \frac{R}{R_{273.16}}$$
 R \rightarrow Resistance

(d) For thermocouple thermometer

$$T = 273 \cdot 16 \frac{E}{E_{273 \cdot 16}}$$
 E \rightarrow e.m.f.

Temperature Measurement—Let there be any property of a substance whose value at 0°C is x_0 and t° C is x_t then

$$(x_t - x_0) \propto x_0$$
 (initial value)

$$\propto t$$
 (change in temperature)

$$(x_t - x_0) = \alpha x_0 t$$

$$\Rightarrow \qquad \alpha = \frac{x_t - x_0}{x_0 t} \qquad \dots (i)$$

and
$$x_{100} = x_0 + x_0 \alpha \times 100$$

$$\therefore \qquad \alpha = \frac{x_{100} - x_0}{x_0 - 100} \qquad ...(ii)$$

From (i) and (ii)

$$t = \frac{x_t - x_0}{x_{100} - x_0} \times 100$$

(a) For constant volume gas thermometer

$$t = \frac{P_t - P_0}{P_{100} - P_0} \times 100 \qquad P \rightarrow Pressure$$

(b) For constant pressure gas thermometer

$$t = \frac{V_t - V_0}{V_{100} - V_0} \times 100 \quad V \rightarrow \text{Volume}$$

(c) For electric resistance thermometer

$$t = \frac{R_t - R_0}{R_{100} - R_0} \times 100$$
 R \rightarrow Resistance

(d) For thermocouple thermometer

$$t = \frac{E_t - E_0}{E_{100} - E_0} \times 100$$

E → Electromotive force

Scale	LFP.	U.F.P.	F.I.
Celcius	0°C	100°C	100
Fahrenheit	32°F	212°F	180
Reumer	0°R	80°R	80
Kelvin	273K	373K	100
Rankin	492°R _n	672°R _n	180

Gas Laws

 (i) Boyle's Law—At constant temperature the volume of a given mass of a gas varies inversely as its absolute pressure.

$$V \propto \frac{1}{P}$$

$$PV = Constant$$

(ii) Charle's Law—At constant pressure, the volume of a given mass of a gas varies directly with temperature.

$$V \propto T$$

$$\frac{V}{T} = Constant$$

(iii) Joule's Law—This law states that the internal energy of a given quantity of a gas depends only on the temperature.

$$dE = m \times C_v \times dT$$

- (iv) **Regnault's Law**—This law states that the two specific heats C_{ν} and C_{p} of a gas do not change with the change of temperature and pressure.
- (v) Avogadro's Law—According to this law equal volumes of different perfect gases at the same temperature and pressure contain equal number of molecules.

Fuels

Fuels may be chemical or nuclear. Here we consider chemical fuels.

"A chemical fuel is a substance which releases heat energy on combustion".

Fuels may be classified as-

- They occur in nature called primary fuels or are prepared called secondary fuels.
- They are in solid, liquid and gaseous states.

Requirements of a Good Quality Fuel

- (A) It should have a low ignition point.
- (B) It should have high calorific value.
- (C) It should not produce harmful gases.
- (D) It should produce least quantity of smoke and gases.
- (E) Once it is ignited, it should freely burn with high efficiency.
- (F) It should be easy to store.
- (G) It should be economical
- (H) It should be convenient for transportation.

Calorific Value of Fuels

The heat value of a solid or liquid fuel can be defined as the amount of heat given out by the complete cumbustion of 1 kg of fuel. It is expressed by the term kJ/kg. The calorific value of gaseous fuel is expressed in terms of kJ/m³ at a specified temperature and pressure.

There are two types of calorific value of fuels:

- 1. Higher or Gross Calorific Value.
- 2. Lower or Net Calorific Value.
- Higher Calorific Value—The amount of heat obtained by the complete combustion of 1 kg of a fuel, when the products of its combustion are cooled down to the temperature of supplied air

(usually taken as 15°C), is called the higher calorific value of fuel. The higher calorific value of the fuel can be determined by the Dulong's formula i.e. H.C.V. 33,800 C + 144000 Hz + 92705 kJ/kg.

Lower Calorific Value—The lower calorific value or net calorific value is the heat released when water vapour in the products of combustion is not condensed and remains in the vapour form.

L.C.V. = H.C.V. -
$$m_s \times 2466 \text{ kJ/kg}$$

= H.C.V. - 9Hz × 2466 kJ/kg

 $[: m_s = 9Hz]$

Products of Petroleum Refining Process

G - *******						
S. N.	Fraction	App. Boiling Range, °C	Remarks			
1.	Fuel gas	-160 to - 44	Methane, ethane and some pro- pane used as refinery fuel.			
2.	Kerosene Middle distillate	200 to 300	Domestic, aviation fuels.			
3.	Light Gas Oil Middle distillate	200 to 315	Diesel fuels, furnace fuel oil.			
4.	Propane	-40	LPG			
5.	Butane	- 12 to 30	Blended with motor gasoline to increase its vol- atility.			
6.	Vacuum gas oil	425 to 600	Feed for cat- alytic cracking			
7.	Heavy gas oil	315 to 425	Feed for cat- alytic cracking			
8.	Pitch	> 600	Asphalts, heavy fuel oil.			
9.	Light Naphtha	0 to 150	Motor gasoline for catalytic re- forming.			
10.	Heavy Naphtha	150 to 200	Catalytic reforming fuel, blended with light gas oil to form jet fuels.			

Types of fuel	Natural (Primary)	Prepared (Secondary)
Solid	Wood, peat, lignite coal	Coke, charcoal, bri- quettes
Liquid	Petroleum	Gasoline, kerosene, fuel oil, alcohol, benzol, shale oil.
Gaseous	Natural gas	Petroleum gas, pro- ducer gas, coal gas, coke-oven gas, Blast furnace gas, carbu- retted gas, sewer gas.

Combustion of Fuels

(i)
$$C + O_2 = CO_2$$

$$1 \text{ kg (Carbon)} + \frac{8}{3} \text{ kg (Oxygen)}$$

$$=\frac{11}{3}$$
 kg (Carbon dioxide)

(ii)
$$2C + O_2 = 2CO$$

 $2 \text{ mol} + 1 \text{ mol} = 2 \text{ mol}$

$$1 \text{ mol} + \frac{1}{2} \text{ mol} = 1 \text{ mol}$$

$$24 + 32 = 56$$

$$1 \text{ kg (Carbon)} + \frac{4}{3} \text{ kg (Oxygen)}$$

$$=\frac{7}{3}$$
 kg (Carbon monoxide)

$$\begin{array}{rcl}
2C & + & O_2 & = & 2CO_2 \\
2 \text{ vol} & + & 1 \text{ vol} & = & 2 \text{ vol}
\end{array}$$

$$1 \text{ vol } + \frac{1}{2} \text{ vol } = 1 \text{ vol}$$

$$1 \text{ kg (Carbon)} + \frac{4}{7} \text{ kg (Oxygen)}$$

$$=\frac{11}{7}$$
 kg (Carbon dioxide)

(iv) Sulphur-

= 2 kg (Sulphur dioxide)

(v) Hydrogen —

$$2H_2 + O_2 = 2H_2O$$

$$1\text{vol} + \frac{1}{2}\text{vol} = 1\text{vol}$$

$$4 + 32 = 36$$

Air Fuel Ratio (AFR)—The air fuel ratio is the most common reference term used for mixtures in internal combustion engines. It is the ratio between the mass of air and the mass of fuel, in the fuel-air mixtures at any given moment. For pure octane the Stoichiometric mixture is approximately 14.7:1 or λ of 1.00 exactly. In naturally aspirated engines powered by octane, maximum power is frequently reached at AFRs ranging from 12.5 - 13.3 : 1 or of $\lambda 0.85 - 0.901$ or AF = mass of Air/mass of fuel.

Fuel Air Ratio (FAR)—It is commonly used in the gas turbine industry as well as government studies of internal combustion engine and refers to the ratio of fuel to the air, it is 1/AFR.

OBJECTIVE QUESTIONS

- 1. For isothermal expansion of a perfect gas, the value of $\frac{\Delta P}{P}$ is equal to—
 - $(A) \ -\gamma^{1/2} \frac{\Delta V}{V} \qquad \qquad (B) \ -\frac{\Delta V}{V}$

 - (C) $\gamma \frac{\Delta V}{V}$ (D) None of these
- 2. The gas law $\frac{PV}{T}$ = constant, is true for—
 - (A) Isothermal changes only
 - (B) Adiabatic changes only
 - (C) Both isothermal and adiabatic changes
 - (D) Neither adiabatic isothermal changes
- Air in a cylinder is suddenly compressed by a piston with the passage of time—
 - (A) The pressure decreases
 - (B) The pressure increases
 - (C) The pressure may remain constant
 - (D) The pressure may increase or decrease depending upon the nature of gas
- The work done in an adiabatic change on a particular gas depends upon only—
 - (A) Change in value
 - (B) Change in pressure
 - (C) Change in temperature
 - (D) None of the above
- The work done in an isothermal expansion of a gas depends upon—
 - (A) Temperature
 - (B) Expansion ratio only
 - (C) Both temperature and expansion ratio
 - (D) Neither temperature nor expansion ratio

- The first law of thermodynamics is concerned with the conservation of—
 - (A) Number of molecules
 - (B) Temperature
 - (C) Energy
 - (D) Number of moles
- A Carnot engine works between a hot reservoir at temperature T₁ and a cold reservoir at temperature T2. To increase the efficiency—
 - (A) T₁ and T₂ both should be increased
 - (B) T₁ and T₂ both should be decreased
 - (C) T₁ should be decreased and T₂ increased
 - (D) T₁ should be increased and T₂ decreased
- 8. Which of the following is an intensive property of a thermodynamic system?
 - (A) Volume
- (B) Temperature
- (C) Mass
- (D) Energy
- Which of the following is the extensive property of a thermodynamic system?
 - (A) Pressure
- (B) Volume
- (C) Temperature
- (D) Density
- The temperature at which the volume of a gas becomes zero is called—
 - (A) Absolute scale temperature
 - (B) Absolute zero temperature
 - (C) Absolute temperature
 - (D) None of the above
- The unit of energy in SI system is—
 - (A) Joule (J)
- (B) Joule metre (Jm)
- (C) Watt (W)
- (D) Joule/metre (J/m)
- One watt is equal to—
 - (A) 1 Nm
- (B) 1 N/min
- (C) 10 N/s
- (D) 1000 Nm/s

10 | Mech. Engg.

- One joule (J) is equal to—
 - (A) 1 Nm
- (B) K Nm
- (C) 10 Nm/s
- (D) 10 K Nm/s
- 14. The heating and expanding of a gas is called—
 - (A) Thermodynamic system
 - (B) Thermodynamic cycle
 - (C) Thermodynamic process
 - (D) Thermodynamic law
- 15. Which of the following statement is correct?
 - (A) The slope of vaporisation curve is always negative
 - (B) The slope of vaporisation curve is always positive
 - (C) The slope of sublimation curve is negative for all pure substances
 - (D) The slope of fusion curve is positive for all pure substances
- The specific volume of water when heated at $0^{\circ}C-$
 - (A) First increases and then decreases
 - (B) First decreases and then increases
 - (C) Increases steadily
 - (D) Decreases steadily
- Internal energy of a perfect gas depends on—
 - (A) Temperature, specific heat and pressure
 - (B) Temperature, specific heat and enthalpy
 - (C) Temperature, specific heat and entropy
 - (D) Temperature only
- In reversible polytropic process—
 - (A) True heat transfer occurs
 - (B) The entropy remains constant
 - (C) The enthalpy remains constant
 - (D) The internal energy remains constant
- An isentropic process is always—
 - (A) Irreversible and adiabatic
 - (B) Reversible and isothermal
 - (C) Frictionless
 - (D) Reversible and adiabatic
- Second law of thermodynamics defines—
 - (A) Heat
- (B) Work
- (C) Enthalpy
- (D) Entropy
- 21. For any reversible adiabatic process, the change in entropy is-

- (A) Zero
- (B) Minimum
- (C) Maximum
- (D) Infinite
- 22. For any reversible process, the change in entropy of the system and surrounding is-
 - (A) Zero
- (B) Unity
- (C) Negative
- (D) Positive
- Kelvin-Planck's law deals with—
 - (A) Conservation of energy
 - (B) Conservation of heat
 - (C) Conservation of mass
 - (D) Conservation of heat into work
- The property of a working substance which increases or decreases as the heat is supplied or removed in a reversible manner is known as—
 - (A) Enthalpy
- (B) Internal energy
- (C) Entropy
- (D) External energy
- The entropy may be expressed as a function of—
 - (A) Pressure and Temperature
 - (B) Temperature and Volume
 - (C) Heat and work
 - (D) All of the above
- The change of entropy, when heat is absorbed by the gas is—
 - (A) Positive
 - (B) Negative
 - (C) Positive and negative
 - (D) None of the above
- Gibb's function is expressed as—
 - (A) $(u + PV T_S)$ (B) (u + PV + Tds)
- - (C) (u + PdV Tds) (D) (u + PV SdT)
- Availability function is expressed as—
 - (A) $a = (u + P_0V T_0S)$
 - (B) $a = (u + P_0 dV T_0 ds)$
 - (C) $a = (du + P_0dV T_0ds)$
 - (D) $a = (u + P_0V + T_0S)$
- For each mole of oxygen, number of moles of nitrogen required for complete combustion of carbon are—
 - (A) 20/21
- (B) 2/21
- (C) 77/21
- (D) 79/21
- The most important solid fuel is—
 - (A) Wood
- (B) Charcoal
- (C) Coal
- (D) All of the above

- A chemical fuel is a substance which releases on combustion.
 - (A) Chemical energy
 - (B) Heat energy
 - (C) Sound energy
 - (D) Magnetic energy
- 32. The smallest particle which can take part in a chemical change is called?
 - (A) Atom
- (B) Molecule
- (C) Electron
- (D) Compound
- The relative humidity during cooling and dehumidification of moist air—
 - (A) Increases
 - (B) Decreases
 - (C) Can increase or decrease
 - (D) Remains constant
- The relative humidity, during sensible heating —
 - (A) Can increase or decrease
 - (B) Increase
 - (C) Decrease
 - (D) Remains constant
- 35. An air washer can work as a-
 - (A) Filter only
 - (B) Humidifier only
 - (C) Dehumidifier only
 - (D) All of the above
- Rankine cycle efficiency of a good steam power plant may be in the range of—
 - (A) 15 to 20%
- (B) 35 to 45%
- (C) 70 to 80%
- (D) 90 to 95%
- In case of hyperbolic expansion of a gas, the heat supplied is the work done.
 - (A) Equal to
- (B) More than
- (C) Less than
- (D) None of these
- The reversible engines are
 - (A) Least efficient
 - (B) Most efficient
 - (C) Having same efficiency as reversible engines
 - (D) None of the above
- Gases could have an infinite number of specific heats but only specific heats are defined.
 - (A) One
- (B) Two
- (C) Three
- (D) Four

- 40. Alcohol is a liquid fuel obtained from-
 - (A) Vegetable matter (B) Crude oil
 - (C) Coal
- (D) None of these
- 41. Which one of the following processes or systems does not involve heat?
 - (A) Steady processes
 - (B) Isothermal processes
 - (C) Adiabatic processes
 - (D) Thermal processes
- 42. For storing a gas which one of the following types of compression will be ideal?
 - (A) Constant volume
 - (B) Polytropic
 - (C) Adiabatic
 - (D) Isothermal
- 43. Which one of the following gases obeys kinetic theory perfectly?
 - (A) Perfect gas
- (B) Pure gas
- (C) Monoatomic gas (D) Diatomic gas
- 44. is not a property of the system.
 - (A) Pressure
- (B) Temperature
- (C) Heat
- (D) Specific volume
- 45. Exhaust gases from an engine possess which of the following energies ?
 - (A) Chemical energy (B) Potential energy
 - (C) Solar energy
- (D) Kinetic energy
- 46. Diffusion is
 - (A) Mixing of unlike fluids
 - (B) Mixing of two portions of fluid
 - (C) Mixing of a gas in two containers at different pressure
 - (D) Mixing of two portions of a fluid at different temperature
- 47. First law of thermodynamics gives relationship between which of the following?
 - (A) Heat and internal energy
 - (B) Heat and work
 - (C) Heat, work and properties of the system
 - (D) None of the above
- 48. The temperature in a process in which work is done by expanding a gas under adiabatic condition will—
 - (A) Decrease
 - (B) Increase
 - (C) First decrease then increase
 - (D) Remain unaltered

- 12 | Mech. Engg.
- 49. Theoretically, a petrol engine operates on cycle.
 - (A) Constant entropy
 - (B) Constant pressure
 - (C) Constant volume
 - (D) Constant temperature
- 50. cycle has the maximum efficiency.
 - (A) Brayton
- (B) Carnot
- (C) Rankine
- (D) Stirling
- Carnot cycle is a cycle.
 - (A) Quasi-static
- (B) Semi-reversible
- (C) Reversible
- (D) Irreversible
- 52. is an irreversible cycle.
 - (A) Stirling cycle
- (B) Ericsson cycle
- (C) Carnot cycle
- (D) None of the above
- 53. To which of the following are Maxwell's thermodynamics relations applicable?
 - (A) Thermodynamic processes
 - (B) Mechanical System in equilibrium
 - (C) Chemical System in equilibrium
 - (D) Reversible process
- A frictionless heat engine can be 100 per cent efficient if its exhaust temperature is—
 - (A) 0°C
 - (B) 0°K
 - (C) Equal to internal temperature
 - (D) None of the above
- Water contained in a beaker can be made to boil by passing steam through it—
 - (A) At a pressure below the atmospheric pressure
 - (B) At atmospheric pressure
 - (C) At a pressure greater than atmospheric pressure
 - (D) Any of the above
- 56. is the unit of entropy.
 - (A) J/kg
- (B) kJ/K
- (C) J/K
- (D) J/kgs
- 57. The thermodynamics primarily deals in change of state from-
 - (A) Electrical energy to useful work done
 - (B) Wind power to useful work
 - (C) Heat to work
 - (D) None of the above

- 58. In engineering thermodynamics the approach towards matter is—
 - (A) Macroscopic
 - (B) Microscopic
 - (C) Macroscopic and microscopic
 - (D) None of the above
- A system is a specific space surrounded by a boundary. A thermodynamics analysis is concerned with —
 - (A) Enery transfer only
 - (B) Mass transfer only
- (C) Energy and mass transfer only
 - (D) None of the above
- In a closed system—
 - (A) Energy transfers from surrounding to
 - (B) Energy transfers from system to surrounding
 - (C) Energy transfers from system to surrounding and vice versa
 - (D) Energy as well as mass cross the boundaries
- 61. The condition for as irreversible cyclic process is—

 - (A) $\oint = \frac{\delta Q}{T} = 0$ (B) $\oint = \frac{\delta Q}{T} < 0$
 - (C) $\oint \frac{\delta Q}{T} > 0$
- (D) None of these
- The condition for a reversible cyclic process
 - (A) $\oint \frac{\delta Q}{T} = 0$ (B) $\oint \frac{\delta Q}{T} < 0$
- - (C) $\oint \frac{\delta Q}{T} > 0$
- (D) None of these
- 63. Internal energy of a perfect gas is a function of—
 - (A) Temperature only
 - (B) Temperature and pressure
 - (C) Pressure only
 - (D) Volume only
- 64. The mechanical equivalent of heat 'J' is equal to—
 - (A) 4·1868 kg/K.cal.
 - (B) 41.8 kJ/K.cal.
 - (C) 4·1868 kJ/K.cal
 - (D) None of the above

- According to first law of thermodynamics—
 - (A) $\int dW = J \int dQ$
- (B) $\int dW < \int \int dQ$
- (C) $\int dW > \int \int dQ$
- (D) None of the above
- Centrifugal pump is an example of—
 - (A) Isolated system
 - (B) Closed system
 - (C) Steady flow system
 - (D) None of the above
- Flow of energy is due to—
 - (A) Transfer of mass across the boundaries of the system
 - (B) Change of temperature
 - (C) Height above the earth surface
 - (D) None of the above
- Bomb calorimeter is an example of—
 - (A) Open system
 - (B) Closed system
 - (C) Steady flow system
 - (D) Isolated system
- 69. Liquids have—
 - (A) Two distinct values of specific heat
 - (B) Only one value of specific heat
 - (C) Different values of specific heat at same temperature
 - (D) No specific heat
- 70. For any gas—
 - (A) $C_p = C_v$
- (B) $C_p < C_v$
 - (C) $C_p > C_v$
- (D) None of these
- 71. Which is correct?
 - (A) $C_p C_v = R \times J$ (B) $C_p C_v = R/J$
 - (C) $C_p C_v = J/R$ (D) $C_p C_v = R J$
- The absolute temperature on centigrade scale at which volume of gas becomes zero is—
 - (A) -460°C
- (B) 273°C
- (C) +80°C
- (D) +100°C
- Molar volume is equal to—
 - (A) 22.41 m³ at N.T.P.
 - (B) 2.241 m³ at N.T.P.
 - (C) 29·27 m³ at N.T.P.
 - (D) 1.03 m³ at N.T.P.
- 74. General energy equation for steam boiler is given by —
 - (A) $Q = H_2 H_1$

- (B) $Q = H_1 + H_2$
- (C) $Q = H_2 H_1 + Work done$
- (D) Q = H₂ H₁ + Kinetic energy
- According to law of conservation of energy
 - (A) dQ = dW
- (B) dQ = dU
- (C) dQ = dW dU (D) dQ = dW + dU
- 76. Enthalpy (H) is equal to-
 - (A) $U + \frac{PV}{J}$ (B) $U \frac{PV}{J}$
 - (C) $U + \frac{R}{IPV} = 1$ (D) V + JPV
- 77. In a throttling process the—
 - (A) Volume remains constant
 - (B) Pressure remains constant
 - (C) Temperature remains constant
 - (D) All the three remain constant
- Work done will be zero in case of—
 - (A) Isothermal process
 - (B) Adiabatic process
 - (C) Free expansion
 - (D) None of the above
- Constant volume process is also known as—
 - (A) Isotropic process
 - (B) Hyperbolic process
 - (C) Isometric process
 - (D) Polytropic process
- 80. When a gas is heated according to the $P \times V =$ Constant the expansion is called—
 - (A) Hyperbolic
- (B) Polytropic
- (C) Free expansion (D) None of these
- If H₁ and H₂ are initial and final enthalpy of a given fluid, then in throttling process-
 - (A) $H_1 > H_2$
- (B) $H_1 < H_2$
- (C) $H_1 = H_2$
- (D) None of these
- A refrigeration system works on—
 - (A) Second law of thermodynamics
 - (B) First law of thermodynamics
 - (C) Zeroth law of thermodynamics
 - (D) None of the above
- 83. Which of the following cycle has the highest efficiency?
 - (A) Otto cycle
- (B) Carnot cycle
- (C) Stirling cycle
- (D) Joule cycle

14	Mech. Engg.			
84.	Gas turbine works on (A) Constant volume (B) Otto cycle (C) Ericsson cycle (D) Joule cycle		95.	 (B) 8/3 kg of oxygen (C) 3/8 kg of oxygen (D) None of the above 100 kg of air contains— (A) 21 kg of oxygen (B) 35 kg of oxygen
85.	Thermal power plant (A) Rankine cycle (B) Otto cycle (C) Joule cycle (D) Constant pressur		96.	 (C) 23 kg of oxygen (D) 73 kg of oxygen Bomb calorimeter is used for determining— (A) Specific gravity of fuel (B) Calorific value of fuel (C) Specific heat of fuel
86.	Petrol engine works of (A) Constant pressur (B) Constant volume (C) Joule cycle (D) Rankin cycle	re cycle	97.	(D) Viscosity of fuel The volumetric analysis of dry products of combustion is done by— (A) Bomb calorimeter (B) Viscosity meter
87.	Constant volume cycle (A) Otto cycle (C) Joule cycle	le is also known as— (B) Rankin cycle (D) Atkinson cycle	98.	(C) Orsat apparatus(D) CalorimeterThe kerosene is generally used as a fuel—
88.	Joule cycle is also kn (A) Ericsson cycle (C) Carnot cycle	(B) Otto cycle		(A) For road fraction(B) For lighting and cooking(C) In thermal power plants
89.	Reverse Joule cycle is (A) Ericsson cycle (B) Atkinson cycle (C) Bell Coleman cy (D) Otto cycle		99.	(D) For industrial furnaces The percentage of carbon in crude oil varies between— (A) 83% to 87% (B) 50% to 60% (C) 90% to 94% (D) 40% to 45%
90.	Which one is natural (A) Charcoal (C) Peat	solid fuel ? (B) Coke (D) None of these	100.	The ratio of root mean square velocity to average velocity of gas molecules at a particular temperature is— (A) 0.086 (B) 1.086
91.	Coke is prepared from (A) Peat (C) Bituminous	n— (B) Wood (D) Producer gas	101.	(C) 3.086 (D) 4.086 The velocity of molecules— (A) Increases with the increase of tempera-
92.	carbon ? (A) Wood	(B) Coke		ture (B) Increases with the decrease of temperature (C) Decreases with the increase of tempera-
93.	(C) Lignite The solid fuel having value is— (A) Wood	(D) Coal ng the highest calorific (B) Lignite	102.	ture (D) Remains constant at all temperatures The work done in free expansion process is—
94.	(C) Coke For complete combus required— (A) 8 kg of oxygen	(D) Anthracite stion of 1 Kg of carbon is	103.	(A) Zero (B) Minimum (C) Maximum (D) Positive In a steady flow process— (A) The mass flow rate is constant

- (B) The work transfer rate is constant (C) The heat transfer rate is constant
- (D) All of the above
- 104. When a gas is heated at constant volume—
 - (A) Its pressure will increase
 - (B) Its temperature will increase
 - (C) Both temperature and pressure will increase
 - increase
- 105. The hyperbolic process is governed by—
 - (A) Boyle's law
- (B) Charle's law
- (C) Gay-Lussac law (D) Joule's law
- 106. The general law of expansion or compression is $PV^n = C$. The process is said to be hyperbolic, if *n* is equal to—
 - (A) ∞
- (B) 0
- (C) 1
- (D) y
- The value of gas constant (R) is—
 - (A) 2·87 J/kgK
- (B) 287 J/kgK
- (C) 28·7 J/kgK
- (D) 0.287 J/kgK
- 108. The value of universal gas constant (R_u) is—
 - (A) 8314 J/kgK
- (B) 8·314 J/kgK
- (C) 83·14 J/kgK
- (D) 831·4 J/kgK
- 109. The value of C_p/C_v for air is—
 - (A) 1·2
- (B) 1·3
- (C) 1·4
- (D) 2·3
- Atmospheric pressure is equal to—
 - (A) 1.013 bar
- (B) 760 mm of Hg
- (C) 101·3 kN/m²
- (D) All of these
- 111. When neither mass or energy is allowed to cross the boundary of a system, it is then called—
 - (A) Open system
- (B) Closed system
- (C) Isolated system (D) None of these
- 112. Kelvin-Planck's law deals with—
 - (A) Conservation of heat
 - (B) Conservation of mass

- (C) Conservation of heat into work
- (D) Conservation of work
- 113. Which of the following is not a thermodynamic property?
 - (A) Pressure
 - (B) Temperature
 - (C) Heat
 - (D) Specific volume
- (D) Neither temperature nor pressure will 114. The efficiency of Diesel cycle approaches to otto cycle efficiency when-
 - (A) Cut-off is increased
 - (B) Cut-off is decreased
 - (C) Cut-off is zero
 - (D) Cut-off is constant


Answers

1. (B)	2. (C)	3. (A)	4.(C)	5.(C)
6. (C)	7. (D)	8.(B)	9.(B)	10.(B)
11. (A)	12.(A)	13. (A)	14.(B)	15. (A)
16. (B)	17.(D)	18. (A)	19. (D)	20. (D)
21. (A)	22.(A)	23. (D)	24.(C)	25. (A)
26. (A)	27.(A)	28. (A)	29. (D)	30.(C)
31. (B)	32.(A)	33.(C)	34.(B)	35. (D)
36. (B)	37.(A)	38.(B)	39.(B)	40. (A)
41. (C)	42.(D)	43. (A)	44.(C)	45. (D)
46. (A)	47. (C)	48. (A)	49.(C)	50.(B)
51. (C)	52.(D)	53.(C)	54.(B)	55.(C)
56. (B)	57. (C)	58. (A)	59.(C)	60.(C)
61. (B)	62.(A)	63. (A)	64.(C)	65. (A)
66. (C)	67.(A)	68.(B)	69.(B)	70.(C)
71. (B)	72. (B)	73. (A)	74. (A)	75. (D)
76. (A)	77. (C)	78.(C)	79.(C)	80. (A)
81. (C)	82.(A)	83.(B)	84.(C)	85. (A)
86. (B)	87.(A)	88. (D)	89. (D)	90.(C)
91. (C)	92. (B)	93. (D)	94.(B)	95.(C)
96. (B)	97. (C)	98.(B)	99. (A)	100.(B)
101.(A)	102.(A)	103. (D)	104.(C)	105. (A)
106. (C)	107. (B)	108. (A)	109.(C)	110. (D)

111. (C) 112. (C) 113. (C) 114. (B)

Atomic Structure

Atom may be regarded as a sphere of diameter 10⁻¹⁰ meter but whole of the positive charge and almost the entire mass of the atom is concentrated in a small central core called nucleus having diameter of about 10⁻¹⁴ metre and the nucleus is surrounded by electrons. As the atom is electrically neutral, the total positive charge on the nucleus is equal to the total negative charge of the electrons in it. Electrons revolve around the nucleus in circular orbits, the necessary centripetal force is provided to them by the electrostatic force of attraction.

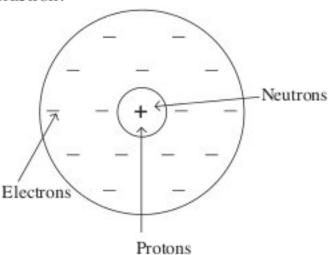

Proton

Proton is a positively charged particle. The magnitude of charge on it is 1.6×10^{-19} coulomb. Further rest mass is 1836.1 times the rest mass of electron. The rest mass of proton is 1.6725×10^{-27} kg. It has got intrinsic angular momentum (spin) equal to $\frac{1}{2}$. It is denoted by $_1H^1$. It means that its atomic weight is 1 and atomic number is also 1.

Neutron

Neutron possesses no charge and its rest mass is 1838.6 times the rest mass of electron. Neutron has got intrinsic angular momentum equal to that of proton. It is represented by $_0n^1$. It means that its atomic weight is 1 and atomic number is zero.

Isotopes

The atoms of an element which have the same atomic number but different mass number are called isotopes. Such elements cannot be separated by chemical means and different techniques have been developed for their separation and to study their relative abundance.

Isobars

The atoms of an element which have the same mass number but different atomic number are called isobars. The chemical properties of isobars are different.

Example—(i)
$$_{18}Ar^{40}$$
, $_{20}Ca^{40}$ (ii) $_{32}Ge^{76}$, $_{34}Se^{76}$ (iii) $_{1}H^{3}$, $_{2}He^{3}$

Isotones

The nuclei having equal number of neutrons are called isotones. For them, both the atomic number (Z) and the atomic mass (A) are different, but the value of A – Z is same.

Example—(i)
$$_3Li^7$$
, $_4Be^8$ (ii) $_1H^3$, $_2He^4$ (iii) $_{11}Na^{23}$, $_{12}Mg^{24}$

Nuclear Fission

When a big fragment such as Uranium(235) is bombarded with neutrons, this phenomenon of splitting of a heavy nucleus into two nearly equal parts Barium(141) and Krypton(92) with the release of considerable or huge energy is called nuclear fission.

$$_{92}U^{235} + _{0}n^{1} \rightarrow _{92}U^{236} \rightarrow _{56}Ba^{141} + _{36}Kr^{92} + 3_{0}n^{1} + 200 \text{ MeV}$$

A nucleus which splits in this way is called a fissionable one. This is the principle of atom bomb. The liquid drop model of nucleus gives the clear concept of the nuclear fission process.

Nuclear fusion

Nuclear fusion is the process in which two light elements combine to form a new light element with the release of energy due to the disappearance of mass in the process of union of the nuclei. This is the principle of hydrogen bomb and it is believed that the sun's energy is due to this nuclear fusion process.

The reaction going on in hydrogen bomb is: ₁H² (Deuterium) + ₁H² (Deuterium)

$$\rightarrow$$
 ₂He⁴ (Helium) + ₀n¹ + 3·3 MeV
₁H² (Deuterium) + ₁H³ (Tritium)

$$\rightarrow$$
 ₂He⁴ (Helium) + ₀n¹ + 17·6 MeV

Thermal Neutrons

The neutrons which have been slowed down as a result of the collisions against the hydrogen nuclei of the moderator are called thermal neutrons. Such neutrons possess energy corresponding to room temperature neutrons are used to cause the fission of 92U235 nuclei.

Work Function

The minimum energy of photon required to liberate an electron from the given metal surface is known as photo-electric work function.

Types of Power Plants

The principal types of power plants are as under:

- Steam plant using coal, oil or nuclear fission.
- Internal combustion engine plants.
- Gas turbine plants.
- Hydro-electric plants.

Essential Components of a Nuclear Reactor


The essential components of a nuclear reactor are as follows:

- Reactor core
- Reflector
- Control mechanism
- Moderator
- Coolants
- Measuring instruments
- Shielding

Types of Nuclear Reactors

- Pressurised water reactor (PWR)
- Boiling water reactor (BWR)
- CANDU (Canadian–Deuterium–Uranium) reactor
- Gas cooled reactor
- Liquid metal cooled reactor
- Breeder reactor

Main Components of a Nuclear Power Plant

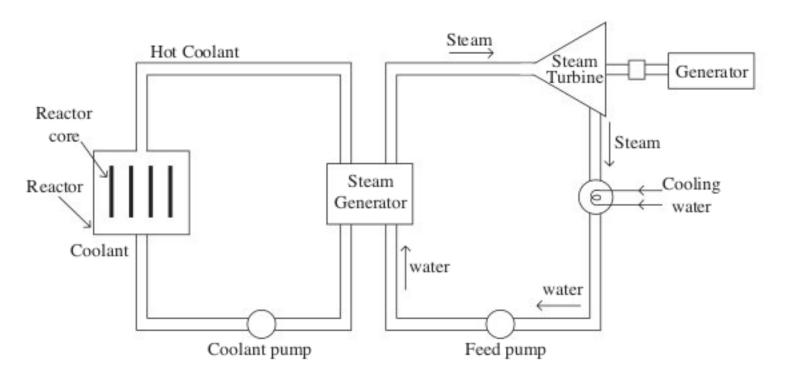

18 | Mech. Engg.

The main components of a nuclear power plant are:

- Nuclear reactor
- Heat exchanger (Steam generator)
- Steam turbine
- Condenser
- Electric generator

In a nuclear power plant the reactor performs the same function as that of the furnance of steam power plant. The heat liberated in the reactor as a result of the nuclear fission of the fuel is taken up by the coolant circulating through the reactor core. Hot coolant leaves the reactor at the top and then flows through the tubes of steam generator and passes on its heat to the feed water. The steam so produced expands in the steam turbine, producing work and thereafter is condensed in the condenser.

The steam turbine in turn runs an electric generator thereby producing electric energy. Here parts are:

- Moderator Moderator is the material used to slow down the speed of the neutrons.
- (2) Reflector—The function of reflector is to prevent escaping of neutrons and to reflect them back into the core.
- (3) Shield—The reactor core and the cooling circuit is shielded to prevent leakage of hazardous radiation from the plant.
- (4) Control Rods—The rods used to control the chain reaction in the reactor core are known as control rods.
- (5) Coolants—Coolants are used to carry away the heat from the core for generating steam. The various coolants used are helium, water, liquid, metals, hydrogen etc.

OBJECTIVE QUESTIONS

- Electron was discovered by—
 - (A) Faraday
- (B) Rutherford
- (C) Thomson
- (D) Kongen
- 2. The ratio of specific charge of an electron to that of an α -particle is—
 - (A) 1:4
- (B) 1:2
- (C) 4:1
- (D) 2:1
- When an electron moves in a transverse magnetic field, its path becomes—
 - (A) Straight line
- (B) Circular
- (C) Parabola
- (D) Elliptical
- 4. The size of an electron is of the order of-
 - (A) Fermi
- (B) Angstrom
- (C) Micron
- (D) Nanometer
- 5. Cathode rays consist of a beam of-
 - (A) Proton
- (B) Positive ions
- (C) Electron
- (D) None of these
- The radius of the nucleus is of the order of—
 - (A) 10⁻¹⁵ m
- (B) 10⁻¹⁸ m
- (C) 10⁻¹⁴ m
- (D) 10⁻¹⁶ m
- The ratio of the size of an atom to that of nucleus is equal to—
 - (A) 10⁻⁴
- (B) 10⁻⁵
- (C) 10⁻³
- (D) 10⁸

- 8. The nucleus of an atom consists of-
 - (A) Protons
 - (B) Protons and electrons
 - (C) Protons and neutrons
 - (D) None of the above
- 9. The binding energy of hydrogen atom is-
 - (A) 1 eV
- (B) Infinite
- (C) −13·6 eV
- (D) Zero
- Nuclear fission was discovered by—
 - (A) Rutherford
 - (B) Curie
 - (C) Becquerel
 - (D) Hahn and Strassmann
- Sun releases enormous amount of energy by the process known as—
 - (A) Fusion
- (B) Fission
- (C) Combustion
- (D) Impulsion
- 12. Which of the following helps in knowing about the stability of nucleus?
 - (A) Binding energy
 - (B) Binding energy per nucleon
 - (C) Both (A) and (B)
 - (D) None of these

- The commercial sources of energy are—
 - (A) Solar, wind, biomass
 - (B) Fossil fuels, hydropower and nuclear energy
 - (C) Wood, animal wastes and agriculture wastes
 - (D) None of the above
- Non-commercial sources of energy are—
 - (A) Wood, animal wastes and agricultural wastes
 - (B) Solar, wind, biomass
 - (C) Fossil fuels, hydropower and nuclear power
 - (D) None of the above
- The primary sources of energy are—
 - (A) Coal, oil and uranium
 - (B) Hydrogen, oxygen and water
 - (C) Wind, biomass and geothermal
 - (D) None of the above
- The secondary sources of energy are—
 - (A) Solar, wind and water
 - (B) Coal, oil and uranium
 - (C) Both (A) and (B)
 - (D) None of the above
- 17. India's first Nuclear Power Plant was built in the year—
 - (A) 1947
- (B) 1949
- (C) 1962
- (D) 1966
- 18. The percentage of O_2 by weight in atmospheric air is—
 - (A) 18%
- (B) 23%
- (C) 77%
- (D) 79%
- The percentage of O₂ by volume in atmospheric air is-
 - (A) 21%
- (B) 23%
- (C) 77%
- (D) 79%
- The proper indication of incomplete combustion is—
 - (A) High CO content in fuel gases at exit
 - (B) High CO₂ content in fuel gases at exit
 - (C) High temperature of fuel gases
 - (D) The smoking exhaust from chimney

- The main source of production of biogas is—
 - (A) Human waste
 - (B) Wet cow dung
 - (C) Wet livestock waste
 - (D) All the above
- India's first nuclear power plant was installed
 - (A) Tarapur
- (B) Kota
- (C) Kalpakkam
- (D) None of the above
- In fuel cell, the energy is converted into electrical energy.
 - (A) Mechanical
- (B) Chemical
- (C) Heat
- (D) Sound
- Solar thermal power generation can be achieved by —
 - (A) Using focussing collector or heliostales
 - (B) Using flat plate collectors
 - (C) Using a solar pond
 - (D) Anyone of the above system
- 25. The energy radiated by sun on a bright sunny day is approximately —
 - (A) 700 W/m²
- (B) 800 W/m²
- (C) 1 KW/m²
- (D) 2 KW/m²
- Thorium Breeder Reactors are most suitable for India because—
 - (A) These develop more power
 - (B) Its technology is simple
 - (C) Abundance of thorium deposits are available in India
 - (D) None of the above
- Rankine cycle is a—
 - (A) Reversible cycle
 - (B) Irreversible cycle
 - (C) Constant volume cycle
 - (D) None of the above
- A steam power station requires space—
 - (A) Equal to diesel power station
 - (B) More than diesel power station
 - (C) Both (A) and (B)
 - (D) None of the above
- Economiser is used to heat—
 - (A) Air
- (B) Feed water
- (C) Fuel gases
- (D) All of the above

20	Mech. Engg.		
	The modern steam turbines are— (A) Impulse turbines (B) Reaction turbines (C) Impulse-reaction turbines (D) None of the above The draught, which a chimney precalled—		 The function of a moderator in a nuclear reactor is— (A) To slow down the fast moving electrons (B) To speed up the slow moving electrons (C) To start the chain reaction (D) None of the above
	(A) Induced draught (B) Natural draught (C) Forced draught (D) Balanced draught	41.	 When a nuclear reactor is operating at constant power the multiplication factor is— (A) Less than unity (B) Greater than unity (C) Equal to unity (D) None of the above
32.	The draught produced by steel ch compared to that produced by brick for the same height is— (A) Less	chimney	. The conversion ratio of a breeder reactor is— (A) Equal to unity (B) More than unity (C) Less than unity (D) None of the above
	(B) More (C) Same (D) May be more or less	43.	 In the nuclear fission reactions isotope of uranium is used. (A) U²³⁵ (B) U²³⁴ (C) U²³⁸ (D) None of the above
33.	Thermal efficiency of a gas turbine compared to diesel engine plant is— (A) Higher (B) Lower (C) Same (D) None of the second control of the second contro	_ 44.	Tarapur nuclear power plant has— (A) Pressurised water reactors (B) Boiling water reactors
34.	Mechanical efficiency of a gas to compared to internal combustion cating engine is—	recipro-	(C) CANDU type reactors (D) None of the above Critical mass of fuel is the amount required
35.	(A) Higher (B) Lower (C) Same (D) None of the For a gas turbine the pressure ratio is	the above	to make the multiplication factor unity. (A) Equal to (B) Less than (C) More than (D) None of the above
	the range— (A) 2 to 3 (B) 3 to 5 (C) 16 to 18 (D) 18 to 22	46.	. The nuclear energy is measured in— (A) MeV (B) MW (C) Curie (D) None of the above
36.	A closed cycle gas turbine works on (A) Carnot cycle (B) Rankine (C) Joule cycle (D) Atkinson	cycle 47.	Fission chain reaction is possible when— (A) Fission produces the same number of neutrons which are absorbed
37.	Thermal efficiency of closed c turbine plant increases by— (A) Reheating (B) Intercool	ing	(B) Fission produces more neutrons than are absorbed
38.	(C) Regenerator (D) All of the The average thermal efficiency of nuclear power plant is about—	a modern	(C) Fission produces less neutrons than are absorbed(D) None of the above
	(A) 30% (B) 40% (C) 60% (D) 80%		 In nuclear chain fission reaction, each neutron which causes fission produces— (A) No new neutron
59.	Reflector of a nuclear reactor are of— (A) Boron (B) Cast iron	•	(B) One new neutron (C) More than one new neutron

(D) None of the above

(B) Cast iron

(D) Steel

(A) Boron

(C) Beryllium

- 49. is the most commonly used moderator.
 - (A) Graphite
- (B) Sodium
- (C) Deuterium
- (D) Any of the above
- 50. Which of the following are fertile materials?
 - (A) U²³⁸ and Th²³⁹
 - (B) U²³⁸ and Th²³²
 - (C) U²³³ and Pu²³⁹
 - (D) U²³⁸ and Pu²³⁹
- In a nuclear reactor the function of a reflector is to —
 - (A) Reduce the speed of the neutrons
 - (B) Stop the chain reaction
 - (C) Reflect the escaping neutrons back into the core
 - (D) All of the above
- 52. In a Gas Cooled Reactor (GCR) are used as moderator and coolant respectively.
 - (A) Heavy water and CO₂
 - (B) Graphite and air
 - (C) Graphite and CO₂
 - (D) None of the above
- A CANDU reactor uses—
 - (A) Only fertile material
 - (B) Highly enriched uranium (85% U²³⁵)
 - (C) Natural uranium as fuel and heavy water as moderator and coolant
 - (D) None of the above
- Fission of U²³⁵ releases energy.
 - (A) 200 MeV
- (B) 238 MeV
- (C) 431 MeV
- (D) None of the above
- Fast breeder reactors are best suited for India because—
 - (A) Of large thorium deposits
 - (B) Of large uranium deposits
 - (C) Of large plutonium deposits
 - (D) None of the above
- 56. Generally, how many number of Jets have in Pelton wheel?
 - (A) One
 - (B) Two
 - (C) Four
 - (D) Six

- 57. The function of a solar collector is to convert-
 - (A) Solar energy into electricity
 - (B) Solar energy into radiation
 - (C) Solar energy into thermal energy
 - (D) None of the above
- Most of the solar radiation received on earth surface lies within the range of—
 - (A) 0.2 to 0.4 microns
 - (B) 0.38 to 0.78 microns
 - (C) 0 to 0.38 microns
 - (D) None of the above
- Flat plate collector absorbs—
 - (A) Direct radiation only
 - (B) Diffuse radiation only
 - (C) Direct and diffuse both
 - (D) None of the above
- Temperature attained by a flat-plate collector is of the —
 - (A) Order of above 90°C
 - (B) Range of 100°C to 150°C
 - (C) Above 15°C
 - (D) None of the above
- A Pyranometer is used for measurement of—
 - (A) Direct radiation only
 - (B) Diffuse radiation only
 - (C) Direct as well as diffuse radiation
 - (D) None of the above
- Sun tracking is needed in the case of collector.
 - (A) Flate plate
 - (B) Cylindrical parabolic and paraboloid
 - (C) Both (A) and (B)
 - (D) None of the above
- The nucleus of an atom consists of—
 - (A) Protons and electrons
 - (B) Protons and neutrons
 - (C) Neutrons and electrons
 - (D) None of the above
- Each proton carries a single unit—
 - (A) Positive charge(B) Negative charge
 - (C) Neutral charge (D) Unpredictable
- Each neutron carries a single unit—
 - (A) Negative charge (B) Positive charge
 - (C) Neutral charge (D) None of the above

22	Mech. Engg.		
	Each electron carries a single unit— (A) Negative charge (B) Positive charge (C) Neutral charge (D) None of the above If A = mass number, Z = atomic number then number of neutrons in the nucleus are equal to—	76.	Pick up the correct equation in which alpha particles are emitted— (A) $_{92}U^{238} \rightarrow _{2}He^{4} + _{90}Th^{234}$ (B) $_{92}U^{238} \rightarrow _{2}He^{4} + _{92}Th^{238}$ (C) $_{92}U^{238} \rightarrow _{4}He^{2} + _{90}Th^{234}$ (D) $_{92}U^{238} \rightarrow _{2}He^{4} + _{94}Th^{142}$
68.	(A) A + Z (B) A - Z (C) A × Z (D) A / Z The method of identifying the element is— (A) zX ^A (B) X ^{AZ} (C) AX ^Z (D) X ^{A/Z}		The division of heavy nucleus into smaller ones is called— (A) Fusion (B) Fission (C) Vaporization (D) None of the above
69.	The lithium element is represented as ₃ Li ⁷ . The sum of protons and electrons is equal to— (A) 10 (B) 3 (C) 7 (D) K ⁴		Combining of light nuclei to form a single heavy nucleus is called— (A) Fusion (B) Fission (C) Solidification (D) Atomization Natural uranium is principally a mixture of— (A) Two isotopes (B) Three isotopes
	If carbon is represented as ${}_{6}C^{12}$, then the number of electrons are equal to— (A) 6 (B) 12 (C) 18 (D) 2 If Beryllium is represented as ${}_{5}Be^{9}$ then the	80.	(A) Two isotopes (B) Three isotopes (C) Four isotopes (D) None of the above The uranium isotope of atomic weight 233 (U ²³³) can be produced from— (A) U ²³⁵ (B) Pu ²³⁹
/1.	number of neutrons are equal to— (A) 9 (B) 5 (C) 14 (D) 4	81.	(C) Th ²³² (D) None of the above Which one of the following is fertile material (A) U ⁻²³⁵ (B) U ⁻²³⁹ (C) U ⁻²³³ (D) U ⁻²³⁸
72.	 (A) Kinetic energy (B) Binding energy of bombarding particles (C) Both K.E. and B.E. of bombarding particles (D) None of the above 		The readily fissionable material is— (A) Uranium-234 (B) Uranium-235 (C) Uranium-238 (D) All the above The material used for reactor vessel is— (A) Cast iron (B) Stainless steel
73.	Isotopes of the element has— (A) Same number of neutrons (B) Different number of neutrons (C) Same atomic weight (D) None of the above	84.	 (C) Mild steel (D) Copper The coolant used in a nuclear power plant is— (A) Heavy water (B) Freon (C) Carbon dioxide (D) Sulphur dioxide
	The radiation emitted are of— (A) Two type (B) Three type (C) Four type (D) None of the above	85.	In sodium graphite reactor the coolant used is— (A) Water (B) Graphite (C) Heavy water (D) Liquid-sodium
75.	Which one of the following is most harmful for the human body? (A) Alpha particles (B) Beta particles (C) Gamma particles (D) None of the above	86.	The term PWR stands for— (A) Power Water Reactor (B) Pressurized Water Reactor (C) Power Welding Rod (D) Power Work Reaction

nuclear power plant is— (A) Freon (B) Ammonia (C) Helium (D) Chlorine 88. Select the moderator used in a nuclear power plant — (B) Plutonium (A) Uranium (C) Hydrogen (D) Oxygen In a sodium graphite reactor, the moderator used is— (A) Heavy water (B) Light water (C) Graphite (D) None of the above 90. Which one of the followings have a better heat transfer property? (A) Light water (B) Heavy water (D) Dowtherm (C) Sodium The material used for shielding a core is— (A) Concrete (B) Thick galvanized sheets (C) Copper sheets (D) Aluminium sheets Concrete shield for acceptable level of radiation should be minimum— (A) 5 metre thick (B) 2 metre thick (C) 1 metre thick (D) 1/2 metre thick The scarm control rods are used to— (A) Control the chain reaction in the reactor (B) Prevent radiation from the reactor (C) Both (D) None of the above The moderator used in fast breeding reactor is— (A) Graphite (B) Liquid sodium (D) None of the above (C) Heavy water The fuel used in a pressurized water reactor is— (A) Enriched uranium (B) Radium (C) Thorium (D) Lead 96. The pressurized water uses light water

reactor as -

(A) Coolant

(B) Moderator

(C) Both (A) and (B)

(D) None of the above

87. The gas which is used as a coolant in a

- Mech. Engg. | 23 In a homogeneous reactor the fuel used is— (A) Uranium (B) Lead (C) Thorium (D) Uranyl sulphate in heavy water 98. Which of the element is natural radioactive? (A) Radium (B) Thorium (C) Uranium (D) All of the above In a heterogeneous reactor metallic uranium rods are used with — (A) Aluminium (B) Zirconium (C) Stainless steel (D) All of the above In boiling water reactor steam is generated— (A) In the reactor vessel (B) In the boiler (C) In the heat exchanger (D) None of the above The fuel mostly used in boilers is— (A) Brown coal (B) Peat (C) Caking bituminous coal (D) Non-caking bituminous coal 102. Which of the following gas has the highest calorific value? (A) Bio gas (B) Hydrogen (C) Butane (D) Methane 103. Which of the following fuel has the highest calorific value ? (A) Peat (B) Anthracite coal (D) Bituminous coal (C) Coke 104. Which of the following statement is incorrect? (A) The liquid fuels consist of hydrocarbons
 - - (B) The liquid fuels have higher calorific value than solid fuels
 - (C) A good fuel should have low ignition point
 - (D) The solid fuels have higher efficiency than liquid fuels
- Petrol is distilled at—
 - (A) 65°C to 220°C (B) 220°C to 345°C
 - (C) 345°C to 470°C (D) 410°C to 525°C

24 | Mech. Engg.

- 106. The fuel mostly used in blast furnace for extracting pig iron ores is—
 - (A) Bituminous coal (B) Soft coke
 - (C) Pulverised coal (D) Hard coal
- 107. Steam coal is a-
 - (A) Brown coal
 - (B) Non-caking bituminous coal
 - (C) Pulverised coal
 - (D) Caking bituminous coal
- The process in which heat transferred is equal to the change of enthalpy, is known as—
 - (A) Constant volume process
 - (B) Constant pressure process
 - (C) Constant entropy process
 - (D) Constant temperature process
- 109. The heating of wet steam at a constant temperature till it becomes dry saturated is similar to that of heating at a—
 - (A) Constant pressure
 - (B) Constant volume
 - (C) Constant entropy
 - (D) None of these
- One kg of carbon requires.....of oxygen and produces 7/3 kg of carbon monoxide—
 - (A) 7/3
- (B) 8/3
- (C) 4/3
- (D) 11/3
- 111. The mass of carbon per kg of fuel gas is given by—
 - (A) $\frac{7}{3}$ CO₂ + $\frac{3}{11}$ CO (B) $\frac{3}{7}$ CO₂ + $\frac{11}{3}$ CO
 - (C) $\frac{3}{11}$ CO₂ + $\frac{7}{3}$ CO (D) $\frac{3}{11}$ CO₂ + $\frac{3}{7}$ CO
- 112. Lancashire boiler is-
 - (A) Internally fired boiler
 - (B) Stationary fire tube boiler
 - (C) Horizontal boiler
 - (D) All of the above
- Locomotive boiler is a—
 - (A) Single tube, horizontal, internally fired and stationary boiler
 - (B) Single tube, vertical, externally fired and stationary boiler

- (C) Multi-tubular, horizontal, internally fired and mobile boiler
- (D) Multi-tubular, horizontal, externally fired and stationary boiler
- 114. Which of the following is a water tube boiler?
 - (A) Lancashire boiler
 - (B) Cochran boiler
 - (C) Locomotive boiler
 - (D) Badcock and Wilcox boiler
- A device used to increase the temperature of saturated steam without raising its pressure, is called—
 - (A) Fusible plug
- (B) Blow off cock
- (C) Superheater
- (D) Economiser

Answers

- 1.(C) 2.(B) 3.(B) 4.(A) 5.(C)
- 6. (C) 7. (A) 8. (C) 9. (C) 10. (D)
- 11.(A) 12.(B) 13.(B) 14.(A) 15.(A)
- 16. (A) 17. (C) 18. (B) 19. (A) 20. (A)
- 21.(D) 22.(A) 23.(B) 24.(D) 25.(C)
- 26. (C) 27. (A) 28. (B) 29. (B) 30. (C)
- 31. (B) 32. (B) 33. (B) 34. (A) 35. (B)
- 36. (C) 37. (D) 38. (A) 39. (C) 40. (A)
- 41. (C) 42. (B) 43. (A) 44. (B) 45. (C)
- 46.(A) 47.(B) 48.(C) 49.(A) 50.(B)
- 51 (0) 52 (0) 53 (0) 54 (1) 55 (1
- 51. (C) 52. (C) 53. (C) 54. (A) 55. (A) 56. (A) 57. (C) 58. (A) 59. (C) 60. (A)
- 61. (C) 62. (B) 63. (B) 64. (A) 65. (C)
- 66.(A) 67.(B) 68.(C) 69.(C) 70.(A)
- 71.(D) 72.(C) 73.(B) 74.(B) 75.(C)
- 76.(A) 77.(B) 78.(A) 79.(B) 80.(C)
- 81. (D) 82. (B) 83. (B) 84. (A) 85. (D)
- 86. (B) 87. (C) 88. (C) 89. (C) 90. (C)
- 91.(A) 92.(A) 93.(A) 94.(D) 95.(A)
- 96. (C) 97. (D) 98. (D) 99. (D) 100. (A)
- 101. (A) 102. (B) 103. (D) 104. (D) 105. (A)
- 106. (D) 107. (B) 108. (B) 109. (A) 110. (C)
- 111. (D) 112. (D) 113. (C) 114. (D) 115. (C)

Applied Mechanics

Applied mechanics deals with the application of laws of mechanics to the engineering problems.

Rigid Body

A rigid body is one which does not change its shape and size under the effect of force acting over it.

Newton's First Law of Motion

Every body continues in its state of rest or of uniform motion, in a straight line unless it is acted upon by some external force to change that state.

Newton's Second Law of Motion

The rate of change of momentum is directly proportional to the impressed force and takes place in the direction of the straight line in which the force acts.

Newton's Third Law of Motion

To every action there is an equal and opposite reaction.

Law of Conservation of Linear Momentum

Linear momentum = Mass × Velocity

$$p = m \times v$$

mutually interacting bodies then total linear momentum of the system is conserved.

$$F = \frac{dp}{dt}$$
if
$$F = 0$$
then
$$\frac{dp}{dt} = 0$$

$$\Rightarrow p = \text{constant}$$

$$p = mv = \text{constant}$$

Force

A force is said to be applied when it changes or tends to change the state of rest or of motion of the body upon which it acts.

In MKS system the unit of force is kg.wt. and in S.I. system is Newton.

$$1 \text{ kg.wt.} = 9.81 \text{ Newton.}$$

Laws of Force

The various laws used for the composition of forces are given as:

- (1) Parallelogram law of forces
- (2) Triangle law of forces
- (3) Polygon law of forces
- Parallelogram Law of Forces—If two forces acting simultaneously on a particle, be represented in magnitude and direction by the two adjacent sides of a parallelogram then their resultant may be represented in magnitude and direction by the diagonal of the parallelogram which passes through their point of intersection.
- (2) Triangle Law of Forces—If two forces acting simultaneously on a body are represented in magnitude and direction by the two sides of triangle taken in order then their resultant may be represented in magnitude and direction by the third side taken in opposite order.
- (3) Polygon Law of Forces-If a number of If no external force is applied on a system of coplanar concurrent forces, acting simultaneously on a body are represented in magnitude and direction by the sides of a polygon taken in order, then their resultant may be represented in magnitude and direction by the closing side of a polygon taken in the opposite order.

Scalars

Those physical quantities which express only magnitude are called scalars or scalar quantities. They are combined by simple algebraic rules, i.e. speed, distance, work, energy, power, mass, density, volume, area, time, electric current, potential difference, electromotive force etc.

Vectors

Those physical quantities which express magnitude and direction both are called vector quantities. They are combined by certain special rules such as triangle rule, parallelogram rule, and polygon rule. *i.e.* velocity, acceleration, displacement, force, linear momentum, torque, angular momentum, electric induction, gravitational field intensity *etc*.

Kinematical Equations

Motion with constant acceleration:

- (1) v = u + at
- (2) $v^2 = u^2 + 2as$
- $(3) \qquad s = ut + \frac{1}{2}at^2$
- (4) $s_n = u + \frac{(2n-1)^2}{2}$

Motion with constant velocity:

- (5) v = u
- (6) $v^2 = u^2$
- (7) s = ut

Retarded motion:

- (8) v = u at
- (9) $v^2 = u^2 2as$
- (10) $s = ut \frac{1}{2}at^2$

Motion starting from rest:

- (11) v = at
- (12) $v^2 = 2as$
- (13) $s = \frac{1}{2}at^2$

Motion with constant acceleration under gravity:

- $(14) \quad v = u + gt$
- $(15) \quad v^2 = u^2 + 2gh$
- (16) $h = ut + \frac{1}{2}gt^2$

Free fall (Body dropped):

- $(17) \quad v = gt$
- (18) $v^2 = 2gh$
- (19) $h = \frac{1}{2}gt^2$

Upward motion under gravity:

- $(20) \quad v = u gt$
- (21) $v^2 = u^2 2gh$
- (22) $h = ut \frac{1}{2}gt^2$

Downward motion on inclined plane:

- (23) $v = u + g \sin\theta \cdot t$
- $(24) \quad v^2 = u^2 + 2g \sin\theta \cdot s$
- (25) $s = ut + \frac{1}{2}g\sin\theta \cdot t^2$

Upward motion:

- (26) $v = u g \sin\theta \cdot t$
- $(27) \quad v^2 = u^2 2g \sin\theta \cdot s$
- (28) $s = ut \frac{1}{2}g \sin\theta \cdot t^2$


Motion starting from rest:

- (29) $v = g \sin\theta \cdot t$
- (30) $v^2 = 2g \sin\theta \cdot s$
- (31) $s = \frac{1}{2}g \sin\theta \cdot t^2$

Centripetal Force

When a particle moves on a circular path, a force always acts on it directed radially towards the centre of circle called centripetal force or central force.

$$F = \frac{mv^2}{r} = m \omega^2 = m \left(\frac{2\pi}{T}\right)^2 r = m (2\pi n)^2 r$$



Centrifugal Force

According to Newton's third law of motion, to every action there is an equal and opposite reaction. Hence the agent which exerts the centripetal force, itself experiences an equal force in the direction away from the centre. This is known as centrifugal reaction and this force is known as centrifugal force.

Lami's Theorem

"If three coplanar forces acting on a point in a body keep it in equilibrium, then each force is proportional to the sine of the angle between the other two forces."

If three coplanar forces P, Q and R acting at a point O. Let the angle between P and Q be γ, between Q and R be α and between R and P be β . If these forces are in equilibrium then according to Lami's theorem.

$$\frac{P}{\sin \alpha} = \frac{Q}{\sin \beta} = \frac{R}{\sin \gamma}$$

$$P_{\beta}$$

Varignon's Theorem

"The algebraic sum of the moments of two forces about any point in their plane is equal to the moment of their resultant about that point."

Projectile

Anything projected in space which moves freely under gravity is called, projectile. The path traversed by projectile is called Trajectory.

Velocity of Projection

The velocity with which a body is projected in space is called the velocity of projection.

Angle of Projection

The angle, which the initial velocity makes with the horizontal or at which a projectile is projected is called the angle of projection.

Range

The distance along the plane between the point of projection and point at which the projectile hits the plane at the end of its journey is called the range.

Time of Flight

This is the total time taken by the particle for which it remains in space or the time that elapses since it is projected and hits the plane again.

Maximum Height

The maximum vertical distance of projectile from the point of projection is known as its maximum height.

Friction

Friction is the property of solids due to which two solids which are in contact opposes their relative motion.

According to Newton's first law of motion, a body in motion should continue to move in a straight line but this does not happen and the body comes to rest after sometime. This is done by frictional force. When there is a relative motion between two solid surfaces which are in contact then a force of opposition is exerted by bodies on each other, known as frictional force.

Types of Friction

- Static friction
- (2) Limiting friction
- (3) Kinetic friction
- Static friction—The static friction is the friction offered by the surfaces subjected to external forces until there is no motion between them.
- (2) Limiting friction—Limiting force of friction may be defined as the maximum value of frictional force which exists when a body just begins to slide over the surface of the other body.
- (3) Kinetic friction—The kinetic friction is the friction experienced by a body when it is in motion. It is also known as Dynamic friction.

Collision

Collision is a such type of process in which two bodies mutually interact and exchange their momentum and kinetic energy.

Elastic Collision

Such collision in which linear momentum and K.E. both are conserved is known as elastic collision.

Inelastic Collision

In this type of collision K.E. is not conserved.

Work


When force is applied on a body and there is displacement in the direction of force then work is said to be done.

$$W = F \cos\theta \cdot S = F S \cos\theta = \overrightarrow{F} \cdot \overrightarrow{S}$$

S. I. unit = Newton metre or Joule.

Energy

It is capacity of doing work. Unit is Joule.

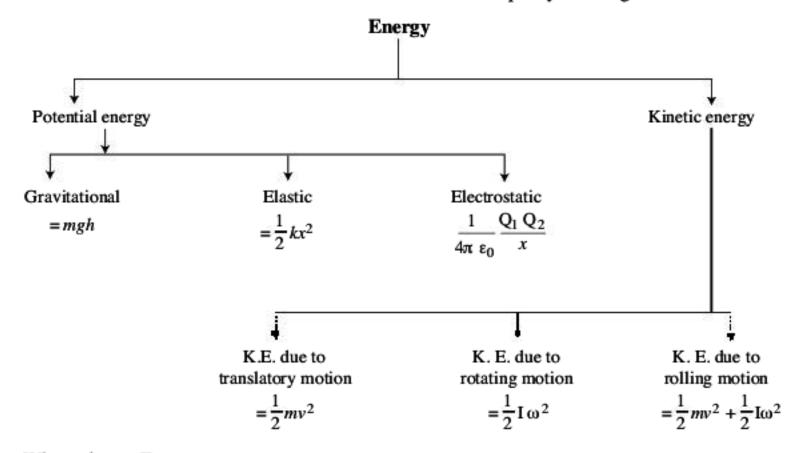

Where, $k \rightarrow$ Force constant

E → Permittivity of medium

I → Moment of inertia

Potential Energy

The energy which a body possesses by virtue of its position or configuration is called potential energy.

Kinetic Energy

The energy which a body possesses by virtue of its motion is called kinetic energy.

Law of Conservation of Energy

The total amount of energy in the universe is constant, energy can neither be created nor destroyed although it may be converted into various forms.

Power

It is the rate of doing work.

$$Power = \frac{Work}{Time}$$

1 Unit = Joule/sec. or watt.

Elasticity

It is the property of a substance due to which it regains its original shape on removal of external deforming force. Such substances are called elastic substances i.e. rubber, steel, quartz etc.

Plasticity

It is the property of substance due to which it does not regain its original shape on removal of external deforming forces. Such substances are known as plastic substances, *i.e.* lump of clay, lump of flour *etc*.

Brittle

Brittle substances are those which break on applying external forces, i.e. coal, stone, glass etc.

Hooke's Law

Provided the strain is small, the stress is proportional to the strain.

Stress
$$\propto$$
 Strain

Stress = E · Strain

$$E = \frac{Stress}{Strain}$$

Where E is a material constant.

Stress

On applying external deforming force on a body the internal reactionary force produced per unit area is called stress.

$$Stress = \frac{Force}{Area}$$

Type of Strain

- (i) Longitudinal Strain = $\frac{\text{Change in length}}{\text{Original length}}$
- (ii) Volume Strain = Change in Volume
 Original Volume
- (iii) Lateral Strain = $\frac{\text{Change in diameter}}{\text{Original diameter}}$
- (iv) Shearing Strain = $\frac{x}{h}$ = ϕ

Simple Harmonic Motion (S.H.M.)

If in a oscillatory motion acceleration is directly proportional to its displacement from mean position then such motion is known as S.H.M.

$$f \propto -x$$

Periodic Motion

A motion which is repeated after fixed interval of time is known as periodic motion, i.e. motion of hands of watch, motion of earth around the sun.

Oscillatory Motion

Such a motion which takes place to and fro a point and is repeated after a certain time interval is known as oscillatory motion, *i.e.* motion of simple pendulum.

Motion of Connected Bodies

 Motion of two bodies (M₁ and M₂) connected by a string passing over a smooth pulley.

Acceleration (a) =
$$\left(\frac{M_1 - M_2}{M_1 + M_2}\right) g$$

Tension (T) =
$$\frac{M_1 M_2}{M_1 + M_2}$$

and Reaction of the pulley

$$R = \frac{4 M_1 M_2}{M_1 + M_2}$$

(2) Motion of two bodies (M₁ and M₂) connected at the edge of a horizontal surface.

Acceleration (a) =
$$\left(\frac{M_1 - \mu M_2}{M_1 + M_2}\right) g$$

Tension (T) =
$$\frac{M_1 M_2 (1 + \mu)}{M_1 + M_2}$$

(3) Motion of two bodies (M₁ and M₂) connected by a string one end of which is hanging free and the other lying on a rough inclined plane.

Acceleration (a)

$$= \frac{2(M_1 - M_2 \sin \alpha - \mu M_2 \cos \alpha)}{M_1 + M_2}$$

Tension (T) =
$$\frac{M_1 M_2 (1 + \sin \alpha + \mu \cos \alpha)}{M_1 + M_2}$$

(4) Motion of two bodies (M₁ and M₂) connected over rough inclined planes.

Acceleration (a)

$$= \frac{g \binom{M_1 \sin \alpha_1 - M_2 \sin \alpha_2 - \mu_1 M_1 \cos \alpha_1}{-\mu_2 M_2 \cos \alpha_2}}{M_1 + M_2}$$

Tension (T)

$$= \frac{M_1 M_2}{M_1 + M_2} \left(\frac{\sin \alpha_1 + \sin \alpha_2 - \mu_1 \cos \alpha_1}{+ \mu_2 \cos \alpha_2} \right)$$

Newton's Universal Law of Gravitation

"Every body in the universe attracts every other body with a force directly proportional to the product of their masses and inversely proportional to the square of the distance separating them."

$$F = G \frac{m_1 m_2}{d^2}$$

Where F = Force of attraction between

them.

 m_1 , m_2 = Masses of the bodies

d = Distance between them

G = Universal gravitational constant

 $= 6.07 \times 10^{-11} \text{ Nm}^2/\text{kg}^2$

Also,
$$g = G \frac{M}{R^2}$$

Parking Orbit

If a satellite revolves round the earth such that its time period of revolution is equal to the time period of revolution of earth around its own axis then satellite are called parking satellite or geostationary satellite and the orbit in which satellite moves is called parking orbit.

Escape Velocity

The minimum velocity from the surface of celestial body with which when a body is projected never returns to its surface and crosses its gravitational field, called escape velocity from the surface of celestial body. Its value is different from surface of different celestial body. It mainly depends upon mass and radius of celestial body

$$V_e = \sqrt{\frac{2GM}{R}} = \sqrt{2gR}$$

Surface Tension

Surface Tension is a molecular property of liquid. Each liquid wants to minimise its free surface area. Rain drops are spherical due to this property.

If a line is imagined on the surface of liquid then force acting per unit length of line perpendicular to the line and tangent to the surface is known as Surface Tension.

$$T = \frac{F}{1}$$

S.I. unit = Newton/meter or kg/sec²

Factors affecting the Surface Tension —

- (1) Effect of impurities
- (2) Effect of current
- (3) Effect of temperature

OBJECTIVE QUESTIONS

- 1. Which of the following is a scalar?
 - (A) Force
 - (B) Electromotive force
 - (C) Torque
 - (D) None of the above
- 2. Which of the following is a scalar?
 - (A) Linear momentum
 - (B) Electric current
 - (C) Weight
 - (D) None of the above
- 3. Which of the following is not a polar vector?
 - (A) Force
 - (B) Angular velocity
 - (C) Weight
 - (D) None of the above
- 4. Which of the following is a Psuedo vector ?
 - (A) Force
 - (B) Gravitational field intensity
 - (C) Torque
 - (D) None of the above

- 5. Which of the following is a vector?
 - (A) Gravitational potential
 - (B) Potential difference
 - (C) Time
 - (D) None of the above
- 6. Which of the following are vector quantities?
 - (A) Number of students in class
 - (B) Velocity of a thrown base ball
 - (C) Mass of car
 - (D) None of the above
- 7. Pressure of an ideal gas is a-
 - (A) Scalar
 - (B) Vector
 - (C) Neither scalar nor vector
 - (D) Numerals
- 8. Stress is-
 - (A) Vector
- (B) Scalar
- (C) Tensor
- (D) None of the above
- Tensor of rank zero is called—
 - (A) Scalar
- (B) Vector
- (C) Numeral
- (D) None of the above

- 10. Geometrical method of addition of two vectors is called—
 - (A) Triangle method
 - (B) Parallelogram method
 - (C) Both
 - (D) None of the above
- 11. If $\overrightarrow{a} \cdot \overrightarrow{a} = a^2$, then $\overrightarrow{a} \times \overrightarrow{a}$ will be—
 - (A) Zero
- (B) √2*a*
- (C) a² sin θ
- (D) None of the above
- 12. A jet engine works on the principle of conservation of —
 - (A) Mass
 - (B) Energy
 - (C) Linear momentum
 - (D) Angular momentum
- A uniformly accelerating body experiences force—
 - (A) In opposite direction
 - (B) In the same direction of motion
 - (C) Perpendicular to the direction of motion
 - (D) None of the above
- 14. Newton's first law of motion provides the concept of —
 - (A) Energy
- (B) Work
- (C) Inertia
- (D) None of the above
- If the bucket is lowered with acceleration of 1.8 m/s² the reaction at the bottom will be—
 - (A) 160 N
- (B) 360 N
- (C) 170 N
- (D) None of the above
- Which of the following concept is independent of acceleration due to gravity?
 - (A) Surface tension
 - (B) Viscosity
 - (C) Archimede's principle
 - (D) Both A and B
- 17. A hole is drilled through the earth along a diameter and a stone is dropped into it. When the stone is at the centre of earth it has only-
 - (A) Mass
 - (B) Weight
 - (C) Acceleration
 - (D) None of the above

- 18. The law of conservation of linear momentum can be derived from-
 - (A) Newton's first law
 - (B) Newton's second law
 - (C) Newton's third law
 - (D) None of the above
- A soda water bottle falls under gravity. The gas bubble will—
 - (A) Move upward
 - (B) Move downward
 - (C) Remain stationary
 - (D) None of the above
- A spring balance is pulled at its both ends with a force of 10 kg weight. The reading of the balance will be—
 - (A) 10 kg wt
- (B) Zero
- (C) 20 kg wt
- (D) None of the above
- A body moves through a distance of 8 metres under the action of a force of 10 Newton. The gain in kinetic energy is—
 - (A) 80 J
- (B) 40 J
- (C) 120 J
- (D) None of the above
- 22. If a body moves on a circular path with uniform speed, the acceleration of the body —
 - (A) Remains constant
 - (B) Changes
 - (C) Acts away from the centre
 - (D) Is zero
- 23. Which of the following is a Psuedo force?
 - (A) Electromagnetic force
 - (B) Cohesive force
 - (C) Centripetal force
 - (D) Centrifugal force
- When milk is churned at high speed cream collects—
 - (A) Near the axis
 - (B) Away from the axis
 - (C) At the bottom of the vessel
 - (D) None of the above
- Strain rosetters are used to—
 - (A) Measure shear strain
 - (B) Measure linear strain
 - (C) Measure volumetric strain
 - (D) Relieve strain

26.	the 1		briskly	water is grasped by in a vertical circle ear the—
	(A)	Neck	(B)	Bottom
	(C)	In the middle	(D)	None of the above

- The angular speed of minute hand of watch
 - (A) $\frac{\pi}{1800}$ rad/sec (B) $\frac{\pi}{60}$ rad/sec
 - (C) $\frac{\pi}{3600}$ rad/sec (D) None of the above
- 28. In an amusing device Rotor, the weight of the person is supported by —
 - (A) Centripetal force
 - (B) Centrifugal force
 - (C) Frictional force
 - (D) None of the above
- When a cyclist moves on a curved path he—
 - (A) Remains vertical
 - (B) Bends inward
 - (C) Bends outward
 - (D) Becomes horizontal
- 30. A piece of stone is thrown with velocity v at an angle of 60° with the horizontal. The velocity at the highest point is—
 - (A) $\frac{v}{2}$
- (C) 2v
- (D) None of the above
- 31. The ratio of K.E. at the highest point to the initial K.E. in above problem is—
 - (A) $\frac{1}{2}$
- (C) $\frac{1}{3}$
- (D) None of the above
- A man can throw a ball upto a maximum height of x metres. The maximum distance he can throw the ball on the horizontal plane is—
 - (A) 2x metres
- (B) x metres
- (C) 3x metres
- (D) None of the above
- 33. A man can throw a ball upto a maximum distance x metres on a horizontal plane. The maximum height upto which he can throw the ball is—
 - (A) $\frac{x}{2}$ metres
- (B) x metres
- (C) 2x metres
- (D) None of the above

- 34. The maximum horizontal range of projectile is 4 km. If the projectile is thrown at an angle of 15° to the horizontal, its range will be—
 - (A) 2 km

is grasped by

vertical circle.

- (B) 1 km
- (C) $\frac{1}{2}$ km
- (D) None of the above
- Laws of limiting friction were first of all discovered by—
 - (A) Leonardo da Vinci
 - (B) Newton
 - (C) Laplace
 - (D) None of the above
- The static frictional force between two objects at rest w.r.t. one another is always—
 - (A) Less than maximum value
 - (B) Smaller than maximum value
 - (C) Equal to maximum value
 - (D) None of the above
- A person runs over ground. The nature of friction between his shoes and the ground is—
 - (A) Static
- (B) Kinetic
- (C) Rolling
- (D) None of the above
- If the normal force is doubled, the coefficient of friction is—
 - (A) Not changed
- (B) Halved
- (C) Doubled
- (D) Triple
- The limiting friction between two bodies in contact is independent of—
 - (A) Nature of the surface in contact
 - (B) The area of surface in contact
 - (C) Normal reaction between the surface
 - (D) None of the above
- 40. In an inelastic collision the quantity that remains conserved is —
 - (A) Linear momentum
 - (B) Kinetic energy
 - (C) Density
 - (D) None of the above
- 41. Two bodies of the same mass and speed travelling in opposite direction collide and stick together. The velocity of compound body is—
 - (A) ∞
- (B) Zero
- (C) 2v
- (D) None of the above

- In a perfectly elastic collision—
 - (A) Linear momentum and K.E. both are conserved
 - (B) Only momentum is conserved
 - (C) Only K.E. is conserved
 - (D) None of the above
- For perfectly inelastic collision
 - (A) e = 0
- (B) e = 1
- (C) e < 1</p>
- (D) None of the above
- For inelastic collision—
 - (A) e = 0
- (B) e < 1</p>
- (C) e = 1
- (D) None of the above
- For super elastic collision—
 - (A) e>1
- (B) e = 1
- (C) e < 1</p>
- (D) None of the above
- 46. When the physical and chemical nature of the bodies is changed by the collision, the event is known as—
 - (A) Reaction
- (B) Diffraction
- (C) Polarization
- (D) None of the above
- When two bodies come together and interact strongly for a short time, the event is known as-
 - (A) Collision
- (B) Reaction
- (C) Regelation
- (D) None of the above
- 48. If there is no change in momentum of a body then impulse of a force is—
 - (A) Zero
- (B) Infinite
- (C) Constant
- (D) None of the above
- For perfectly elastic collision—
 - (A) e = 1
- (B) e < 1</p>
- (C) e = 0
- (D) None of the above
- In explosive collision—
 - (A) K.E. increases (B) K.E. decreases
 - (C) K.E. constant
- (D) None of the above
- Collision in two dimensions is also known as-
 - (A) Oblique collision
 - (B) Straight collision
 - (C) Head on collision
 - (D) None of the above

- 52. The stress required to cause actual fracture of a material is called the —
 - (A) Tangential stress
 - (B) Normal stress
 - (C) Ultimate strength
 - (D) None of the above
- The shear modulus has a significance—
 - (A) For solid material
 - (B) For liquids only
 - (C) For gases only
 - (D) None of the above
- Compressibility of air is—
 - (A) Greater than that of water
 - (B) Less than water
 - (C) Equal to water
 - (D) None of the above
- 55. Which one of the following is more elastic?
 - (A) Rubber
- (B) Steel
- (C) Aluminium
- (D) Glass
- The P.E. per unit volume of stretched wire
 - (A) $\frac{1}{2}$ Stress × Strain (B) $\frac{\text{Stress}}{\text{Strain}}$
- 57. The change in the shape of a regular body is due to-
 - (A) Longitudinal strain
 - (B) Shearing strain
 - (C) Volume strain
 - (D) None of the above
- 58. The ratio of the adiabatic elasticity to the isothermal elasticity is-
 - (A) C_p/C_v
- (B) $C_v C_p$
- (C) $C_p C_v$
- (D) None of the above
- Which one of the following has the property of ductility —
 - (A) Gold
- (B) Glass
- (C) Air
- (D) Water
- 60. Which one of the following has the property of malleability?
 - (A) Copper
- (B) Glass
- (C) Oxygen
- (D) NaCl

34	Mech. Engg.						
61.	Which of the followi (A) NaCl (C) Copper	ng is brittle ? (B) Rubber (D) Steel	71.	(A)	.H.M.— Phase and epoch Phase is const	h both vary ant and epoch rema	ins
62.	A perfectly rigid bo modulus— (A) Zero (C) Infinite	dy has value of Young's (B) 1 (D) None of the above	72.	(D)	None of the abo	d phase remains const we nce between force a	
	Modulus of rigidity of (A) Zero (C) 1 Poisson's ratio of rea	(B) Infinite (D) None of the above		velo (A) (C)		(B) $\frac{\pi}{2}$ (D) None of the abo	ve
	(A) Zero (C) Positive	(B) Negative (D) None of the above	73.	disp	lacement is—	nce between force a	ind
65.	is— (A) Volume	nature of strain produced (B) Tensile	74	(A) (C)	π	(B) $\frac{\pi}{2}$ (D) None of the abo	
66.	(C) Shear In S.H.M. the am particle is determined (A) Frequency (C) Energy	(D) None of the above plitude of a vibrating d by— (B) Velocity (D) Wavelength	/4.	(A) (B) (C)	Square of ampli Amplitude Cube of amplitu None of the abo	ıde	J—
	S.H.M. is given by known as— (A) Angular velocity (B) Pulsatance (C) Angular speed (D) None of the above	ve	76.	P.E. (A) (C) Ene (A) (C)	curve in S.H.M. Straight line Ellipse rgy of an oscillati Mass (Amplitude) ²	is— (B) Parabola (D) Circle ion is proportional to (B) (Frequency) ² (D) All of the above	;
68.	(T being period of m (A) Minimum		77.	if— (A) (B)		ctor decreases	ase
69.	maximum acceleration the period of oscillation (A) 3.14 sec.		78.	(D) The inde (A)	None of the abo motion in whi pendent of ampli Isochronous	ve ich time period (T) itude is called— (B) Rotatory	
70.	_	on of particle in SHM	79.	A m How radii of th (A)	nan jumps 2 metr v high he will j	(D) None of the above on the surface of ear ump on a planet whenean density same as to (B) 400 metre (D) None of the abo	rth ose that
	(-, -	(-)		(-)	-	(-, -, -, -, -, -, -, -, -, -, -, -, -, -	

- 80. A satellite is moving in a circular orbit around the earth. It moves with—
 - (A) Constant speed
 - (B) Constant acceleration
 - (C) No force acting on it
 - (D) None of the above
- 81. The period of a satellite in a circular orbit around a planet is independent of—
 - (A) The mass of the planet
 - (B) The radius of the planet
 - (C) The mass of the satellite
 - (D) All these parameters
- Weightlessness in space is due to—
 - (A) Inertia
 - (B) Zero gravity
 - (C) Zero acceleration
 - (D) Centre of gravity
- 83. The Torque exerted by sun's gravitational force on a planet moving around it is—
 - (A) Zero
- (B) Infinite
- (C) 2 R
- (D) None of the above
- 84. The height at which g will be $\frac{1}{4}$ th of its value at the earth surface is -
 - (A) h = R
- (B) $h = \frac{R}{2}$
- (C) h = 2R
- (D) None of the above
- 85. A closed bottle filled with water at 0°C is taken to the suface of moon. If the bottle is opened, the water will-
 - (A) Cool down
- (B) Boil
- (C) No change
- (D) None of the above
- 86. T_1 is the time period of geostationary satellite and T₂ is the time period of rotation of the earth around its own axis. Then-
 - (A) $T_1 > T_2$
- (B) $T_1 = T_2$
- (C) $T_1 < T_2$
- (D) $T_1 = 2T_2$
- 87. A body of mass m is taken from the surface of the earth (radius R) to the height equal to R. The change in P.E.—
 - (A) $\frac{mgR}{2}$
- (B) mgR
- (C) $\frac{1}{4 mgR}$
- (D) None of the above

- 88. The time period of a satellite in a circular orbit of radius R is T. The time period of an other satellite moving in a orbit of radius 4R
 - (A) 4T
- (B) 8T
- (C) 2T
- (D) None of the above
- The tail of a comet is away from the sun due to—
 - (A) Radiation pressure of the sun
 - (B) Perihelion of the sun
 - (C) Nuclear fusion
 - (D) None of the above
- The force responsible for surface tension is—
 - (A) Gravitational force
 - (B) Nuclear force
 - (C) Vander Waal force
 - (D) None of the above
- Water falls in capillary tube instead of rising in capillary tube of which of the following material?
 - (A) Glass
- (B) Copper
- (C) Silver
- (D) Paraffin wax
- 92. The angle of contact for glass / mercury is-
 - (A) 90°
 - (B) Less than 90°
 - (C) Greater than 90°
 - (D) Zero
- A liquid which does not wet solid surface has angle of contact —
 - (A) Obtuse angle
 - (B) Acute angle
 - (C) Straight angle
 - (D) None of the above
- A liquid which wets a solid surface has angle of contact—
 - (A) Acute angle
- (B) Obtuse angle
- (C) Straight angle
- (D) None of the above
- 95. Addition of detergent to liquid-
 - (A) Lowers the S.T. (B) Increase the S.T.
 - (C) No effect
- (D) None of the above
- Cohesion is maximum in—
 - (A) Solids
- (B) Liquids
- (C) Gases
- (D) Same in all states

- If water is electrified its surface tension—
 - (A) Increases
- (B) Decreases
- (C) Unchanged
- (D) None of the above
- If inorganic salt is mixed in water, its surface tension —
 - (A) Decreases
- (B) Increases
- (C) Unchanged
- (D) None of the above
- If organic salt is mixed in water its S.T.—
 - (A) Increases
- (B) Decreases
- (C) Unchanged
- (D) None of the above
- 100. The Molecular range is of the order of—
 - (A) 10^{-8} m
- (B) 10^{-9} m
- (C) 10^{-7} cm
- (D) None of the above
- Displacement, velocity and acceleration of a particle are—
 - (A) All vector quantities
 - (B) All vector quantities except displacement
 - (C) All vector quantities except velocity
 - (D) All vector quantities except acceleration
- 102. When h = k, the time period of oscillation of compound pendulum is —
 - (A) Zero
- (B) 1 sec
- (C) Maximum
- (D) Minimum
- The minimum time period of oscillation of a compound pendulum is —
 - (A) $2\pi\sqrt{\frac{2k}{g}}$ (B) $2\pi\sqrt{\frac{h}{g}}$ (C) $2\pi\sqrt{\frac{k}{g}}$ (D) $2\pi\sqrt{\frac{k}{2g}}$
- 104. The number of instantaneous centres for 8-link kinematic chain is—
 - (A) 8
- (B) 16
- (C) 24
- (D) 28
- 105. A mechanism having n links with all binary pairs will have the number of instantaneous equal to -
 - (A) n(n-1)
- (B) $\frac{n(n-1)}{2}$
- (C) (2n-1)
- (D) 2n
- 106. A mechanism has 7 links with all binary pairs except one which is ternary pair. The number of instantaneous centres of rotation will be—

- (A) 13
- (B) 14
- (C) 21
- (D) 42
- Magnitude of the linear velocity of any point on the kinematic link relative to the other point in the same kinematic link is—
 - (A) Product of angular velocity of the link and square of distance between them
 - (B) Zero
 - (C) Product of angular velocity of the link and distance between them
 - (D) Product of square of angular velocity of the link and the distance between them
- In four bar mechanism the mechanical advantage is maximum when the velocity ratio is—
 - (A) Minimum
- (B) 1
- (C) Maximum
- (D) $\frac{1}{2}$
- The direction of linear velocity of any point on the kinematic link relative to any other point on the same kinematic link is—
 - (A) Parallel to the line joining the points
 - (B) Perpendicular to the line joining the two points
 - (C) Of no significance as relative velocity is zero between link relative to any other point on the same kinematic link
 - (D) Not predictable unless configuration is known
- 110. The power transmitted by belt-drive is designed on the basis of-
 - (A) Average angle of contact of the two pulleys
 - (B) Angle of contact of the larger pulley
 - (C) Angle of contact of the smaller pulley
 - (D) Angle of contact of the driver pulley whether smaller or larger
- The angular velocity of two pulleys connected by crossed belt or open belt, are —
 - (A) Directly proportional to square of their diameters
 - (B) Inversely proportional to square of their diameters
 - (C) Directly proportional to their diameters
 - (D) Inversely proportional to their diameters

- 112. If the initial tension in the belt is increased—
 - (A) The power transmitted may increase upto a limit and then decrease
 - (B) The power transmitted by the belt reduces
 - (C) The power transmitted by the belt increases
 - (D) The power transmitted by the belt remains same
- 113. Due to strain in the belt caused by stress up to elastic limit. The ratio of the angular velocity of driving pulley to angular velocity of driven pulley—
 - (A) Decreases
 - (B) Increases
 - (C) Remains same
 - (D) Increases up to a limit and then decreases
- 114. The V-belt sheaves of pulleys normally have a groove angle of-
 - (A) 20° to 30°
- (B) 34° to 38°
- (C) 40° to 44°
- (D) 55° to 60°
- 115. For constant velocity ratio positive drive with large centre distance between driver and driven shaft-
 - (A) Gear drive is used
 - (B) V-belt drive is used
 - (C) Flat belt drive is used
 - (D) Chain drive is used

Answers

1. (B)	2. (B)	3.(B)	4.(C)	5. (D)
6. (B)	7.(A)	8.(C)	9. (A)	10. (A)
11. (A)	12. (C)	13.(B)	14.(C)	15. (A)
16. (D)	17.(A)	18.(C)	19.(C)	20. (A)
21. (A)	22.(A)	23. (D)	24. (A)	25.(B)
26. (A)	27.(D)	28.(C)	29.(B)	30. (A)
31. (A)	32.(A)	33. (A)	34. (A)	35. (A)
36. (A)	37.(A)	38. (A)	39.(B)	40. (A)
41. (B)	42.(A)	43. (A)	44.(B)	45. (A)
46. (A)	47.(A)	48. (A)	49. (A)	50. (A)
51. (A)	52.(A)	53. (A)	54. (A)	55.(B)
56. (A)	57. (B)	58. (A)	59. (A)	60. (A)
61. (A)	62. (C)	63. (A)	64.(B)	65.(B)
66. (C)	67. (B)	68. (A)	69.(B)	70.(C)
71. (D)	72. (B)	73.(C)	74. (A)	75.(B)
76. (D)	77.(A)	78. (A)	79. (A)	80. (A)
81. (C)	82. (C)	83. (A)	84. (A)	85.(B)
86. (B)	87. (A)	88.(B)	89. (A)	90.(C)
91. (D)	92. (C)	93. (A)	94. (A)	95. (A)
96. (B)	97. (B)	98.(B)	99.(B)	100.(B)
101.(A)	102.(D)	103. (A)	104. (D)	105.(B)
106. (C)	107. (C)	108. (A)	109.(B)	110. (A)
111.(D)	112. (C)	113.(B)	114. (B)	115. (D)

Stress

The internal resistance of the material against deformation is known as stress.

$$\therefore \quad \sigma = \frac{P}{A}$$
Where, $\sigma = Stress$

P = Load

A = Area over which stress develops

Strain

The strain (e) is the deformation produced by stress. Various types of strain are:

- (1) **Tensile Strain**—A piece of material with uniform cross-section subjected to a uniform axial tensile stress, will increase its length from l to $(l + \delta l)$ and increment of length δl is the actual deformation of the material.
 - $\therefore \text{ Tensile Strain } = \frac{\delta l}{l}$
- (2) **Compressive Strain**—Under compressive forces, a similar piece of material would be reduced in length from l to $l \delta l$.
 - $\therefore \text{Compressive Strain } e = \frac{\delta l}{l}$
- (3) Shear Strain—In case of shearing load, a shear strain will be produced which is measured by the angle through which the body distorts.
- (4) Volumetric Strain—It is defined as the ratio between change in volume and original volume of the body and is denoted by e_v

$$e_{\nu} = \frac{\delta V}{V}$$

Hooke's Law

Robert Hooke discovered experimentally that within elastic limit stress varies directly as strain.

or,
$$\frac{Stress}{Strain} = a constant$$

This constant is termed as modulus of elasticity.

(1) Young's Modulus—It is the ratio between tensile stress and tensile strain or compressive stress and compressive strain. It is denoted by E. It is the same as modulus of elasticity:

$$E = \frac{\sigma}{e} \left[= \frac{\sigma_1}{e_1} = \frac{\sigma_c}{e_c} \right]$$

(2) Modulus of Rigidity—It is defined as the ratio of shear stress τ (tau) to shear strain and is denoted by C, N or G. It is also called shear modulus of elasticity.

$$\frac{\tau}{e_s} = C, N \text{ or } G$$

(3) Bulk or Volume Modulus of Elasticity —It may be defined as the ratio of normal stress (on each face of a solid cube) to volumetric strain and is denoted by the K.

$$\frac{\sigma_n}{e_n} = K$$

Poisson's Ratio

The ratio of lateral strain to linear strain is known as Poisson's ratio.

∴ Poisson's ratio (µ)

$$= \frac{\text{Lateral strain or transverse strain}}{\text{Linear or primary strain}}$$

$$= \frac{1}{1}$$

Where m is a constant and its value varies between 3 and 4 for different materials.

Principal Planes and Principal Stresses

A body may be subjected to stresses in one plane or in different planes. There are always three mutually perpendicular planes along which the stresses at a certain point (in a body) can be

resolved completely into stresses normal to these planes. These planes which pass through the point in such a manner that the resultant stress across them is totally a normal stress are known as 'Principal Planes' and normal stresses across these planes are termed as 'Principal Stress'. The plane carrying the maximum normal stress is called the 'Major Principal Plane' and the stress called the 'Major Principal Stress'. The plane carrying the minimum normal stress is known as 'Minor Principal Plane' and the plane carrying the normal stress is known as 'Minor Principal Stress'.

Mohr's Circle

A German scientist Otto Mohr devised a graphical method for finding out the normal and shear stresses on any interface of an element when it is subjected to two perpendicular stresses. This method is -

Let P_x and P_y are the principal stresses on two prinicipal planes. We want to find stresses on an inclined plane which is perpendicular to the plane of paper and is inclined at an angle θ to the plane P_x stress.

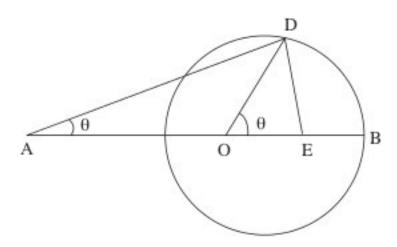


fig. P_x and P_y both tensile




fig. P_x tensile and P_y compressive $AC = P_y$ $AB = P_x$ and Taking, Bisect CB

Draw a circle with O as centre and OB or OC as radius. Draw a line OD at an angle of 20 to OB join AD.

$$\angle DAE = \phi$$
Tengential Stress
$$P_{t} = DE = OD \sin 2\theta$$

$$OB \sin 2\theta = \frac{P_{x} - P_{y}}{2} \sin 2\theta$$
Normal Stress $P_{n} = AE = AG + OE$

$$= \frac{P_{x} + P_{y}}{2} + OD \sin 2\theta$$

$$= \frac{P_{x} + P_{y}}{2} + \frac{P_{x} - P_{y}}{2} \cos \theta$$

Resultant Stress, $P_r = AD = \sqrt{P_n^2 + P_t^2}$

The maximum value of P_t is equal to the radius of the circle.

Moment of Inertia

Here

The Moment of Inertia of a rigid body about any axis is equal to product of its mass and square of its distance from axis of rotation.

The M.I. of a rigid body about a particular axis is defined by the equation

> $I = \sum m r^2 = MK^2$ M = Mass of the rigid body K = Radius of gyration

M. I. of some areas :

Shape	Moment of Inertia
(1) Rectangle	$l_{xx} = \frac{bd^3}{12}$, $l_{yy} = \frac{db^3}{12}$
(2) Triangle	$l_{xx} = \frac{bh^3}{36} \left(= \frac{bh^3}{12} \text{ about the base} \right)$
(3) Circle	$l_{xx} = l_{yy} = \frac{\pi r^4}{4}$
(4) Semi-circle	$l_{xx} = 0.11 \ r^4, l_{yy} = \frac{\pi r^4}{8}$
(5) Quarter circle	$l_{xx} = l_{yy} = 0.055 r^4$
(6) Ellipse	$l_{xx} = \frac{\pi a b^3}{4}$, $l_{yy} = \frac{\pi a^3 b}{4}$

Theorem of Parallel Axes (or Transfer Formula)—The moment of inertia of a lamina about any axis in the plane of the lamina equals the sum of moment of inertia about a parallel centroidal axis in the plane of lamina and the

product of the area of the lamina and square of the distance between the two axes.

$$l_{LM} = l_{xx} (or I_G) + Ah$$

Theorem of Perpendicular Axes—If Iax and Iay be the moment of inertia of a lamina about mutually perpendicular axes OX and OY in the plane of the lamina and I be the moment of inertia of the lamina about an axis normal to the lamina and passing through the point of intersection of the axes OX and OY, then

$$I = I_{ax} + I_{ay}$$

Lame's Theory

The assumptions made in Lame's theory are as fallows:

- The material is homogeneous and isotropic.
- Plane sections perpendicular to the longitudinal axis of the cylinder remain plane after the application of internal pressure.
- The material is stressed within the elastic limit.
- All the fibres of the material are to expand or contract independently without being constrained by the adjacent fibres.

Lame's equations are given by-

$$\sigma_{\rm r} = \frac{b}{r^2} - a$$

$$\sigma_{\rm c} = \frac{b}{r^2} + a$$

Springs

Springs are elastic members which distort under load and regain their original shape when load is removed. They are used in railway carriages, motor cars, scooters, motorcycles, rickshaws, governors etc. According to their uses, the springs perform the following functions:

- To absorb shock or impact loading as in carriage springs.
- To store energy as in clock springs.
- (iii) To apply forces to and to control motions as in brakes and clutches.
- (iv) To measure forces as in spring balances.
- To change the variations characteristic of a member as in flexible mounting of motors.

Column

A column is a long vertical slender bar or vertical member, subjected to an axial compressive load and fixed rigidly at both ends.

Strut

A strut is a slender bar or member in any position other than vertical, subjected to a compressive load and fixed rigidly or hinged or pin jointed at one or both the ends.

Slenderness Ratio (K)

It is the ratio of unsupported length of the column to the minimum radius of gyration of the cross-sectional ends of the column. It has no unit whatsoever.

Buckling Factor

It is the ratio between the equivalent length of the column to the minimum radius of gyration.

Buckling Load

The maximum limiting load at which the column tends to have lateral displacement or tends to buckle is called buckiling or crippling load.

Safe Load

It is the load to which a column is actually subjected to and is well below the buckling load. It is obtained by dividing the buckling load by a suitable factor of safety.

Safe Load =
$$\frac{\text{Buckling load}}{\text{Factor of safety}}$$

End Conditions

The end conditions of a load can be find in four ways:

- Both ends pin jointed or hinged or rounded or free.
- One end fixed and other end free.
- (iii) One end fixed and other pin jointed.
- (iv) Both ends fixed.

Equivalent Length

The distance between adjacent points of inflexion is called equivalent length or effective length or simple column length. A point of inflexion is found at every column end that is free

to rotate and at every point where there is a change of the axis.

S.N.	End condition	Equivalent length $l_{\rm e}$	Buckling load
1.	Both ends pin jointed	$l_{\rm e} = L$	$\frac{\pi^2 \operatorname{E} \operatorname{I}}{\operatorname{L}^2}$
2.	One end fixed and the other end pin jointed	$l_{\rm e} = \frac{\rm L}{\sqrt{2}}$	$\frac{2 \pi^2 E I}{L^2}$
3.	Both ends fixed	$l_{\rm e} = \frac{\rm L}{2}$	$\frac{4 \pi^2 E I}{L^2}$
4.	One end fixed and other end free	$l_{\rm e} = 2 \rm L$	$\frac{\pi^2 \operatorname{EI}}{4L^2}$

Formulae

 Relation between modulus of elasticity E and modulus of rigidity C i.e.,

$$C = \frac{m}{2(m+1)}E$$

$$m = Constant$$

and,

(2) Relation between modulus of elasticity E and Bulk modulus K

$$E = 3K \left(1 - \frac{2}{m} \right)$$

Relation between modulus of elasticity, modulus of rigidity and Bulk modulus

$$E = \frac{I K_c}{C + 3 K}$$

Euler's Formula (Long columns),

$$P = \frac{\pi^2 E l}{l_e^2}$$

(5) Rankine's formula—

$$P_{Rankine} = \frac{\sigma_c \times A}{1 + a(l_c / K)^2}$$

(6) Johnson's parabolic formula

$$\frac{P}{A} = \sigma_c - b \left(\frac{l}{K}\right)^2$$

Where,

$$b = \frac{\sigma_c^2}{4\pi^2 E}$$

End Conditions

- (i) One end fixed and other end free l_e = 2 l
- (ii) Both ends pin joined or hinged or rounded or free $l_e = l$
- (iii) One end fixed and other end jointed

$$l_{\rm e} = \frac{l}{\sqrt{2}}$$

(iv) Both ends fixed $l_e = \frac{\iota}{2}$

OBJECTIVE QUESTIONS

- The combined effect of external forces acting on a body is called—
 - (A) Stress
- (B) Strain
- (C) Load
- (D) None of the above
- load is one which is considered to act at a point.
 - (A) Triangular
 - (B) Uniformly distributed
 - (C) Point
 - (D) None of the above
- The internal resistance which the body offers to meet with the load or external force is called-
 - (A) Stress
 - (B) Strain
 - (C) Pressure
 - (D) None the above

- The unit of stress in S.I. unit is—
 - (A) MN/m²
- (B) KN/mm²
- (C) N/mm²
- (D) All the above
- represents the resistance developed by a unit area of cross-section.
 - (A) Unit stress
 - (B) Total stress
 - (C) Either of the above
 - (D) None of the above
- Total stress is expressed in-
 - (A) N
- (B) KN
- (C) MN
- (D) All the above
- Simple stress is often called—
 - (A) Direct stress
- (B) Transverse stress
- (C) Total stress
- (D) None of the above

 8. The deformation per unit length is called (A) Strain (B) Tensile stress (C) Compressive stress (D) Shear stress 9. If l and δl are the length and change in length respectively the strain is equal to— (A) δl/l (C) l × δl (D) None of the above 17. Maximum principal stress theory was postulated by— (A) St. Venant (B) Rankine (C) Mohr (D) Tresca (B) Mohr (C) Rankine (C) Rankine (D) Tresca (D) Tresca (D) Tresca (D) Tresca (E) Which of the following theories is suitable ductile material? (E) Maximum principal stress theory was postulated by— (E) Maximum principal stress theory was postulated by— (B) Mohr (C) Rankine (C) Rankine (D) Tresca (D) Tresca (D) Maximum principal stress theory was postulated by— (E) Rankine (C) Rankine (D) Tresca (D) Maximum principal stress theory was postulated by— (E) Maximum principal stress theory was postulated by— (E	
 (D) Shear stress 9. If l and δl are the length and change in length respectively the strain is equal to— (A) δl/l (B) δl/δl (C) l × δl (D) None of the above 10. The maximum stress in a ring under tension occurs— 18. Maximum shear stress theory was postul by— (A) St. Venant (B) Mohr (C) Rankine (D) Tresca 19. Which of the following theories is suitable ductile material? (A) Maximum principal stress theory 	postu-
 9. If l and δl are the length and change in length respectively the strain is equal to— (A) δl/l (B) δl/δl (C) l × δl (D) None of the above 10. The maximum stress in a ring under tension occurs— (A) Maximum shear stress theory was posture by— (A) St. Venant (B) Mohr (C) Rankine (D) Tresca 19. Which of the following theories is suitable ductile material? (A) Maximum shear stress theory was posture by— (A) St. Venant (B) Mohr (C) Rankine (D) Tresca 19. Which of the following theories is suitable ductile material? (A) Maximum principal stress theory 	
 (C) l×δl (D) None of the above 10. The maximum stress in a ring under tension occurs— 19. Which of the following theories is suitable ductile material? (A) Maximum principal stress theory 	stulated
 (C) l×δl (D) None of the above 10. The maximum stress in a ring under tension occurs— 19. Which of the following theories is suitable ductile material? (A) Maximum principal stress theory 	
10. The maximum stress in a ring under tension occurs— (A) Maximum principal stress theory	able for
(A) Along the line of action of load (B) Maximum principal strain theory	
(B) Perpendicular to the line of action of (C) Maximum shear stress theory load (D) None of the above.	
(C) At 45° with the line of action of load (D) None of the above 20 theory is suitable for brittle material	rial
(D) None of the above (A) Maximum strain energy	iai.
11. Which of the following statement is correct with reference to the curved beam theory? (B) Maximum shear stress theory	
(A) Shear stress is zero (C) Maximum principal stress theory	
(B) Hoop stress is zero (D) Distortion energy theory (C) Radial stress is zero 21. Efficiency of the welded joint is	41
(C) Radial stress is zero (D) Bending stress is zero 21. Efficiency of the welded joint is that of the riveted joint.	than
12. The nature of stress at the inside surface of a (A) Less (B) More	ahaya
crane hook is— (A) Shear (B) Tensile (C) Both (D) None of the above the properties of the properti	
(C) Compressive (D) None of the above has strength.	ou joint
13. For a crane hook the most suitable section (A) Lesser	
is— (B) Greater (A) Triangular (B) Trapezoidal (C) Either of the above	
(C) Circular (D) Rectangular (D) None of the above	
14. The neutral axis in curved beams— 23 is a process of joining two pieces	eces of
(A) Lies at the top of the beam metal by fusion—	
(B) Lies at the bottom of the beam (C) Coincides with the geometric axis (B) Welding	
(D) Does not coincide (C) Either of the above	
15. In curved beams the distribution of bending (D) None of the above	
stress is— (A) Linear (B) Parabolic 24. The diameter of the rivet (d) and thickne the plate (t) will follow the relation—	ness of
(C) Uniform (D) Hyperbolic (A) $d = 3\sqrt{t}$ (B) $d = 4\sqrt{t}$	
16. A thin flat ring is rotating at a speed v. The circumferential stress induced is given by— (C) $d = 5\sqrt{t}$ (D) $d = 6\sqrt{t}$	
(A) ρv_2 (B) ρv^2 25 rivetting is used in structural units.	s.
(C) $\frac{1}{2}\rho v^2$ (D) $\frac{1}{2}\rho v^3$ (A) Chain (B) Zig-zag (C) Diamond (D) None of the above (D)	above

- (A) Pitch
- (B) Back pitch
- (C) Gauge distance (D) None of the above
- The diameter of the cold rivet measured before driving is referred as—
 - (A) Nominal diameter
 - (B) Gross diameter
 - (C) Either of the above
 - (D) None of the above
- 28. In a thin shell circumferential stress (σ_c) is given by —
 - (A) $\sigma_c = \frac{Pd}{2tn_l}$ (B) $\sigma_c = \frac{Pd}{2tn_c}$ (C) $\sigma_c = \frac{Pd}{tn_l}$ (D) $\sigma_c = \frac{Pd^2}{tn_c}$
- Longitudinal stresses act to the longitudinal axis of the shell.
 - (A) Parallel
 - (B) Perpendicular
 - (C) Either of the above
 - (D) None of the above
- 30. Thin cylinder are frequently required to operate under pressures up to —
 - (A) 5 MN/m²
- (B) 15 MN/m²
- (C) 30 MN/m²
- (D) 250 MN/m²
- Which of the following is usually considered as thin cylinder?
 - (A) Boilers
- (B) Tanks
- (C) Steam pipes
- (D) All the above
- A shell with wall thickness small compared to internal diameter $\left(\frac{d}{t} \ge 20\right)$ is called
 - (A) Thin shell
 - (B) Thick shell
 - (C) Either of the above
 - (D) None of the above
- Vessels used for storing fluid under pressure are called
 - (A) Cylinders
- (B) Spheres
- (C) Shells
- (D) None of the above
- 34. Chemical vessels are made of which of the following materials?
 - (A) Non-ferrous materials
 - (B) Sheet metal

- (C) Cast iron
- (D) Special material
- Pressure vessels are made of—
 - (A) Cast iron
 - (B) Sheet steel
 - (C) Non-ferrous materials
 - (D) Any of the above
- Where are the steel bars in a concrete beam embedded?
 - (A) In the centre
 - (B) Near top section
 - (C) Near bottom section
 - (D) Uniformly
- Stress in a beam and the section modulus—
 - (A) Have curvilinear relation
 - (B) Are inversely proportional
 - (C) Are directly proportional
 - (D) Have unpredictable relationship
- 38. When a beam is loaded the horizontal or longitudinal shear should be accounted for materials like —
 - (A) Concrete
- (B) Wood
- (C) Cast iron
- (D) Lead
- Neutral plane of a beam—
 - (A) Passes through the c.g.
 - (B) Lies at bottom most fibre
 - (C) Is one whose length remains unchanged during the deformation
 - (D) None of the above
- When a rectangular beam is loaded transversely, the maximum compressive stress develops on —
 - (A) Neutral axis
- (B) Top fibre
- (C) Bottom fibre
- (D) Middle fibre
- 41. In case of a circular section the section modulus is given on—
 - (A) $\frac{\pi d^2}{}$ 16
- (B) $\frac{\pi d^3}{4\pi}$

- 42. The strength of the beam mainly depends on-
 - (A) Bending moment
 - (B) Centre of gravity of the section
 - (C) Section modulus
 - (D) Its weight

44	Mech. Engg.		
43.	A continuous beam is one which has— (A) Less than two supports (B) Two supports only	51.	When mild steel is subjected to tensile loading, its fracture will conform toshape.
	(C) More than two supports		(A) Granular (B) Cup and cone
	(D) None of the above		(C) Star (D) None of the above
11	In which of the following beam the supports	52.	The limiting load beyond which the material
	are not situated at the ends?		does not behave elastically is known as—
	(A) Cantilever beam		(A) Upper yield point (B) Maximum stress point
	(B) Simply supported beam		(C) Proportional limit
	(C) Over hanging beam		(D) Elastic limit
	(D) None of the above	53.	In which of the following terms stiffness is
45.	A cantilever is a beam whose—		expressed ?
	(A) One end is fixed and other free		(A) Impact strength
	(B) Both ends are fixed		(B) Modulus of elasticity
	(C) Both ends are free		(C) Hardness number
	(D) None of the above		(D) Mass density
46.	The moment of inertia of a rectangle about its XX-axis is given by—	54.	During tensile test, what does percentage elongation indicate?
	(A) $\frac{bd^3}{12}$ (B) $\frac{db^3}{12}$		(A) Malleability (B) Fatigue strength (C) Ductility (D) Creep
	(C) $\frac{d^3b}{\epsilon}$ (D) $\frac{bd^3}{\epsilon}$	55.	The value of Poisson's ratio depends upon -
	(C) 6 (D) 6		(A) Cross section
47.	The moment of inertia of a semicircle about		(B) Magnitude of load
	its XX-axis is—		(C) Material of test specimen
	(A) $0.22 r^3$ (B) $0.11 r^4$ (C) $0.14 r^4$ (D) $0.2 r^4$		(D) None of the above
		56.	has the highest value of Poisson's ratio-
48.	The moment of inertia of a quadrant about its XX-axis is given by—		(A) Concrete (B) Wood
	(A) $0.055 r^4$ (B) $0.04 r^4$		(C) Steel (D) Rubber
	(C) $0.06 r^4$ (D) r^4	57.	If a part is constrained to move and heated it
49.	The moment of inertia about a principal axis		will develop stress. (A) Shear (B) Tensile
	is called—		(C) Principal (D) Compressive
	(A) Mass moment of inertia	58	The impact strength of a material is an index
	(B) Second moment of inertia		of its—
	(C) Principal moment of inertia		(A) Hardness (B) Tensile strength
	(D) Any of the above		(C) Toughness (D) None of the above
50.	The impact strength of a material is an index of its—	59.	If the radius of a wire stretched by a load is doubled, then its Young's modulus will be—
	(A) Resistance to corrosion		(A) Halved
	(B) Hardness		(B) Doubled
	(C) Toughness		(C) Become one-fourth
	(D) None of the above		(D) Remain unaffected

60.	The material having same elastic properties in all directions are called material.	69. A measure of the strength economy of a material is the ratio between—
	(A) Elastic (B) Isotropic	(A) Working strength and density
	(C) Ideal (D) Uniform	(B) Ultimate strength and density
61.	strain is the deformation of the bar per	(C) Ultimate strength and safety
01.	unit length in the direction of the force.	(D) None of the above
	(A) Volumetric (B) Shear	70. The thermal stress in a bar is directly propor-
	(C) Lateral (D) Linear	tional to—
62.	The temperature strain in a bar is	(A) Its cross sectional area
	proportional to the change in temperature.	(B) Its volume
	(A) Directly	(C) The change in temperature
	(B) Indirectly	(D) None of the above
	(C) (A) or (B)	71. The stress produced by a suddenly applied
	(D) None of the above	load as compared to that produced by the
63.	Poisson's ratio for aluminium is-	same load when applied gradually is—
	(A) 0·13 (B) 0·23	(A) Double (B) Equal
	(C) 0·33 (D) 0·43	(C) Half (D) Four times
64.	The ratio of lateral strain to linear strain is	72. The value of Poisson's ratio depends on the—
	known as —	(A) Size of material
	(A) Modulus of elasticity	(B) Type of material
	(B) Modulus of rigidity	(C) Magnitude of load
	(C) Poisson's ratio	(D) Nature of load
	(D) Elastic limit	73. The principal stress are—
65.	To measure strain rosetters are used.	(A) Parallel to the principal planes
	(A) Linear (B) Shear	(B) Normal to the principal planes
	(C) Volumetric (D) None of the above	(C) Inclined to the principal planes
66.	When two equal and opposite forces applied	(D) None of the above
	to a body, tend to elongate it, the body is said	74. The point in a beam where the shear force is
	to be in—	zero, the value of bending moment at that
	(A) Compression (B) Tension	point is— (A) Maximum (B) Zero
	(C) Shear (D) Unpredictable	(C) Minimum (D) Infinite
67.	The strain produced due to shear force is	
	known as—	 75. The point of contraflexure occurs in— (A) Simply supported beams
	(A) Tensile strain	(B) Over hanging beam
	(B) Compressive strain	(C) Cantilevers
	(C) Shear strain	(D) All the above
	(D) Volumetric strain	76. In case of over hanging beam the point of
68.	Working stress is always—	contraflexure—
	(A) Less than ultimate stress	(A) Always lies within the supports
	(B) More than ultimate stress	(B) Always lies in the overhanging portion
	(C) Equal to ultimate stress	(C) Both
	(D) None of the above	(D) None of the above

- 77. A roller support has—
 - (A) Reaction in two directions
 - (B) Inclined reaction
 - (C) Reaction normal to the direction of motion
 - (D) None of the above
- 78. In S.I. system the unit of torque is—
 - (A) Kg.m
- (B) Kg/cm²
- (C) Newton metre (D) Dynes
- The type of stresses set up in a rotating shaft due to torsion are —
 - (A) Shear
- (B) Compressive
- (C) Bending
- (D) All the above
- 80. The intensity of shear stress in a shaft subjected to torsion is maximum at —
 - (A) Its axis
- (B) Its outer layer
- (C) Any layer
- (D) None of the above
- The most economical section of the shaft subjected to torsion is-
 - (A) Square section(B) Elliptical section
 - (C) Solid circular
- (D) Hollow circular
- The critical load of column is defined as the load at which column is in-
 - (A) Stable equilibrium
 - (B) Neutral equilibrium
 - (C) Unstable equilibrium
 - (D) None of the above
- 83. When a long column is subjected to a load more than critical, the column becomes—
 - (A) Unstable
- (B) Stable
- (C) Neutral
- (D) None of the above
- The ratio of length of strut and least radius of gyration is known as-
 - (A) Poisson's ratio(B) Slenderness ratio
 - (C) Factor of safety (D) None of the above
- The buckling load in case of struts is given by the relation —

- 86. The method of reducing the hoop stresses in cylinders is—
 - (A) To make its ends flat
 - (B) To shrink one cylinder over the other

- (C) Both (A) and (B)
- (D) None of the above
- 87. The loop stresses are acting across the—
 - (A) Circumferential section
 - (B) Longitudinal section
 - (C) Radial section
 - (D) None of the above
- The thickness of cylindrical shell is designed on the basis of —
 - (A) Diameter of the shell
 - (B) Length of the shell
 - (C) Loop stress
 - (D) None
- Thick cylinders are used to resist the pressure above —
 - (A) 100 Kg/cm²
- (B) 1000 Kg/cm²
- (C) 2500 Kg/cm²
- (D) None of the above
- The strength of welded joint is equal to—
 - (A) 0.5 af.
- (B) 0.9 af.
- (C) 0.7 af.
- (D) 0.0007 af.
- 91. The shearing strength of a rivet in double shear as compared to rivet in single shear is—
 - (A) 1.5 times
- (B) 1.8 times
- (C) Double
- (D) 1.2 times
- 92. The diameter of a hole drilled in a plate as compared to shank diameter of a rivet is—
 - (A) Less
- (B) More
- (C) Equal
- (D) None of the above
- A rivet joint may fail due to—
 - (A) Tearing of the plate
 - (B) Shearing of rivets
 - (C) Crushing of rivets
 - (D) Any one of the above
- 94. The efficiency of a single rivetted lap joint is—
 - (A) 30%
- (B) 40%
- (C) 55%
- (D) 80%
- 95. In a welded lap joint the throat thickness is equal to—
 - (A) 0·4 × Size of the weld
 - (B) 0.5 x Size of the weld
 - (C) $0.7 \times \text{Size of the weld}$
 - (D) None of the above

hoop stress is—

(A) 1

(C) $\frac{1}{2}$

(B) $\frac{1}{4}$

(D) 2

(D) Continuous beam only

moment of —

104. A simply supported beam of length 'L', cross

section 'A' carrying a uniformly distributed total load of 'W' will have maximum bending

- Rivets are generally specified by—
 - (A) Shape
- (B) Diameter of head
- (C) Over all length (D) Shank diameter
- 112. A column is known as short column if—
 - (A) Slenderness ratio is more than 120
 - (B) The slenderness ratio is more than 32
 - (C) The length is more than 30 times the diameter
 - (D) The length is less than 8 times the diameter
- 113. A column that fails primarily due to direct stress is called—
 - (A) Short column
- (B) Long column
- (C) Weak column
- (D) Medium column
- 114. The stiffness of a closely coiled spring of 'n' coils of wire of diameter 'd', spring radius 'R', is given by—
 - (A) $\frac{Cd^3}{R^2n}$
- (C) $\frac{Cd^4n}{32R^3}$
- A cylindrical section having no joint is known as-
 - (A) Jointless section (B) Seamless section
 - (C) Perfect section (D) Strong section

Answers

5. (A)

- 1. (C) 3. (A) 2. (C) 4. (D)
- 6. (D) 9. (A) 7.(A) 8. (A) 10. (A)
- 11. (C) 14.(C) 12. (B) 13.(B) 15. (D)
- 16. (B) 19.(C) 17. (B) 18. (D) 20.(C)
- 25.(C) 21. (B) 22. (B) 23.(B) 24. (D)
- 27.(A) 26. (B) 29. (A) 30.(C) 28. (A)
- 32.(A) 31. (D) 34. (D) 33.(C) 35. (D)
- 36. (C) 37. (B) 38.(B) 39.(C) 40.(B)
- 41. (C) 42. (C) 44.(C) 43.(C) 45. (A)
- 46. (A) 47. (B) 48. (A) 49.(C) 50.(C)
- 51. (B) 52.(D) 53.(B) 54.(C) 55.(C)
- 59. (D) 60. (A) 56. (D) 57.(D) 58.(C)
- 61. (D) 62.(A) 63.(C) 64.(C) 65. (A)
- 66. (B) 67. (C) 68. (A) 69.(C) 70.(C)
- 71. (A) 72. (B) 73.(B) 74. (A) 75.(B) 76. (A) 77. (C) 78.(C) 79. (A) 80.(B)
- 81. (D) 82. (B) 84.(B) 83. (A) 85. (A)
- 86. (B) 87. (B) 88.(C) 89.(C) 90.(C)
- 91.(B) 92. (B) 93. (D) 94.(C) 95.(C)
- 96. (A) 97. (B) 98. (D) 99.(B) 100.(B)
- 101. (C) 102. (B) 103.(C) 104. (B) 105. (D)
- 109.(B) 110.(C) 106. (C) 107. (B) 108. (A)
- 111. (D) 112. (D) 113. (A) 114. (D) 115. (D)

Properties of Fluid

- Hydraulics is that branch of Engineering which deals with water (at rest or in motion).
- (2) Fluid mechanics may be defined as that branch of Engineering which deals with the behaviour of fluid under the conditions of rest and motion.
- (3) A fluid is a substance which is capable of flowing.
- (4) Specific gravity is the ratio of the specific weight of the liquid to the specific weight of a standard fluid. It is dimensionless and has no units.
- (5) Viscosity is the property of a fluid which determines its resistance to shearing stresses.
- (6) Cohesion and Adhesion—Cohesion means intermolecular attraction between molecules of the same liquid.

Adhesion means attraction between the molecules of a liquid and the molecules of a solid boundary surface in contact with the liquid.

(7) Surface Tension (σ)—Surface tension is caused by the force of cohesion at the free surface. It is expressed in N/m.

Pressure inside:

- (i) Water droplet $P = \frac{4\sigma}{d}$
- (ii) Soap bubble $P = \frac{8\sigma}{d}$
- (iii) Liquid jet $P = \frac{2\sigma}{d}$

Where d stands for diameter.

Buoyancy and Floatation

The tendency for an immersed body to be lifted up in the fluid, due to an upward force opposite to action of gravity is known as buoyancy. The floating bodies may have the following types of equilibrium:

- (i) Stable equilibrium
- (ii) Unstable equilibrium
- (iii) Neutral equilibrium

Metacentre

The metacentre is defined as a point of intersection of the axis of body passing through c.g. (G) and original centre of buoyancy (B) and a vertical line passing through the centre of buoyancy (B₁) of the position of the body.

The distance between the centre of gravity (G) of a floating body and the metacentre (M) is called metacentric height.

Fluid Kinematics

Fluid kinematics is a branch of fluid mechanics which deals with the study of velocity and acceleration of the particles of fluids in motion and their distribution in space without considering any force or energy involved.

The motion of fluid particles may be described by the following methods.

- (1) Langrangian Method—In this method the observer concentrates on the movement of a single particle. The path taken by the particle and change in velocity and acceleration are studied.
- (2) Eulerian Method—In Eulerian method the observer concentrates on a point in the fluid system velocity, acceleration and other characteristics of the fluid at that particular point are studied.

Types of Fluid Flow

- Steady and unsteady flows.
- (ii) Uniform and non-uniform flows.
- (iii) One, two and three-dimensional flows.

- (iv) Rotational and irrotational flows.
- (v) Laminar and turbulent flows.
- (vi) Compressible and incompressible flows.

Types of Flow Lines

- (i) Path line—It is the path followed by a fluid particle in motion.
- (ii) Stream line—It is an imaginary line within the flow so that the tangent at any point on it indicates the velocity at that point.
- (iii) Stream tube—It is a fluid mass bounded by a group of streamlines.
- (iv) Streak line It is a curve which gives an instantaneous picture of the location of the fluid particles, which have passed through a given point.

Bernoulli's Theorem

According to this theorem "The total energy of a small amount of non-viscous and incompressible liquid flowing from one point to another, remains constant throughout the displacement". i.e.

$$P + \rho g h + \frac{1}{2} \rho v^2 = Constant$$

Stoke's law

When a bob (spherical ball) is dropped into a stationary liquid then it speeds up liquid in its contact, but remaining liquid remains at rest, which exerts an upward force called viscous drag. This force F depends upon the radius of the bob (r), coefficient of viscosity of liquid (η) and viscosity of bob relative to liquid (V).

$$\therefore \qquad F = 6 \pi \eta r V$$

This relation is known as Stoke's law.

Archimede's Principle

It states that when a body is fully or partially immersed in a fluid it is lifted up by a force which is equal to the weight of the fluid displaced.

Conditions of Equilibrium of Floating Bodies

- (i) Stable Equilibrium—If 'M' lies above Gi.e., BM > BG or MG > O.
- (ii) Unstable Equilibrium—If 'M' lies below G i.e., BM < BG or MG < O.

(iii) Neutral Equilibrium—The metacentre will coincide with the centre of gravity.

Reynolds Number

It is defined as the ratio of inertia force and viscous force of a flowing fluid. It is given by

$$R_e = \frac{\rho VL}{\mu} = \frac{VL}{\nu} = \frac{V \times d}{\nu}$$
 (for pipe flow)

Where V = Velocity of flow

d = Diameter of the pipe

and v =Kinematic viscosity of the fluid.

Flow Through Orifices and Mouthpieces

(1) An orifice is an opening in the wall or base of a vessel through which the fluid flows. The top edge of the orifice is always below the free surface.

A mouthpiece is an attachment in the form of a small tube or pipe fixed to the orifice (the length of pipe extension is usually 2 to 3 times the orifice diameter) and is used to increase the amount of discharge.

The velocity of jet of water from orifice is given as

$$V = \sqrt{2gH}$$

Notch and Weirs

A notch may be defined as an opening provided in the side of a tank or vessel such that the liquid surface in the tank is below the top edge of the opening.

A weir may be defined as any regular obstruction in an open stream over which the flow takes place.

Laminar Flow

Reynolds number

 $R_e < 2000 \dots Laminar flow$

Reynolds number

 $R_e > 4000 \dots Turbulent flow$

In case of Laminar flow -

The loss of head $\propto V$

Where V is the velocity of flow.

In case of Turbulent flow—The loss of head α

 V^2 (approx.) $\propto V^n$ (more exactly)

Where n varies from 1.75 to 2.0.

Flow in Open Channels

An open channel may be defined as a passage in which liquid flows with its upper surface exposed to atmosphere.

The flow in the open channel may be characterised as laminar or turbulent depending upon the value of Reynolds number.

When $R_e < 500$... flow is laminar When $R_e > 2000$... flow is turbulent

When $500 > R_e < 2000...$ flow is transitional

Hydraulic Turbines

A hydraulic turbines is a prime mover that uses the energy of flowing water and converts it into the mechanical energy (in the form of rotation of the runner).

Hydraulic Machines

(i) The Hydraulic accumulator is a device used to store the energy of fluid under pressure and make this energy available to hydraulic machines such as presses, lifts and cranes.

- (ii) A differential accumulator is a special type of accumulator that is used for storing energy at high pressure by comparatively small load on the ram.
- (iii) Hydraulic intensifier is a device which increases the intensity of pressure of a given liquid with the help of low pressure liquid of large quantity.
- (iv) Hydraulic press is a device used for lifting heavy loads by the application of much smaller force. It is based on Pascal's law.
- (v) Hydraulic crane is a device which is used for lifting heavy loads (upto 25 MN)
- (vi) Hydraulic lift is a device used for carrying persons and loads from one floor to another.
- (vii) Hydraulic ram is a device with which small quantities of water can be pumped to higher levels from the available large quantity of water of low head.

OBJECTIVE QUESTIONS

- The branch of engineering science, which deals with water at rest or in motion is called—
 - (A) Hydraulics
 - (B) Fluid mechanics
 - (C) Applied mechanics
 - (D) Kinematics
- 2. A solid can resist which of the following stresses?
 - (A) Tensile
- (B) Compressive
- (C) Shear
- (D) All the above
- possesses no definite volume and is compressible.
 - (A) Solid
- (B) Liquid
- (C) Gas
- (D) Vapour
- 4. A real practical fluid possesses which of the following?
 - (A) Viscosity
 - (B) Surface tension
 - (C) Density
 - (D) All of the above

- The ratio of the specific weight of the liquid to the specific weight of a standard fluid is known as—
 - (A) Specific volume (B) Weight density
 - (C) Specific gravity (D) Viscosity
- The property of a fluid which determines its resistance to shearing stresses is called—
 - (A) Viscosity
- (B) Surface tension
- (C) Compressibility (D) None of the above
- Newton's law of viscosity is given by the relation—
 - (A) $\tau = \mu^2 \frac{du}{dv}$
- (B) $\tau = \sqrt{\mu} \frac{du}{dv}$
- (C) $\tau = \mu \frac{du}{dv}$
- (D) $\tau = \mu^{3/2} \frac{du}{dv}$
- Fluids which do not follow the linear relationship between shear stress and rate of deformation are termed as fluids.
 - (A) Newtonian
 - (B) Non-Newtonian
 - (C) Dialent
 - (D) Ideal

- The printer's ink is an example of—
 - (A) Newtonian fluid
 - (B) Non-Newtonian fluid
 - (C) Thyxotropic substance
 - (D) Elastic solid
- The viscosity of liquids with increase in temperature —
 - (A) Decreases
 - (B) Increases
 - (C) Both (A) and (B)
 - (D) None of the above
- Surface tension is caused by the force of at the free surface.
 - (A) Cohesion
- (B) Adhesion
- (C) Both
- (D) None of the above
- 12. Which of the following is an example of phenomenon of surface tension?
 - (A) Rain drops
 - (B) Rise of sap in a tree
 - (C) Break up of liquid jets
 - (D) All of the above
- Surface tension is expressed in—
 - (A) N/m
- (B) N/m²
- (C) N²/m
- (D) N/m³
- Pressure inside a water droplet is given by the relation —
 - (A) $P = \frac{4\sigma}{d}$ (B) $P = \frac{3\sigma}{d}$

 - (C) $P = \frac{8\sigma}{d}$ (D) $P = \frac{16\sigma}{d}$
- is a phenomenon by which a liquid rises into a thin glass tube above or below its general level.

 - (A) Surface tension (B) Capillarity
 - (C) Cohesion
- (D) Adhesion
- The capillary rise of water in the glass tube is given by —
 - (A) $h = \frac{2\sigma}{w d}$
- (B) $h = \frac{3\sigma}{w d}$
- (C) $h = \frac{4\sigma}{w d}$
- (D) $h = \frac{6\sigma}{w d}$
- The force per unit area is called—
 - (A) Pressure
- (B) Strain
- (C) Surface tension (D) None of the above
- 18. The pressure of a liquid on a surface will always act to the surface.

- (A) Parallel
- (B) Normal
- (C) 45°
- (D) 60°
- The pressure as the depth of the liquid increases.
 - (A) Increases
 - (B) Decreases
 - (C) Remains unchanged
 - (D) None
- The intensity of pressure in a liquid due to its depth will vary with depth.
 - (A) Directly
- (B) Indirectly
- (C) Both
- (D) None of the above
- The height of the free surface above any point is known as—
 - (A) Static head
 - (B) Intensity of pressure
 - (C) Both (A) and (B)
 - (D) None of the above
- 22. The term fluid is applied to substances which—
 - (A) Offer no resistance to change of shape
 - (B) Offer resistance to change of shape
 - (C) Offer least resistance to compression
 - (D) None of the above
- The pressure of a fluid on a surface act—
 - (A) Normal to the surface
 - (B) Normal to the sphere
 - (C) Parallel to the surface
 - (D) None of the above
- Poise is a unit of—
 - (A) Surface tension (B) Viscosity
 - (C) Specific weight (D) Pressure
- The intensity of pressure at a depth h is equal
 - (A) Specific weight × Depth
 - (B) Specific volume × Depth
 - (C) Density × Depth
 - (D) Force × Depth
- 26. The resultant pressure (P) of the liquid on a immersed surface will act at -
 - (A) A point of centre of gravity
 - (B) The lower edge of the surface
 - (C) The upper edge of the surface
 - (D) None of the above

- 27. The depth of the centre of pressure (h) is 36. A differential manometer is used to measure given by relation—

- (A) $h = I_0 A \overline{x}$ (B) $h = \frac{I_0}{A \overline{x}}$ (C) $h = \frac{I_0 \overline{x}}{A}$ (D) $h = \frac{I_0 A}{\overline{x}}$
- The pressure of fluid can be measured by a—
 - (A) Barometer
- (B) Manometer
- (C) Piezometer tube (D) All of the above
- 29. The point of application of buoyant force is known as —
 - (A) Centre of pressure
 - (B) Centre of buoyancy
 - (C) Centre of gravity
 - (D) None of the above
- The body is said to be floating when—
 - (A) $W > F_b$
- (B) $W = F_h$
- (C) W < F_b
- (D) None of these
- 31. According to principle of floatation the weight of liquid displaced as compared to the weight of the body is-
 - (A) More
- (B) Less
- (C) Same
- (D) None of the above
- 32. The stability of a floating body depends upon —
 - (A) Its volume
 - (B) Its weight
 - (C) Its metacentric height
 - (D) The specific weight of fluid
- The metacentric height of sailing ships is—
 - (A) 0.45 m to 1.25 m
 - (B) 1.5 m to 3.5 m
 - (C) 0.25 m to 0.35 m
 - (D) 5 m to 7.5 m
- The metacentric height of battle ships is—
 - (A) 0.3 m to 0.8 m (B) 1.0 m to 1.5 m
 - (C) 2.5 m to 3.5 m (D) 5.0 m to 6.0 m
- A manometer is used to measure—
 - (A) Velocity of flow in channel
 - (B) Atmospheric pressure
 - (C) Pressure in pipes
 - (D) None of the above

- - (A) Difference of pressure at two sections of a pipe
 - (B) Atmospheric pressure
 - (C) Absolute pressure
 - (D) Velocity of fluid in pipes
- A small hole in the side or base of a tank is termed as—
 - (A) Notch
- (B) Orifice
- (C) Mouthpiece
- (D) Downed orifice
- A venturimeter is used to measure discharge through—
 - (A) A pipe
- (B) An open channel
- (C) A weir
- (D) Notch
- The diameter of throat of a venturimeter as compared to inlet diameter is generally —
 - (A) Half
- (B) One fourth
- (C) Double
- (D) One eighth
- 40. In order to avoid separation in venturimeter the angle of divergence is kept-
 - (A) 10° to 15°
 (B) 15° to 20°

 - (C) 5° to 7° (D) 7° to 10°
- The discharge through a pipe can be measured with—
 - (A) A venturimeter (B) An orificameter
- - (C) A flow nozzle (D) All of the above
- 42. The loss of head due to sudden contraction is equal to—
 - (A) $0.75 \frac{v^2}{2g}$ (B) $0.75 \frac{v^2}{4g}$

 - (C) $1.5 \frac{v^2}{g}$ (D) $0.25 \frac{v^2}{2g}$
- 43. The length of mouthpiece as compared to diameter is—
 - (A) 5 to 6 times
- (B) 6 to 8 times
- (C) 2 to 3 times
- (D) 1 to 1.5 times
- 44. The angle of contact (θ) between mercury and glass tube in case of capillary depression is -
 - (A) 5°
- (B) 15°
- (C) 95°
- (D) 128°

54 | Mech. Engg. 45. The reciprocal of Euler's number is known 54. The kinematic viscosity 'ε' is given by the relation as— (A) Mach's number (A) $\varepsilon = \frac{\eta}{\rho}$ (B) $\varepsilon = \eta \rho$ (B) Newton's number (C) Weber's number (C) $\varepsilon = \frac{\rho}{\eta}$ (D) $\varepsilon = \rho + \eta$ (D) Froude's number 46. The Reynolds number for laminar flow in The motion of whirlpool in a river is circular pipes is less than— (A) Rectilinear (B) Radial (A) 5000 (B) 3000 (C) Forced vortex (D) Free vortex (C) 2000 (D) 8000 56. In a stream line flow the component of The frictional resistance is independent of viscosity at right angle to the streamline is-(A) Velocity of flow (A) Maximum (B) Minimum (B) Temperature of fluid (D) Unpredictable (C) Zero (C) Pressure of flow 57. If the flow parameters change with time it is (D) Area of surface in contact known as — 48. The frictional resistance in case of turbulent (A) Uniform flow flow is independent of— (B) Unsteady flow (A) Area of surface in contact (C) Steady flow (B) Density of fluid (D) None of the above (C) Temperature of fluid (D) Pressure of flow The coefficient of friction in terms of Reynolds number is equal to— 49. The head lost due to turbulent flow as (A) $\frac{16}{R_e}$ compared to head lost in laminar flow is-(A) 100 times (B) 200 times (D) 480 times (C) 320 times According to Nikuradse's the boundary be-If a thin plate is held parallel to a fluid stream, haves hydrodynamically smooth whenthe pressure drag on it is— (A) $\frac{k}{\delta} > 10$ (B) $\frac{k}{\delta} > 0.25$ (A) Maximum (B) Minimum (C) Zero (D) None of the above (C) $\frac{k}{\delta} < 0.25$ (D) $\frac{k}{\delta} < 8$ 60. If a thin plate is held normal to the flow, the viscous drag on it is-51. The value of critical velocity is governed by (A) Maximum (B) Minimum (D) None of the above (A) Inertia force (C) Zero (B) Viscous force The total drag on a plate held normal to the (C) Ratio of inertia force and viscous force flow is equal to— (D) None of the above (A) Pressure drag (B) Viscous drag Viscous drag 52. The lower critical Reynolds number is (D) None of the above approximately equal to -Pressure drag (A) 100 (B) 200 62. The coefficient of drag and lift are functions (C) 1000 (D) 2000 of— (A) Frouds number 53. The head loss due to turbulent flow as compared to laminar flow is -(B) Reynolds number (C) Weber number (A) Less (B) More (D) Unpredictable (D) Euler number (C) Equal

- 63. The line joining the leading and trailing of the airfoil is known as—
 - (A) Profile centre line
 - (B) Chord line
 - (C) Camber line
 - (D) Curvature line
- The aspect ratio of a wing is expressed as—
 - (A) $\frac{l}{A}$
- (C) $\frac{l}{A^2}$
- (D) $\frac{l^2}{\Delta^2}$

l = Span, A = Area

- The coefficient of lift at stall point is—
 - (A) Maximum
- (B) Minimum
- (C) Zero
- (D) Average
- 66. The maximum velocity of an airplane in steady level flight will occur at an angle of attack of —
 - (A) 20.5°
- (B) 18·5°
- (C) 22.5°
- (D) 26.5°
- The weir with thick crest is known as—
 - (A) Drowned weir
 - (B) Broad crested weir
 - (C) Suppressed weir
 - (D) Cippoletti weir
- The cross section of cippoletti weir is—
 - (A) Rectangular
- (B) Triangular
- (C) Trapezoidal
- (D) None of the above
- The critical depth of a channel is expressed as-
 - (A) $h_c = \frac{V}{g}$ (B) $h_c = \frac{V^2}{g}$

 - (C) $h_c = \frac{V^2}{2g}$ (D) None of the above
- The critical depth of a channel is equal to—
 - (A) $\frac{1}{2}E_{\min}$ (B) $\frac{2}{3}E_{\min}$
- - (C) $\frac{3}{2}$ E_{min}
- (D) $\frac{1}{4}E_{\min}$
- The velocity for which the specific energy is minimum is known as—
 - (A) Maximum velocity
 - (B) Minimum velocity
 - (C) Critical velocity
 - (D) Average velocity

- 72. The condition for a tranquil flow in a channel
 - (A) $h > \frac{v^2}{g}$ (B) $h = \frac{v^2}{g}$
 - (C) $h < \frac{v^2}{a}$
- (D) None of the above
- Hydraulic jump is a phenomenon occurring in –
 - (A) A pipe
 - (B) A closed channel
 - (C) An open channel
 - (D) None of the above
- The wave produced due to surface tension in a shallow channel is known as-
 - (A) Gravity wave
- (B) Capillary wave
- (C) Elastic wave
- (D) None of the above
- In case of depressed nappe the pressure of air below the nappe is—
 - (A) Less than atmospheric
 - (B) More than atmospheric
 - (C) Equal to atmospheric
 - (D) None of the above
- 76. When there is no air left below the nappe, it is known as —
 - (A) Free nappe
- (B) Depressed nappe
- (C) Adhering nappe (D) All of the above
- The hydraulic accumulator is fitted—
 - (A) In between the pump and machine
 - (B) Before the pump
 - (C) After the machine
 - (D) Cannot be fitted anywhere
- The intensifier can raise the pressure of water upto —
 - (A) 100 kg/cm²
- (B) 560 kg/cm²
- (C) 950 kg/cm²
- (D) 1600 kg/cm²
- The pressure of water in a pelton wheel is—
 - (A) Less than atmosphere
 - (B) More than atmosphere
 - (C) Equal to atmosphere
 - (D) None of the above
- 80. Which one is an impulse turbine?
 - (A) Kaplan turbine (B) Francis turbine
 - (C) Pelton wheel
- (D) Fourneyron

- Pelton wheel is a—
 - (A) Tangential flow turbine
 - (B) Radial flow turbine
 - (C) Axial flow turbine
 - (D) None of the above
- 82. Which one of the following is an axial flow turbine?
 - (A) Pelton wheel
- (B) Francis turbine
- (C) Kaplan turbine (D) None of the above
- The type of turbine recommended for a head of 10 metre is—
 - (A) Francis turbine (B) Kaplan
 - (C) Pelton wheel
- (D) None
- A Girard turbine is—
 - (A) An axial flow reaction turbine
 - (B) An axial flow impulse turbine
 - (C) An inward flow reaction turbine
 - (D) None of the above
- 85. In case of reaction turbine—
 - (A) $P_1 = P_2$
- (B) $P_1 > P_2$
- (C) $P_1 < P_2$
- (D) None of the above
- The Banki turbine is generally employed for a head upto —
 - (A) 100 m
- (B) 500 m
- (C) 20 m
- (D) 600 m
- 87. In a reciprocating pump the accelerating head is maximum at the -
 - (A) Beginning of stroke
 - (B) End of stroke
 - (C) Mid of stroke
 - (D) None of the above
- 88. A single impeller pump deliver the discharge against a maximum head of—
 - (A) 10 m
- (B) 100 m
- (C) 200 m
- (D) 500 m
- The no. of blades in a Kaplan turbine are—
 - (A) 4-6
- (B) 10 − 12
- (C) 20 24
- (D) 25 30
- The unit speed of a turbine is equal to—
 - (A) $\frac{N}{\sqrt{H}}$
- (B) N√H

- The unit power of a turbine is equal to—
 - $(A) \frac{P}{H^{5/2}}$
- $(B) \frac{P}{H^{1/2}}$
- (C) $\frac{P}{H^{3/2}}$
- (D) $\frac{P}{H^{2/5+1/2}}$
- The head of water required for pelton wheel
 - (A) Low
 - (B) Medium
 - (C) High
 - (D) None of the above
- 93. The overall efficiency of pelton wheel is about —
 - (A) 55%
- (B) 65%
- (C) 85%
- (D) 99%
- 94. The function of a hydraulic turbine is to convert water energy into -
 - (A) Heat energy
 - (B) Electrical energy
 - (C) Machanical energy
 - (D) Atomic energy
- The suction pressure in a reciprocating pump, to avoid separation must not exceed—
 - (A) 2.6 m of water
 - (B) 7.7 m of water
 - (C) 10 m of water
 - (D) 3 m of water
- A pitot tube is used to measure—
 - (A) Discharge through a pipe
 - (B) Velocity of flow
 - (C) Specific gravity
 - (D) Viscosity
- 97. The hydraulic mean depth for a rectangular section is —
 - (A) $\frac{bd}{2d+b}$

- The hydraulic mean depth for a pipe running full of water is equal to -
 - (A) $\frac{d}{2}$
- (B) $\frac{d}{4}$
- (C) 2d
- (D) 2πd

- 99. The thickness of the boundary layer at the leading edge of the body is—
 - (A) Maximum
- (B) Minimum
- (C) Average
- (D) None of the above 106.
- The flow within the boundary layer is—
 - (A) Only laminar
 - (B) Only turbulent
 - (C) Either laminar or turbulent
 - (D) None of the above
- Load factor is equal to—
 - Peak load in a certain period Average load during that period
 - Average load over a certain period Plant installed capacity
 - Average load over a certain period Maximum load occuring during the same period
 - Average plant capacity utilization Actual load or plant during that period
- Hydraulic jump is used for
 - (A) Reducing the flow rate
 - (B) Reducing the energy of flow
 - (C) Increasing the flow rate
 - (D) Reducing the velocity of flow
- Hydraulic jump occurs when—
 - (A) Flow is sub-critical
 - (B) Flow is supercritical
 - (C) Flow is supercritical and adequate downstream depth is available
 - (D) Adequate downstream depth is available
- 104. The column or slenderness ratio of buttress is given by —
 - Height of buttress Spacing of buttress
 - Height of buttress (B) Thickness of buttress
 - Height of buttress Width of buttress
 - Height of buttress Massiveness factor
- Inertia force Pressure force is known as—
 - (A) Weber's number
 - (B) Mach number

- (C) Euler's number
- (D) Prandtl number
- Inertia force is known as—
 - (A) Nusselt number
 - (B) Mach number
 - (C) Reynolds number
 - (D) Froude number
- Best section for open channel flow is—
 - (A) Semi-circle
 - (B) Triangular
 - (C) Rectangular
 - (D) Trapezoidal
- 108. Which fluid is the heaviest?
 - (A) Castor oil
 - (B) Air
 - (C) Carbon tetrachloride
 - (D) Glycerine
- 109. A rotameter should always be installed in—
 - (A) Inclined at 45° to vertical
 - (B) Vertical position
 - (C) Inclined at 30° to vertical
 - (D) Horizontal position
- 110. In a flow field, at the stagnation point—
 - (A) Total energy is zero
 - (B) Pressure is zero
 - (C) All the velocity head is converted into pressure head
 - (D) Pressure head is equal to velocity head
- 111. Notch is a device used for measuring—
 - (A) Velocity through a small channel
 - (B) Rate of flow through pipe
 - (C) Rate of flow through a small channel
 - (D) Velocity through a pipe
- Submerged weight of a body is—
 - (A) Less than its weight in air
 - (B) Greater than its weight in air
 - (C) Greater than its weight in vacuum
 - (D) Equal to its weight in air
- 113. The flow between any two stream lines—
 - (A) Remains the same
 - (B) Is always zero
 - (C) Increase along its path
 - (D) Decreases along its path

114. Which two forces are			31. (C)	32. (C)	33. (A)	34.(B)	35.(C)
laminar flow between clos		plates ?	36. (A)	37. (B)	38. (A)	39. (A)	40.(C)
(A) Viscous and pressure			41. (D)	42.(A)	43.(C)	44. (D)	45.(B)
(B) Gravity and pressure			46. (C)	47. (C)	48. (D)	49.(C)	50.(C)
(C) Inertial and viscous				52.(D)	53.(B)	54. (A)	55. (D)
(D) Pressure and inertial			51. (C)				
115. A draft tube converts—			56. (C)	57. (B)	58. (A)	59. (C)	60.(C)
(A) Kinetic energy into n	nechanical e	energy	61. (A)	62. (B)	63.(B)	64.(B)	65. (A)
(B) Potential head into pr	essure head	1	66. (A)	67. (B)	68.(C)	69.(B)	70.(B)
(C) Velocity head into pr	essure head	l	71. (C)	72. (B)	73.(C)	74.(B)	75. (A)
(D) Pressure energy into	kinetic ener	rgy	76. (C)	77.(A)	78. (D)	79.(C)	80.(C)
Answer	S		81. (A)	82. (C)	83.(B)	84. (A)	85.(B)
1.(A) 2.(D) 3.(C)	4. (D)	5.(C)	86. (C)	87. (C)	88.(B)	89. (A)	90. (A)
6. (A) 7. (C) 8. (B)	9. (C)	10. (A)	91. (C)	92. (C)	93.(C)	94.(C)	95.(B)
11. (A) 12. (D) 13. (A)	14. (A)	15.(B)	96. (B)	97.(A)	98.(B)	99.(B)	100.(C)
16. (C) 17. (A) 18. (B)	19. (A)	20. (A)	101. (C)	102. (B)	103.(C)	104.(B)	105.(C)
21.(A) 22.(A) 23.(A)	24.(B)	25. (A)	106. (D)	107.(A)	108.(C)	109.(B)	110.(C)
26. (D) 27. (B) 28. (D)	29.(B)	30.(C)	111. (C)	112.(A)	113. (A)	114. (A)	115. (A)

INTERNAL COMBUSTION ENGINE

Heat Engine

Heat engine is a device which converts the heat energy possessed by the fuel (coal,oil or gas) into mechanical energy.

Heat engines may be classified into two main classes as follows:

- (A) External combustion engines [Steam engine]
- (B) Internal combustion engines [Petrol engine, diesel engine]

External Combustion Engine

The engine in which the combustion of the fuel takes place outside the engine cylinder and the heat energy obtained from the combustion of the fuel is converted into mechanical energy inside the engine cylinder, *i.e.* steam engine.

There are several disadvantages in steam engine like—

- (a) They have low efficiency
- (b) They require more space
- (c) They require more time for starting
- (d) They work on low pressure and temperature.

Internal Combustion Engine

The heat engine in which the combustion of the fuel takes place inside the engine cylinder and the heat energy obtained from the combustion of the fuel is converted into mechanical work. i.e., petrol engine, diesel engine and gas engine.

There are several advantages over steam engine as under:

- (a) They have high efficiency.
- (b) They require less space or they are compact.
- (c) They require less time for starting.
- (d) They work on high pressure and temperature.

Classification of Internal Combustion Engine

The I.C. engine can be classified on the basis of—

- (A) Types of the fuel used
 - Petrol or gasolene engine
 - (ii) Diesel engine
 - (iii) Gas engine
- (B) Number of Strokes per cycle of working
 - (i) Four stroke cycle engine
 - (ii) Two stroke cycle engine
- (C) Types of ignition used for the combustion of the fuel
 - (i) Spark ignition engine
 - (ii) Compression ignition engine
 - (iii) Hot spot ignition engine
- (D) Cycle of operations
 - Otto cycle engine
 - (ii) Diesel cycle engine
 - (iii) Dual combustion cycle engine
- (E) Speed of the engine
 - (i) Slow speed engine
 - (ii) Medium speed engine
 - (iii) High speed engine
- (F) Method of fuel supply
 - (i) Carburettor engine
 - (ii) Air injection engine
 - (iii) Airless or solid injection engine
- (G) Type of cooling system adopted
 - Air cooled engine
 - (ii) Water cooled engine
 - (iii) Evaporative cooling type engine

- 60 | Mech. Engg.
- (H) Location of valves
 - Over head valve engine
 - (ii) Side valve engine
- (I) Arrangement of cylinder
 - Horizontal engine
 - (ii) Vertical engine
 - (iii) Inclined engine
 - (iv) Radial engine
 - (v) V-engine
 - (vi) Opposed piston engine
 - (vii) Opposed cylinder engine
- (J) The number of working cylinders
 - (i) Single cylinder engine
 - (ii) Multicylinder engine
- (K) The applications
 - (i) Stationary engine
 - (ii) Automotive engine
 - (iii) Marine engine
 - (iv) Air-craft engine
 - (v) Locomotive engine
- (L) Methods of Governing
 - (i) Hit and miss governed engine
 - (ii) Qualitatively governed engine
 - (iii) Quantitavely governed engine
- (M) Miscellaneous types
 - (i) Free piston engine
 - (ii) Wankel engine
 - (iii) Gas turbine
 - (iv) Sterling engine

Application of I.C. Engines

The I.C. engines are generally used for—

- (i) Road vehicles
- (ii) Air crafts
- (iii) Locomotives
- (iv) Construction-in-civil engineering equipment such as bulldozer, scraper, power shovels
- (v) Pumping sets
- (vi) Cinemas
- (vii) Hospitals
- (viii) Several industrial applications

Different Parts of I.C. Engines

- (A) Parts common to both petrol and diesel engines
 - (i) Cylinder
 - (ii) Cylinder head
 - (iii) Piston
 - (iv) Piston rings
 - (v) Gudgeon pin
 - (vi) Connecting rod
 - (vii) Crank shaft
 - (viii) Crank
 - (ix) Engine bearing
 - (x) Crank case
 - (xi) Fly wheel
 - (xii) Governor
 - (xiii) Valves and valve operating machines
- (B) Parts of petrol engine
 - (i) Spark plug
 - (ii) Carburettor
 - (iii) Fuel pump
- (C) Parts of diesel engine
 - (i) Fuel pump
 - (ii) Injector

Major Terms connected with I.C. Engine

- (i) Bore—The inside diameter of the cylinder is called bore.
- (ii) Stroke—The linear distance along the cylindrical axis between two limiting positions is called stroke.
- (iii) Top dead centre (T.D.C.)—The top most position of the piston towards cover end side of the cylinder is called top dead centre.
- (iv) Bottom dead centre (B.D.C.)—The lowest position of the piston towards the crank and side of the cylinder is called bottom dead centre.
- (v) Clearance volume—The volume contained in the cylinder above the top of the piston, when the piston is at top dead centre, is called the clearance volume.
- (vi) Swept volume—The volume swept through the piston in moving between top dead centre and bottom dead centre, is called swept volume or piston displacement.

- total cylinder volume to clearance volume.
- (viii) Piston speed—The average speed of the piston is called piston speed.

Comparison between two stroke and four stroke I.C. engines

Two stroke I.C. engine	Four stroke I.C. engine
Two stroke engine complete the cycle of operations in two strokes of the piston.	 In four stroke engine, the working cycle of operations is com- pleted in four strokes of the piston.
Two stroke I.C. engines are simple in design.	Four stroke I.C. engines are complicated in design.
 Two stroke I.C. engines are less com- plicated in constru- ction. 	Four stroke I.C. engines are more complicated in construction.
 Output of the two stroke I.C. engines is more. It is approxi- mately 60 to 80% more than four stroke engines. 	Output of the four stroke I.C. engines is less.
There is one working stroke and once fuel is burnt in each revo- lution of the crank shaft.	 There is one working stroke and once the fuel is burnt in two revolutions of the crank shaft.
 In two stroke I.C. engines a lighter fly- wheel is used because there is a little prob- lem of balancing. 	 In four stroke I.C. engines there is no problem of balancing.
 The two stroke I.C. engines are less effi- cient. 	The four stroke I.C. engines are more efficient.
Two stroke I.C. en- gines consume more lubricating oil.	Four stroke I.C. engines consume less lubricating oil.
 There is more wear and tear in two stroke I.C. engine. 	9. There is less wear and tear in it.
10. It is more noisy.	10. It is less noisy.
11. There is more fuel	11. There is less fuel con-

sumption

consumption.

(vii) Compression ratio-It is the ratio of Comparison between petrol engine and diesel engine

Petrol Engine	Diesel Engine
 Air petrol mixture is sucked in the engine. 	 Only air is sucked during suction stroke.
2. Spark plug is used.	Employs an injector.
Power is produced by spark ignition.	Power is produced by compression ignition.
 Thermal efficiency upto 25%. 	4. Thermal efficiency upto 40%
Occupies less space.	Occupies more space.
More running cost.	Less running cost.
7. Light in weight.	Heavy in weight.
Fuel (Petrol) cos- tlier.	Fuel (Diesel) cheaper.
Petrol being volatile is dangerous.	Diesel is non dan- gerous as it is non- volatile.
10. Pre-ignition possible.	Pre-ignition not possi- ble.
11. Works on Otto cycle.	11. Works on Diesel cycle
12. Less dependable.	12. More dependable.
13. Used in car and motor cycles.	13.Used in heavy duty vehicles like trucks, buses and heavy machinery.
 Compression ratio is low, i.e. 7: 1 to 10: 1. 	14. Compression ratio is high 11:1 to 22:1.
 Maintaining cost is more. 	15. Maintaining cost is less.

Performance of I.C. Engine

The basic performance parameters are as below:

- Power and mechanical efficiency (i)
- Mean effective pressure and torque (ii)
- Specific output
- Volumetric efficiency
- Fuel-air ratio (v)
- (vi) Specific fuel consumption
- (vii) Thermal efficiency and heat balance
- (viii) Exhaust smoke and other emissions
- Specific weight (ix)

Indicated Power

I.P. =
$$\frac{n P_{mi} LANK \times 10}{6} KW$$

Where n = No. of cylinders

 P_{mi} = Indicated mean, effective pressure bar

L = Length of stroke, in metre

A = Area of piston in metre square

 $K = \frac{1}{2} \text{ for 4-stroke engine}$ = 1 for 2-stroke engine

Brake Power

B.P. =
$$\frac{2\pi N T}{60 \times 1000} KW$$

N = Speed in r.p.m.

and T = Torque in N-m

OBJECTIVE QUESTIONS

- Which of the following is an S.I. engine?
 - (A) Diesel engine
- (B) Petrol engine
- (C) Gas engine
- (D) None of the above
- 2. Which of the following is C.I. engine?
 - (A) Diesel engine
- (B) Petrol engine
- (C) Gas engine
- (D) None of the above
- In a four stroke cycle petrol engine, during suction stroke—
 - (A) Only air is sucked in
 - (B) Only petrol is sucked in
 - (C) Mixture of petrol and air is sucked in
 - (D) None of the above
- In a four stroke cycle diesel engine, during suction stroke—
 - (A) Only air is sucked in
 - (B) Only fuel is sucked in
 - (C) Mixture of fuel and air is sucked in
 - (D) None of the above
- Compression ratio of petrol engines is in the range of—
 - (A) 2 to 3
- (B) 7 to 10
- (C) 16 to 20
- (D) 80 to 90
- Compression ratio of diesel engines may have the range—
 - (A) 8 to 10
- (B) 10 to 15
- (C) 16 to 20
- (D) 80 to 90
- The thermal efficiency of good I.C. engine at the rated load is in the range of—
 - (A) 80 to 90%
- (B) 60 to 70%
- (C) 30 to 35%
- (D) 10 to 20%
- Carburettor is used for—
 - (A) S.I. engine
- (B) Gas engine
- (C) C.I. engine
- (D) None of the above

- 9. Fuel injector is used in-
 - (A) S.I. engine
- (B) Gas engine
- (C) C.I. engine
- (D) None of the above
- 10. Very high speed engines are generally-
 - (A) Gas engines
- (B) S.I. engines
- (C) C.I. engines
- (D) Steam engines
- In S.I. engine, to develop high voltage for spark plug—
 - (A) Battery is installed
 - (B) Distributor is installed
 - (C) Carburettor is installed
 - (D) Ignition coil is installed
- In S.I. engine, to obtain required firing order—
 - (A) Battery is installed
 - (B) Distributor is installed
 - (C) Carburettor is installed
 - (D) Ignition coil is installed
- For petrol engine, the method of governing employed is—
 - (A) Quantity governing
 - (B) Quality governing
 - (C) Hit and miss governing
 - (D) None of the above
- For diesel engine, the method of governing employed is—
 - (A) Quantity governing
 - (B) Quality governing
 - (C) Hit and miss governing
 - (D) None of the above

- plug is in the range_
 - (A) 6 to 12 volts
 - (B) 1000 to 2000 volts
 - (C) 20000 to 25000 volts
 - (D) None of the above
- In a 4-cylinder petrol engine the standard firing order is—
 - (A) 1-2-3-4
- (B) 1-4-3-2
- (C) 1-3-2-4
- (D) 1-3-4-2
- 17. The torque developed by the engine is maximum —
 - (A) At minimum speed of engine
 - (B) At maximum speed of engine
 - (C) At maximum volumetric efficiency speed of engine
 - (D) At maximum power speed of engine
- Iso octane content in a fuel for S.I. engine—
 - (A) Retards auto-ignition
 - (B) Accelerates auto-ignition
 - (C) Does not affect auto-ignition
 - (D) None of the above
- 19. Normal heptane content in a fuel for S.I. engine —
 - (A) Retards auto-ignition
 - (B) Accelerates auto-ignition
 - (C) Does not affect auto-ignition
 - (D) None of the above
- The knocking in S.I. engine increases with—
 - (A) Increase in inlet air temperature
 - (B) Increase in compression ratio
 - (C) Increase in cooling water temperature
 - (D) All the above
- 21. Petrol commercially available in India for Indian passenger cars has octane number in the range —
 - (A) 40 to 50
- (B) 60 to 70
- (C) 80 to 85
- (D) 95 to 100
- Cetane number of the fuel used commercially for diesel engine in India is in the range—
 - (A) 80 to 90
- (B) 60 to 80
- (C) 60 to 70
- (D) 40 to 45

- 15. Voltage developed to strike spark in the spark 23. The injection presence in diesel engine is of the order of—
 - (A) 30–40 bar
- (B) 100–150 bar
- (C) 170-220 bar
- (D) 400–600 bar
- 24. The ignition temperature of diesel fuel is about —
 - (A) 200°C
- (B) 400°C
- (C) 550°C
- (D) 700°C
- 25. In a petrol engine the delay period is of the order of —
 - (A) 0.001 s
- (B) 0·002 s
- (C) 0.015 s
- (D) 0.06 s
- 26. is not the effect of detonation—
 - (A) Loud and pulsating noise
 - (B) High local stresses
 - (C) High operating temperature
 - (D) Loss in efficiency and power output
- 27. The ignition quality of a petrol engine fuel is expressed as —
 - (A) Octane number (B) Cetane number
 - (C) API gravity
- (D) SAE rating
- The capacity of most of the mopeds in India is—
 - (A) 50 cc
- (B) 150 cc
- (C) 200 cc
- (D) 250 cc
- is used for the insulating body of a spark plug.
 - (A) Dolomite
- (B) Alumina
- (C) Glass
- (D) Silica
- The compression ratio in diesel engine is in comparison to expansion ratio—
 - (A) Less
- (B) More
- (C) Same
- (D) Variable
- In an automobile the magneto is basically—
 - (A) d.c. generator
- (B) a.c. generator
- (C) Transformer
- (D) Capacitor
- Scavenging is usually done to increase—
 - (A) Power output
 - (B) Fuel consumption
 - (C) Thermal efficiency
 - (D) Speed

64	Mech. Engg.						
33.		for vehicles the air fuel ower generation is of the (B) 12:1 (D) 20:1		(A) 2 (C) 4	er of rings in a piston— (B) 3 (D) 6 t associated with diesel		
34.	. ,	ne top of the piston is—		(A) Constant pressu(B) Constant volum(C) Adiabatic			
35.		ncy of a carburettor is— (B) Maximum (D) Poor	45.	(D) Isothermal	owhich of the following?		
36.	can work on ve	ry lean mixture.	16	(B) Poor-control by the governor(C) Over-control by the governor(D) Bad engine design			
37.	Thermal efficiency mixture is— (A) Lower (C) Unaffected	of I.C. engine on weak (B) Higher (D) Unpredictable	40.	when— (A) It runs at lowest (B) It develops max (C) It consumes max	imum power ximum fuel		
38.	Cetane number is the (A) Viscosity of fue (B) Ignition quality (C) Calorific value (D) None of the abo	l of fuel	47.		the number of cylinders gine the power to weight		
39.	which of the following (A) Regulates batter	y voltage	48.	(C) Remains unaffe (D) None of the about Lean air-fuel mixture	ve		
	(B) Avoids sparking(C) Controls spark(D) Supplies high volume	oltage to the spark plug	49.	(A) Idling(C) Starting is not a part of j	(D) Cruising		
40.	available petrol in In (A) 15-35	(B) 45-55		(A) Air filter(B) Induction coil(C) Valve mechanis(D) Fuel injector	m		
41.		(D) 85–90 technique is used for inder of a scooter engine. (B) Splash (D) Forced feed	50.	of heat supplie	d in the form of fuel in a carried away by exhaust (B) 8-12% (D) 45-55%		
42.	the crank shaft (A) Half	(B) Three-fourth	51.	brake specific fuel co (A) No load	•		
	(C) Equal	(D) Double		(B) 20–30% of full	load		

61. The cam shaft of a 4-stroke I.C. engine run-

(A) 2000 r.p.m. (B) 1500 r.p.m.

(C) 1000 r.p.m. (D) 500 r.p.m.

ning at 2000 r.p.m. will run at-

	(D) Condinat	62 In a cycle the spark lasts for
	(B) Sand cast	62. In a cycle the spark lasts for—
	(C) Forged	(A) 0·001 s (B) 0·01 s
	(D) Turned from bar stock	(C) 0·1 s (D) 1 s
53.	has maximum resistance to detonation (A) Alcohol (B) Benzene (C) Toulene (D) Iso-octane	. 63. By which of the following is the air pressure produced in the crankcase method of scavenging? (A) Natural aspiration
54.	In isochronous governors the speed drop is-	
	(A) Zero (B) 5%	(C) Supercharger
	(C) 30% (D) 50%	(D) None of the above
55.	The top ring nearest to the piston crown known as—	
	(A) Compression ring	(A) 180° of crank rotation
	(B) Oil ring	(B) 360° of crank rotation
	(C) Scrapper ring	(C) 540° of crank rotation
	(D) Groove ring	(D) 720° of crank rotation
56.	A diesel engine as compared to petrol engines—	ne 65. Displacement volume or swept volume is the volume displaced by the piston in—
	(A) Less efficient (B) More efficient	(A) 2-strokes (B) 4-strokes
	(C) Equal efficient (D) None of the above	(C) 1-stroke (D) $\frac{1}{2}$ -stroke
57.	The level of oil in engine cylinder should checked when the engine is—	2
	(A) Running (B) Not running	(A) 400 r.p.m. (B) 800 r.p.m.
	(C) During starting (D) During cranking	(C) 1600 r.p.m. (D) None of the above
58.	Endurance for I.C. engine is conducted for-	•
	(A) 200 hours (B) 300 hours	(A) Carnot cycle
	(C) 400 hours (D) 500 hours	(B) Rankine cycle
50	Movement of air inside engine cylinder do	(C) Constant pressure cycle
59.	not help in—	(D) Constant volume cycle
	(A) Reducing noise	68. C.I. engine works on—
	(B) Mixing of fuel with air	(A) Bell Coleman cycle
	(C) Distribution of fuel	(B) Carnot cycle
	(D) Reducing after burning	(C) Constant pressure heat addition cycle (D) Otto cycle
60	An engine indicator is used to determine—	(D) Otto cycle
00.	(A) Temperature	69. The term 'Bore' in I.C. engine is used for—
	(B) m.e.p. and I.P.	(A) Inside diameter of cylinder (B) Diameter of pigton
	(C) Speed	(B) Diameter of piston (C) Diameter of piston ring
	(D) Volume of cylinder	(C) Diameter of piston ring (D) None of the above
	(2) Totalic of Cylinder	(D) None of the above

(C) About 70% of full load

(D) Near full load

(A) Die cast

52. Crank shafts are generally -

66	Mech. Engg.			
70.	Which of the following is related to S.I. engine only? (A) Ignition coil (B) Flywheel (C) Intel valve (D) Piston		The main bearings of the engine support— (A) Crank shaft (B) Cam shaft (C) Both (D) None of the above In a six cylinder C.I. engine the number of	
71.	In S.I. engine the method of governing used is— (A) Quantitative governing	01.	spark plugs required are— (A) 6 (B) 1 (C) 12 (D) 0	
	(B) Hit and miss governing(C) Qualitative governing(D) None of the above	6	Which of the following is related to S.I. engine? (A) Atomiser (B) D-slide valve	
72.	e injection pressure in diesel engine is tween— 0 0 — 10 kg/cm ²	83.	(C) Magneto (D) Fusible plug 3. The material used for the cylinder block is— (A) Stricton stock (B) Converget income.	
	(B) 10 — 50 kg/cm ² (C) 100 — 150 kg/cm ² (D) None of the above		(A) Stainless steel (B) Grey cast iron (C) Copper (D) Bronze Connecting rod is made of—	
73.	Which one is not related to I.C. engine? (A) Gas turbine (B) 4-stroke C.I. engine		 (A) Cast iron (B) Aluminium alloy (C) Copper alloy (D) Medium carbon steel 	
	(C) Steam turbine (D) None of the above		Piston rings are made of— (A) Babi H (B) Bronze	
74.	Which is related to C.I. engine only? (A) Carburettor (B) Spark plug (C) Atomiser (D) Distributor	86.	(C) Cast iron (D) Steel alloys Which is related to C.I. engine?	
75.	In a low speed S.I. engine the inlet valve closes—		(A) Carburettor (B) Spark plug (C) Injector (D) Distributor	
	(A) 40° after B.D.C. (B) 30° before B.D.C. (C) 10° after B.D.C. (D) 10° before B.D.C.	87.	The material of the exhaust valve is— (A) Aluminium alloy (B) Cast iron	
76.	In a high speed S.I. engine, the exhaust valve starts to open— (A) 10° after B.D.C. (B) 15° before B.D.C.	00	(C) Silicon chrome steel (D) None of the above	
77.	(C) 55° after B.D.C. (D) 45° before B.D.C. The minimum number of compression rings provided on a piston are—	00.	The flywheel is located on the— (A) Rocker arm shaft (B) Crank shaft (C) Com shaft	
	(A) 2 (B) 4 (C) 1 (D) 3		(C) Cam shaft (D) All of the above The face angle of the poppet type valve is	
78.	In four stroke four cylinder C.I. engine the number of spark plugs used are— (A) Four (B) Eight	οy.	The face angle of the poppet tupe valve is generally— (A) 15° (B) 20° (C) 45° (D) 75°	
79.	(C) One (D) Zero In a four cylinder gasoline engine of a fiat car	90.	The electrode of a spark plug is made of— (A) Copper-alloy	
	the number of carburettors fitted are— (A) One (B) Two	000	(B) Alluminium alloy (C) Nickel chromium alloy	

(D) White metal

(C) Three

(D) Four

91.	The I.H.P. of an individual cylinder of a	100.	The octane value of iso-octane is—
	multi-cylinder engine can be determined by —		(A) 0 (B) 76
	(A) An indicator		(C) 100 (D) 97
	(B) A morse test	101.	In a six cylinder engine, the power impulse
	(C) A rope brake dynamometer		occurs after 'x' degrees of crank shaft rotation,
	(D) None of the above		where 'x' is—
92.	An engine indicator is used to find out—		(A) 100 (B) 110
	(A) b.h.p.		(C) 120 (D) 360
	(B) f.h.p.	102.	Firing order of a 6-cylinder in line engine is
	(C) Piston speed		usually — (A) 1–6–3–5–2–4 (B) 1–4–3–2–6–5
	(D) Mean effective pressure		(C) 1-3-6-2-4-5 (D) 1-5-3-6-2-4
93.	The octane value of normal heptane is—	103	Can engines are usually—
	(A) 0 (B) 10	105.	(A) Single cylinder type
	(C) 100 (D) 76		(B) Two-cylinder type
04	The capacity of the battery is given in terms		(C) Four-cylinder in line type
>4.	of—		(D) Four cylinder V type
	(A) Ampere-hour	104	The fluctuation of engine speed during a
	(B) Voltage	104.	cycle depends upon—
	(C) Weight of battery		(A) Mass of flywheel
	(D) Volume of electrolyte		(B) Mass of crank shaft
05	The battery generally used in a coil ignition		(C) Speed of flywheel
,,,	system is of—		(D) Power output
	(A) 1.5 volts (B) 3 volts	105.	The materials used for cylinder block are-
	(C) 12 volts (D) 24 volts		(A) Cast iron and steel
96.	The temperature after ignition in I.C. engine		(B) Cast iron and aluminium alloy
	is in the range of—		(C) Steel and aluminium alloy
	(A) 100° C to 150°C		(D) Brass and steel
	(B) 150° C to 250°C	106.	On the compression stroke the rings are
	(C) 250° C to 500°C		pressed against—
	(D) 2000° C to 2500°C		(A) Bottom of groove
97.	The lubricant used in I.C. engine are-		(B) Top of groove
	(A) Vegetable oils (B) Animal oils		(C) Inner side of groove (D) All of these
	(C) Graphite (D) Mineral oils	107	The uppermost ring on a piston is usually
98	Viscosity meter is the instrument used for finding out the fluid's—		plated with—
			(A) Cast iron (B) Chromium
	(A) Flash point (B) Viscosity		(C) Steel (D) Aluminium
	(C) Fire point (D) None of the above	108.	Compression rings are generally made of-
99.	The chemically correct air fuel ratio for a		(A) High carbon steel
	gasoline engine is-		(B) Low carbon steel
	(A) 5:1 (B) 10:1		(C) Cast iron
	(C) 15·12:1 (D) 20:1		(D) Aluminium

68 | Mech. Engg.

109.	In a six-cylinder car	Answers					
	the successive crank	throws is—					
	(A) 60°	(B) 90°	1. (B)	2.(A)	3.(C)	4. (A)	5.(B)
	(C) 110°	(D) 120°	6. (C)	7. (C)	8. (A)	9.(C)	10.(B)
110.		bearings in a 4-cylinder	11. (B)	12. (B)	13. (A)	14.(B)	15.(C)
	car engine is usually	_	16. (D)	17. (C)	18. (A)	19.(B)	20. (D)
	(A) 2	(B) 3	21. (C)	22.(D)	23.(B)	24.(B)	25.(B)
	(C) 4	(D) 6	26. (D)	27.(A)	28. (A)	29.(B)	30.(B)
111.	Exhaust valve face at		31. (A)	32.(A)	33.(B)	34. (D)	35. (D)
	(A) 30°	(B) 45°			. ,		
	(C) 60°	(D) 75°	36. (A)	37. (B)	38. (B)	39. (D)	40. (D)
112.	The engine valve are	closed by-	41. (A)	42.(A)	43. (A)	44. (D)	45.(C)
	(A) Crank shaft	(B) Cam shaft	46. (A)	47. (A)	48. (D)	49. (D)	50.(C)
	(C) Valve spring	(D) Timing device	51. (D)	52. (C)	53. (D)	54. (A)	55. (A)
113.	The throttle valve co	ntrols the supply of—	56. (B)	57. (B)	58. (D)	59. (A)	60.(B)
	(A) Air only	(B) Fuel only	61. (A)	62. (C)	63.(B)	64.(B)	65.(C)
	(C) Air fuel mixture	(D) None of these	66. (B)	67.(D)	68.(C)	69. (A)	70. (A)
114.		etrol injection system is	71. (A)	72. (C)	73.(C)	74.(C)	75.(C)
	the-		76. (C)	77. (C)	78. (D)	79. (A)	80. (A)
	(A) Direct injection		81. (D)	82. (C)	83.(B)	84. (D)	85. (D)
	(B) Port injection		86. (C)	87. (C)	88.(B)	89.(C)	90.(C)
	(C) Manifold injecti		91. (B)	92.(D)	93. (A)	94. (A)	95.(C)
115	(D) Throttle body in	•	96. (D)	97. (D)	98.(B)	99.(C)	100.(C)
115.	usually varies between	ciency for S.I. engines	101. (C)	102.(D)	103.(C)	104. (A)	105.(B)
	(A) 25% and 30%	(B) 30% and 60%	106.(A)	107. (B)	108. (C)	109. (D)	110.(B)
	(C) 60% and 80%	(D) More than 80%	111. (B)	112. (C)	113.(C)		115. (A)

7

STEAM BOILERS, COMPRESSORS, ENGINES, NOZZLES, TURBINES, GAS TURBINES AND JET ENGINES

Boiler

Simply a boiler may be defined as a closed vessel in which steam is produced from water by combustion of fuel.

The Steam Generated is employed for the following purposes

- (i) For generating power in steam engines or steam purpose.
- (ii) In the textile industries for sizing and bleaching etc. and many other industries like sugar mills, chemical industries.
- (iii) For heating the building in cold weather and for producing hot water for hot water supply.

The primary requirements of steam generators or boilers are

- The water must be contained safely.
- (ii) The steam must be safely delivered in desired condition.

Classification of Boilers

Boilers can be classified in a number of ways but the main bases for the classification of boilers can be as follows:

- Horizontal, vertical and inclined boilers.
- (ii) Stationary, portable and marine boilers.
- (iii) Water tube and fire tube boilers.
- (iv) Single tube and multi tube boilers.
- (v) Internally fired and externally fired boilers.
- (vi) Naturally circulated and forced circulated boilers.
- (vii) Source of heat (solid fuel, liquid and gaseous fuel, electrical and nuclear energy).

(viii) Low pressure, medium pressure and high pressure boilers.

Boiler Mountings

These are the fittings, which are mounted on the boiler for its proper and safe functioning. Some important boiler mountings are—

- (i) Water level indicator
- (ii) Pressure gauge
- (iii) Safety valves
- (iv) Stop valve
- (v) Blow off cock
- (vi) Feed check valve
- (vii) Fusible plug

Boiler Accessories

These are the devices which are used as integral parts of a boiler, and help in running it efficiently. Some important accessories are—

- (i) Feed pump
- (ii) Superheater
- (iii) Economiser
- (iv) Air preheater

Essentials of a good Boiler

- (i) A boiler should be light in weight, compact and should occupy a small space.
- (ii) A boiler should be capable of starting very quickly.
- (iii) A boiler should allow easy, cheap and quick maintenance.
- (iv) A boiler should be capable of meeting with the large variations in the load.
- (v) In a boiler the velocity of water and fuel gases should be minimum after they have overcome the heavy frictional losses.

- (vi) All the joints and fittings of a boiler should be easily accessible.
- (vii) In a boiler, the flames produced by the combustion of the fuel should not impinge on its joints.
- (viii) In a boiler, water scaling and soot etc. should not collect in the tubes.
- (ix) The tube of the boiler should be sufficiently strong to allow wear and corrosion.
- (x) In the boiler the mud and other deposits should not collect on the heated surfaces.
- (xi) A boiler should be capable of producing maximum amount of steam for minimum fuel consumption.
 - (xii) A boiler should have low initial cost.
- (xiii) A boiler should have low cost of erection.
 - (xiv) A boiler should have high efficiency.

Advantages of High Pressure Boiler

The following are the advantages of high pressure boiler:

- (i) In high pressure boilers pumps are used to maintain forced circulation of water through the tubes of the boiler.
- (ii) The heat of combustion is utilised more efficiently by the use of small diameter tubes in large number and in multiple curcuits.
- (iii) Pressurised combustion is used which increases rate of firing of fuel thus increasing the rate of heat release.
- (iv) Due to compactness less floor space is required.
- (v) All the parts are uniformly heated, therefore the danger of overheating is reduced and thermal stress problem is simplified.
 - (vi) All the parts are uniformly heated.
- (vii) The differential expansion is reduced due to uniform temperature and this reduces the possibility of gas and air leakages.
- (viii) The steam can be raised quickly to meet the variable load requirements without the use of complicated control devices.
- (ix) The efficiency of plant is increased upto 40 to 42% by using high pressure and high temperature steam.
- (x) A very rapid start from cold is possible if external supply of power is available.

(xi) Use of high pressure and high temperature steam is economical.

Advantages of Velox Boiler

- (i) The boiler is very compact and has greater flexibility.
 - (ii) Very high combustion rates are possible.
 - (iii) It can be quickly started.
- (iv) Low excess air is required as the pressurised air is used and the problem of draught is simplified.

Advantages of Supercharged Boiler

- (i) Owing to very high overall heat transfer coefficient the heat transfer surface required is hardly 20 to 25% of the heat transfer surface.
- (ii) The part of the gas turbine output can be used to drive other auxiliaries.
- (iii) Small heat storage capacity of the boiler plant gives better response to control.
 - (iv) Rapid start of the boiler is possible.
- (v) Comparatively less number of operators are required.

Steam Nozzles—A steam nozzle may be defined as a passage of varying cross-section, through which heat energy of steam is converted to kinetic energy.

Hydraulic Turbines—A hydraulic turbine is a prime mover that uses the energy of flowing water and converts it into mechanical energy in the form of rotation of the runner.

Classification of Hydraulic Turbine

- (A) According to the action of the working liquid:
 - (i) Impulse turbines
 - (ii) Reaction turbines
- (B) According to the direction of flow of the working fluid i.e. water in the runners:
 - (i) Axial flow turbines
 - (ii) Radial flow turbines
 - (iii) Tangential flow turbines
 - (iv) Mixed flow turbines
- (C) According to the head of water available and the quality of water required for flow :
 - (i) High head turbines
 - (ii) Medium head turbines
 - (iii) Low head turbines

- (D) According to the name of the inventor of the turbine :
 - (i) Pelton wheel or pelton turbine
 - (ii) Francis turbine
 - (iii) Kaplan turbine
- (E) According to the specific speed of the turbine:
 - (i) Single jet pelton wheels
 - (ii) Francis turbine
 - (iii) Propeller turbine
- (F) According to the position of the shaft of the rotor:
 - (i) Horizontal turbines
 - (ii) Vertical turbines

Steam Turbine—A steam turbine is a prime mover in which the gradual change in the momentum of the steam are utilized to produce the rotary motion of the moving member. The desired momentum of steam is obtained by changing the direction of the jet of steam coming out at a high velocity from a nozzle.

Classification of Steam Turbines

- (A) With respect to the action of the steam :
 - (i) Impulse turbines
 - (ii) Reaction turbines
 - (iii) Combination of impulse and reaction
- (B) With respect to the number of rotors:
 - Single stage
 - (ii) Multi stage
- (C) With respect to the acting pressure of the steam:
 - (i) High pressure steam turbines
 - (ii) Medium pressure steam turbines
 - (iii) Low pressure steam turbines
- (D) With respect to the outlet pressure of steam from the turbine after expansion or action :
 - (i) Condensing steam turbine
 - (ii) Non-condensing steam turbine
- (E) With respect to the direction of flow of steam:
 - (i) Axial flow steam turbines
 - (ii) Radial flow steam turbines
 - (iii) Tangential flow steam turbines
 - (iv) Mixed flow steam turbines
 - (v) Helical flow steam turbines
 - (vi) Re-entry flow type steam turbines

- (F) With respect to the source of supply of steam:
 - (i) Extraction type steam turbines
 - (ii) Accumulator type steam turbines

Compressors—The compressed air finds application in the following fields.

- (i) Operating tools in factories
- (ii) Operating drills and hammers in road building
 - (iii) Excavating
 - (iv) Tunneling and mining
 - (v) Starting diesel engines
- (vi) Operating brakes on buses, trucks and trains

Gas Turbines—The following are the major fields of application of gas turbines:

- (i) Aviation
- (ii) Power generation
- (iii) Oil and gas industry
- (iv) Marine propulsion

The gas turbine have the following limitations —

- (i) They are not self starting
- (ii) Low efficiency at part loads
- (iii) Non reversibility
- (iv) Higher rotor speeds
- (v) Overall efficiency of the plant low

Classification—The gas turbine are mainly divided into two groups:

- (i) Constant pressure combustion gas turbine;
 - (a) Open cycle (b) Closed cycle
- (ii) Constant volume combustion gas turbine

Merits and demerits of closed cycle turbine over open cycle turbine

- (A) Merits of closed cycle :
 - (i) Higher thermal efficiency
 - (ii) Reduced size
 - (iii) No contamination
 - (iv) Improved heat transmission
 - (v) Improved part load efficiency
 - (vi) Lesser fluid friction
 - (vii) No loss of working medium
 - (viii) Greater output
 - (ix) Inexpensive fuel
- (B) Demerits of closed cycle :
 - Complexity
 - (ii) Large amount of cooling water is required.

- (iii) Dependent system
- The weight of the system per H.P. (iv) developed is high comparatively, therefore not economical for moving vehicles
- (v) Requires the use of a very large air heater

Jet Propulsion

Jet propulsion systems are the system in which the work output of the gas turbine plant is used to produce high velocity jet of hot gases and this jet is used to propel the vehicles in which the systems are mounted.

The various types of jet propulsion systems are as:

- (i) Screw propeller
- (ii) Turbo jet
- (iii) Turbo-prop
- (iv) Ram jet

Advantage of Turbo Jet Engines

- (i) Construction much simpler
- (ii) Engine vibrations absent
- (iii) Much higher speeds possible

- (iv) Power supply is uninterrupted and smooth
 - (v) Weight to power ratios superior
 - (vi) Rate of climb higher
- (vii) Requirement of major over-hauls less frequent
 - (viii) Radio interference much less
 - (ix) Maximum altitude ceiling
 - (x) Frontal area smaller
- (xi) Fuel can be burnt over a large range of mixture strength

Disadvantages of Turbo Jet Engines

- (i) Less efficient
- (ii) Life of the unit comparatively shorter
- (iii) The turbo jet becomes rapidly inefficient below 550 km/h
 - (iv) More noisy
 - (v) Materials required are quite expensive
- (vi) Requires longer strip since length of take off is too much
- (vii) At take-off the thrust is low, this defect is overcome by boosting

OBJECTIVE QUESTIONS

- 1. During the reversible adiabatic process, the entropy of steam —
 - (A) Remains constant
 - (B) Increases
 - (C) Decrease
 - (D) None of the above
- With the increase in pressure the latent heat of vaporization —
 - (A) Decreases
 - (B) Increases
 - (C) Remains constant
 - (D) None of these
- 1 Kg. of wet steam contains 0.15 Kg of water particles. Its dryness fraction is—
 - (A) 15%
- (B) 100%
- (C) 85%
- (D) None of these
- The throttling process on a mollier diagram is represented by a-
 - (A) Horizontal line (B) Vertical line
 - (C) Point
- (D) Curve

- 5. For a given law $P \times V^n = Constant$, the value of n is given by the relation-
 - (A) 1.135 + 0.1x
- (B) 1.035 + 0.1x
- (C) 1.035 0.1x
- (D) 1.135 0.1x
- Which equation is true for the total heat of dry steam?
 - (A) h/w + x L
 - (B) h/w + L
 - (C) $h/w + L + C_p$
 - (D) $x L + C_p (T_{sup} T_{sat})$
- The critical temperature of steam is—
 - (A) 225.65 kg/cm² (B) 252.65 kg/cm²

 - (C) 347·15 kg/cm² (D) 374·15 kg/cm²
- Clapeyron's equation is used for evaluating—
 - (A) Specific volume at any temperature and pressure
 - (B) Dryness fraction of steam
 - (C) Entropy of superheated steam
 - (D) Total heat of saturation

- A device used for generating steam for power generation is known as—
 - (A) Turbine
- (B) Steam engine
- (C) Re-boiler
- (D) None of these
- In a boiler if the furnace region is completely surrounded by water it is known as—
 - (A) Externally fired boiler
 - (B) Internally fired boiler
 - (C) Water tube boiler
 - (D) None of these
- Central station steam generators are used for—
 - (A) Electric power generator
 - (B) Process heating in industries
 - (C) Residential heating
 - (D) Locomotives
- The maximum pressure in a miniature boiler is—
 - (A) 1 Kg/cm²
- (B) 10 Kg/cm²
- (C) 25 Kg/cm²
- (D) 6.9 Kg/cm²
- The concentration of soluble salts and solid is reduced to the desired level by—
 - (A) Priming
 - (B) Blow-down
 - (C) Gravity separation
 - (D) None of these
- 14. The fusible plug is situated-
 - (A) Near the manhole
 - (B) Just below the water level
 - (C) At the crown of the furnance
 - (D) At the base of the boiler
- Steam used in high pressure turbines must not contain impurities—
 - (A) More than 10 p.p.m.
 - (B) More than 0·3 p.p.m.
 - (C) More than 250 p.p.m.
 - (D) More than 500 p.p.m.
- 16. The induced draft of the fan is used-
 - (A) Before the furnance
 - (B) At the base of the chimney
 - (C) At the top of the chimney
 - (D) In the manhole

- The amount of K.cal. required to heat 1 kg. of water at 100°C to dry saturated steam at 100°C is—
 - (A) 539 K.cal.
- (B) 100 K.cal.
- (C) 53.9 K.cal.
- (D) None of these
- In terms of equal evaporation on boiler HP is equal to—
 - (A) 1.5563 Kg
- (B) 15.563 Kg
- (C) 34·5 Kg
- (D) 11 Kg
- Smokeless or compact boiler is a—
 - (A) Three pass boiler
 - (B) Two pass boiler
 - (C) Single pass boiler
 - (D) None of these
- In a super critical boiler the pressure range is—
 - (A) 50 to 100 kg/cm²
 - (B) 100 to 150 kg/cm²
 - (C) 150 to 200 kg/cm²
 - (D) 225 to 250 kg/cm²
- 21. Lancashire boiler is a-
 - (A) Single pass boiler
 - (B) Two pass boiler
 - (C) Three pass boiler
 - (D) Four pass boiler
- A boiler known as a small steam jenny is used for—
 - (A) Power generator
 - (B) Heating purpose
 - (C) Spray painting
 - (D) None of these
- If the steel boiler is properly installed and looked after its average life will be—
 - (A) 5 years
- (B) 20 years
- (C) 50 years
- (D) 75 years
- To produce one unit of electricity the approximate amount of coal burnt is—
 - (A) 0.5 Kg
- (B) 1.6 Kg
- (C) 5 Kg
- (D) 10 Kg
- In a babcock and wilcox boiler the tubes are inclined at—
 - (A) 0°
- (B) 90°
- (C) 15°
- (D) 45°

- 26. Economiser is used for-
 - (A) Superheating the steam
 - (B) Pre-heating of the feed water
 - (C) Pre-heating the air
 - (D) Condensing the exhaust steam of the engine
- 27. The Horse Power (H.P.) of boiler indicate -
 - (A) The maximum pressure at which steam can be generated
 - (B) The rate of generator of steam
 - (C) The capacity of the shell
 - (D) None of these
- 28. The function of fusible plug is-
 - (A) To drain off the water of the shell
 - (B) To prevent damage of boiler against over-heating
 - (C) To blow off excess of steam
 - (D) None of these
- In tancashire boiler the number of fuel tubes are—
 - (A) 2
- (B) 3
- (C) 4
- (D) 5
- 30. The function of superheater is to-
 - (A) Pre-heat the feed water
 - (B) Pre-heat the air
 - (C) Increase the temperature of steam above saturation temperature
 - (D) Increase the rate of combustion of fuel
- The maximum working pressure of fire tube boiler is limited to—
 - (A) 1.5 kg/cm²
- (B) 5 kg/cm²
- (C) 20 kg/cm²
- (D) 100 kg/cm²
- In a steam engine can be a horizontal, vertical or inclined. This classification is according to the—
 - (A) Expansion of steam
 - (B) Position of cylinder
 - (C) Field of application
 - (D) Speed of the engine
- A steam engine having a speed of 275 r.p.m. is termed as a—
 - (A) High speed engine
 - (B) Low speed engine
 - (C) Medium speed engine
 - (D) None of these

- 34. In case of a condensing steam engine the exhaust from the steam engine is directly sent to the—
 - (A) Atmosphere
- (B) Condenser
- (C) Hot well
- (D) Economiser
- In a double acting steam engine the number of working strokes per revolution are—
 - (A) 1
- (B) 2
- (C) 3
- (D) 4
- The efficiency of the Rankine cycle is given by the relation—
 - (A) $\frac{H_1 H_2}{H_1 Hw_2}$
- (B) $\frac{H_1 + H_2}{H_1 Hw_2}$
- (C) $\frac{H_1 + H_2}{H_1 + Hw_2}$
- (D) $\frac{H_1 H_2}{H_1 + Hw_2}$
- 37. Steam engine works on-
 - (A) Constant volume cycle
 - (B) Constant pressure cycle
 - (C) Rankine cycle
 - (D) Joule's cycle
- 38. Diagram factor is always-
 - (A) More than one
- (B) Less than one
- (C) Equal to one
- (D) None of these
- The approximate value of diagram factor is—
 - (A) 0·2
- (B) 0·5
- (C) 0·7
- (D) 1·2
- Willian's law is expressed mathematically as—
 - (A) w = a + B.H.P. + b
 - (B) $w = a \times I.H.P. + b$
 - (C) $w = a \times F.H.b$
 - (D) $w = a \times I.H.P. b$
- In Rankine cycle expansion of steam assumed to be—
 - (A) Adiabatic
- (B) Polytropic
- (C) Hyperbolic
- (D) Isothermal
- The expansion of steam in hypothetical indicated diagram is assumed to be—
 - (A) Isothermal
- (B) Polytropic
- (C) Hyperbolic
- (D) Adiabatic
- The thermal efficiency of a steam engine is about—
 - (A) 10%
- (B) 25%
- (C) 50%
- (D) 80%

- 44. When the steam is carried from boiler to the 52. The work input to air compressor is minimum engine, the pressure of steam-
 - (A) Will increase
 - (B) Will decrease
 - (C) Will remain same
 - (D) None of these
- 45. The ratio of thermal efficiency to the standard efficiency is defined as-
 - (A) Overall efficiency
 - (B) Standard efficiency
 - (C) Relative efficiency
 - (D) Specific steam consumption
- 46. In a throttle governing the steam consumption per hour is directly proportional —
 - (A) B.H.P. of the engine
 - (B) I.H.P. of the engine
 - (C) F.H.P. of the engine
 - (D) None of these
- The function of the governor in steam engine is to —
 - (A) Reverse its direction
 - (B) Control the speed
 - (C) Absorb the excess energy produced during a cycle
 - (D) Stop the engine
- The thermal efficiency of steam engine is—
 - (A) More than steam turbine
 - (B) Less than steam turbine
 - (C) Equal to steam turbine
 - (D) Unpredictable
- 49. In uniflow steam engine the type of valve used for controlling the steam is—
 - (A) D.Slide valve
- (B) Drop valve
- (C) Corliss valve
- (D) None of these
- 50. In receiver type compound steam engine, the cranks of the two cylinder are placed —
 - (A) 90° to each other
 - (B) 180° to each other
 - (C) 360° to each other
 - (D) 45° to each other
- 51. In woolf type compound steam engine, the phase angle between two cranks is-
 - (A) 90°
- (B) 45°
- (C) 180°
- (D) 120°

- if the compression law followed is—
 - (A) $PV^{1.35} = C$
 - (B) Isothermal PV = C
 - (C) Isentropic $PV^{\gamma} = C$
 - (D) None of these
- 53. For reciprocating air compressor the law of compression desired is isothermal and that may be possible by—
 - (A) Very low speed
 - (B) Very high speed
 - (C) Any speed as speed does not affect the compression law
 - (D) None of these
- 54. Work input to the air compressor with 'n' as index of compression-
 - (A) Increases with increase in the value of
 - (B) Decreases with increase in the value of
 - (C) Remains same whatever the value of 'n'
 - (D) None of these
- With increase in clearance volume, the ideal work of compressing 1kg of air-
 - (A) Increases
- (B) Decreases
- (C) Remains same (D) None of these
- Mechanical efficiency of reciprocating air compressor is expressed as —
 - (A) $\frac{B.P.}{I.P.}$ (B) $\frac{I.P.}{B.P.}$
- (D) $\frac{F.P.}{I.P.}$
- In reciprocating air compressor the method of controlling the quantity of air delivered is done by—
 - (A) Throttle control
 - (B) Blow-off control
 - (C) Clearance control
 - (D) All of the above
- 58. The efficiency of vane type air compressor as compared to roots air compressor for the same pressure ratio is—
 - (A) More
- (B) Less
- (C) Same
- (D) None of these

76	I	Mech. Engg.		
50	In	centrifugal	air	cor

- In centrifugal air compressor the pressure developed depends on —
 - (A) Impeller tip velocity
 - (B) Inlet-temperature
 - (C) Compression index
 - (D) All of the above
- 60. In air compresser installations where are separators generally used ?
 - (A) Before intercooler
 - (B) After intercooler
 - (C) Between aftercooler and receiver
 - (D) None of these
- 61. With an increase in compression ratio the volumetric efficiency of air compressor
 - (A) Decreases
 - (B) Increases
 - (C) Remains unchanged
 - (D) Unpredictable
- 62. Why is intercooling in multistage compressor done?
 - (A) To minimise the work of compression
 - (B) To cool the air at delivery
 - (C) To cool the air during compression
 - (D) None of these
- 63. Why is an aftercooler used?
 - (A) To remove impurities from air
 - (B) To reduce the volume of air
 - (C) To cool the air
 - (D) None of these
- 64. type compressors are used for gas turbines.
 - (A) Sliding vane
- (B) Centrifugal
- (C) Axial flow
- (D) All of the above
- Centrifugal blowers can supply volumes of air at pressures.
 - (A) Large, low
- (B) Large, high
- (C) Small, high
- (D) Small, low
- is a non-positive displacement compressor.
 - (A) Reciprocating compressor
 - (B) Roots blower
 - (C) Axial flow compressor
 - (D) Vane blower

- The performance of reciprocating compressor is compared on the basis of efficiency.
 - (A) Volumetric
- (B) Mechanical
- (C) Overall
- (D) Isothermal
- Minimum work is required to compress the air when compression is—
 - (A) Polytropic
- (B) Adiabatic
- (C) Isothermal
- (D) Any of the above
- 69. Which of the following is the most-efficient method of compressing air ?
 - (A) Adiabatically
- (B) Isothermally
- (C) Isentropically
- (D) Polytropically
- For which of the following Euler's equation is applicable—
 - (A) Axial compressor
 - (B) Centrifugal compressor
 - (C) Pumps
 - (D) All of the above
- The ratio of indicated power to shaft power is known as efficiency.
 - (A) Adiabatic
- (B) Mechanical
- (C) Isothermal
- (D) Volumetric
- 72. In a compressor the clearance volume should be—
 - (A) As small as possible
 - (B) As large as possible
 - (C) About 25% of swept volume
 - (D) About 80% of swept volume
- Rotary compressor is suited for quantity of air at pressure.
 - (A) Large, low
- (B) Small, low
- (C) Same, high
- (D) Large, high
- 74. At high altitude a compressor will draw—
 - (A) Less power
- (B) More power
- (C) Same power
- (D) None of these
- 75. The volumetric efficiency of compressor with in compression ratio.
 - (A) Decreases, increases
 - (B) Increases, increases
 - (C) Decreases, decreases
 - (D) Increases, decreases
- is used to drive a rotary compressor.
 - (A) Engine
- (B) Electric motor
- (C) Air motor
- (D) Either A or B

77.	is a positive displacement compressor.	86. A closed cycle gas turbine consists of a—
	(A) Axial flow compressor	(A) Cooling chamber
	(B) Centrifugal flow compressor (C) Roots blower	(B) Heating chamber
	(D) None of these	(C) Compressor
70	` '	(D) All of the above
78.	Which of the following compressors is mostly used for supercharging I.C. engines? (A) Reciprocating compressor (B) Axial flow compressor (C) Roots blower	87. For a gas turbine the air-fuel ratio is generally kept closer to— (A) 10:1 (B) 25:1 (C) 45:1 (D) 60:1
	(D) Radial flow compressor	 limits the maximum temperature in a gas turbine cycle.
79.	Reciprocating compressors are employed to compress air upto a pressure of bar. (A) 20 (B) 40	(A) Turbine blade material (B) Efficiency of combustion
	(C) 80 (D) More than 100	(C) Quality of fuel
80.	In a centrifugal compressor what is the usual	(D) None of these
	value of power input factor ?	89 is used as a fuel in gas turbine.
	(A) 1·0 (B) 1·04 (C) 1·2	(A) Liquid benzene (B) Powdered coal
	(C) 1·2 (D) 1·3	(C) Producer gas (D) Any of the above
81.	is the ratio of isentropic work to Euler work, in a rotary bladed compressor.	The ideal constant pressure gas turbine works on cycle.
	(A) Degree of reaction	(A) Brayton
	(B) Slip factor	(B) Joule
	(C) Work factor (D) Pressure coefficient	(C) Both (A) and (B)
	(D) Pressure coefficient	(D) None of these
82.	An air compressor may be controlled by control.	 In gas turbines the pressure ratio is the ratio of—
	(A) Clearance (B) Blow-off	 (A) Exhaust pressure to inlet pressure
	(C) Throttle (D) Any of the above	(B) Pressure across turbines
83.	With the decrease in the valve of index n the volumetric efficiency—	(C) Highest pressure to exhaust pressure(D) None of these
	(A) Decreases (B) Increases	92 is suitable for space travel.
	(C) Remains unaffected	(A) Turbo propeller (B) Turbo jet
	(D) None of these	(C) Rocket (D) All of the above
84.	A closed cycle gas turbine works on cycle. (A) Rankine (B) Joule	93. Which of the following properties is most important for material used for gas turbine blade?
	(C) Atkinson (D) Brayton	(A) Bulk modulus (B) Fatigue
85.	In gas turbine high air fuel ratio—	(C) Toughness (D) Creep
,	(A) Reduces exhaust temperature	94. In a gas turbine the compression ratio is of the
	(B) Increases power output	order of—
	(C) Improves thermal efficiency	(A) 2:1 (B) 4:1
	(D) None of the above	(C) 8:1 (D) 13:1

78	Mech. Engg						
95.		aircraft, the	e air velocity in a		(C) In the divergen	t portion of the nozzle	
	rocket is—		_		(D) In the converge	ent portion of the nozzle	
	(A) Zero	` '	Less	105.	The steam leaves the	e nozzle at a—	
	(C) Same	(D)	More		(A) High pressure a	and high velocity	
96.	Compared to	turbo jet, a t	turbo propeller gas		(B) Low pressure a	nd low velocity	
	as the ad	ditional featu	ire.		(C) High pressure a	and low velocity	
	(A) Diffuser	(B)	Intercooler		(D) Low pressure a	nd high velocity	
	(C) Propeller	(D)	None of these	106.	The difference of sa	upersaturated temperature	
97.			the maximum turbo jet is attained.		and saturation temp known as—	erature at the pressure is	
	(A) 400 Km/l	•	1000 Km/h		(A) Degree of supe	rheat	
	(C) 1500 Km	` '	2400 Km/h		(B) Degree of under	ercooling	
					(C) Degree of supe	rsaturation	
98.	The overall efficiency of a rocket is maximum when aircraft velocity compared to jet velocity is— (A) Half (B) Two-third				(D) None of these		
				107.	When the back pressure of a nozzle is below		
					the designed value of pressure at exit o		
		, ,			nozzle, the nozzle is		
	(C) One-four		Double		(A) Chocked	(B) Under damping	
99.	* A	gas turbin	e is employed in			(D) None of these	
	aircraft units.	(D)	C1 1	106.	reaction is—	tion turbine, the degree of	
	(A) Open		Closed		(A) 25%	(B) 35%	
	(C) Semi-clos	sed (D)	None of these		(C) 45%	(D) 50%	
100.			efficiency of the	109.	, ,	ine, when the degree of	
	following orde				reaction is zero, the	•	
	(A) 20%	(B)			(A) No heat drop in	the fixed blade	
101	(C) 60%	(D)			(B) No heat drop in	the moving blade	
101.	A condenser in	_	_		(C) Maximum heat	drop in the fixed blade	
	(A) Increases	-			(D) Maximum heat	drop in the moving blade	
	(C) Reduces	_	of exhaust steam	110.	The maximum effic	iency of a reaction turbine	
		_	c or steam		is—		
102	(D) All of the		lating water flows		(A) $\frac{2 \sin^2 \alpha}{1 + \sin^2 \alpha}$	(B) $\frac{1 + \cos^2 \alpha}{2 \cos^2 \alpha}$	
102.			irrounded by steam		$1 + \sin^2\alpha$	2 cos²α	
	is known as—		, , , , , , , , , , , , , , , , , , , ,		(C) $\frac{1 + \sin^2 \alpha}{2 \sin^2 \alpha}$	(D) $\frac{2\cos^2\alpha}{1+\cos^2\alpha}$	
	(A) Surface o	ondenser		111			
	(B) Jet conde	nser		111.	to—	erning in steam turbine is	
	(C) Barometr		•		(A) Maintain the sp	eed of the turbine	
	(D) Evaporati				(B) Reduce the effe		
103.			o for initially dry			m and improve its quality	
	saturated steam		, , ,			ance against end thrust	
	(A) 0·546	(B)	0.582	112.	Curtis turbine is a-	*	
	(C) 0·528	(D)	0.577		(A) Pressure compo	ounded turbine	
104.	The flow of ste	eam is supers	sonic—		_	ty compounded turbine	
	(A) At the thr	roat of the no	zzle		(C) Velocity comp		
	(B) At the ent	trance of the	nozzle		(D) None of these		

113.	The ratio of work				16. (B)	17.(A)	18.(B)	19. (A)	20. (D)
	of steam to the energy supplied to the blades				21. (C)	22. (C)	23.(B)	24.(B)	25.(C)
	is called—				26. (B)	27. (B)	28.(B)	29. (A)	30.(C)
	(A) Mechanical		,		31. (C)	32. (B)	33. (A)	34. (B)	35.(B)
	(B) Nozzle effic(C) Diagram or l	•	ficiency		36. (A)	37. (C)	38. (B)	39. (C)	40.(B)
	(D) Gross or stag	-	•						
114	The compounding	-	•	in order	41. (C)	42. (C)	43.(B)	44. (B)	45. (C)
114.	to—	g or turbii	ics is doin	in order	46. (B)	47. (B)	48.(B)	49. (D)	50. (A)
	(A) Improve effi	ciency			51. (C)	52. (B)	53. (A)	54. (A)	55.(C)
	(B) Reduce exit	•			56. (B)	57. (D)	58. (A)	59. (D)	60.(C)
	(C) Reduce spee		,		61. (A)	62. (C)	63.(C)	64.(C)	65. (A)
	(D) All of these				66. (C)	67.(D)	68.(B)	69.(B)	70. (D)
115. De-Laval turbine is a-					71. (B)	72.(A)	73. (A)	74. (A)	75. (D)
	(A) Impulse read	tion turbi	ne		76. (D)	77. (C)	78. (D)	79. (D)	80.(B)
	(B) Multi-rotor i	mpulse tu	ırbine		81. (D)	82.(D)	83. (A)	84. (B)	85. (A)
	(C) Single rotor	impulse t	urbine		86. (D)	87. (D)	88. (A)	89. (D)	90. (A)
	(D) None of thes	se			91. (C)	92. (C)	93. (D)	94.(C)	95. (A)
	Aı	nswers	;		96. (C)	97. (D)	98. (A)	99. (A)	100.(C)
1	1.(A) 2.(A)	3.(C)	4.(B)	5.(B)	101.(D)	102.(A)	103. (D)	104. (C)	105. (D)
	6. (B) 7. (A)	8. (A)	9. (D)	10.(B)	106. (B)	107. (B)	108. (D)	109.(B)	110. (D)
	l.(A) 12.(D)	13.(B)	14. (C)	15.(B)	` '	112. (B)			115.(C)

8

HEAT TRANSFER, REFRIGERATION AND AIR-CONDITIONING

Heat

There are three methods of transfer of Heat -

- (i) Conduction—Conduction is the flow of heat through an unequally heated body from places of higher temperature to those of lower temperature without actual transference of particles constituting the body. Almost all solids are good conductors of heat.
- (ii) Convection—It is the process by which heat is transferred from one place to another in a medium by the movement of particles of the medium. Convection occurs in fluids (liquid and gases).
- (iii) Radiation—It is the process by which heat is transferred from one place to another without the agency of any intervening medium. Heat from the sun comes on the earth by radiation.

Steady State

When the temperature of various points of the bar is changing the state is said as variable state. After some time a state is reached when the temperature of each cross-section becomes steady. This state is known as steady state.

Newton's Law of Cooling

According to this law, the rate of loss of heat of a body is directly proportional to the temperature difference between the body and the surroundings.

$$ie., \quad \frac{dQ}{dt} = -k(T - T_0)$$

Where T = Temperature of the body

and T_0 = Temperature of surrounding

This law is true for small temperature difference only.

Black Body—A black body is defined as a body which completely absorbs all the heat radiations falling on it without reflecting and transmitting any of it. When such a body is heated it emits radiations of all wavelengths depending upon the temperature of black body.

Stefan's Law

According to Stefan's law, the total radiant energy E emitted per second from unit surface area of a black body is proportional to the fourth power of its absolute temperature T. Thus

$$E \propto T^4$$

$$E = \sigma T^4$$

Where o is known as Stefan's constant

Emissive Power

The emissive power of a body at a given temperature and for particular wavelength is defined as the radiant energy emitted per second by unit surface area of the body per unit wavelength range.

Absorptive Power

The absorptive power of a body at a given temperature and for a particular wavelength is defined as the radiant energy absorbed per second by unit surface area of the body to the total energy falling per unit time on the same area.

Kirchhoff's Law

This law states that the ratio of the emissive power to the absorptive power for radiation of a given wavelength is the same for all bodies at the same temperature and is equal to the emissive power of a perfectly black body at that temperature.

Wien's Displacement Law

The wave-length corresponding to maximum energy is inversely proportional to the Kelvin temperature and is given by

$$\lambda_{\rm m} \propto \frac{1}{\rm T}$$

 $\lambda_m T = Constant$

and Constant = 2.93×10^{-3} mk

Solar Constant

Solar constant is defined as the amount of energy received from the sun by the earth per minute per cm² of surface placed normally to the sun's rays at mean distance of the earth from the sun in the absence of atmosphere. The value of solar constant is 1.937 cal cm⁻² min⁻¹.

Refrigeration

'Refrigeration' is a science of the producing and maintaining temperature below that of the surrounding atmosphere.

Refrigeration is generally produced in one of the following three ways:

- By melting of a solid
- (ii) By sublimation of a solid
- (iii) By evaporation of a liquid

Elements of Refrigeration System

All refrigeration systems must include atleast four basic units as given below:

- (i) A low temperature thermal 'sink' to which heat will flow from the space to be cooled.
- (ii) Means of extracting energy from the sink, raising the temperature level of this energy and delivering it to a heat receiver.
- (iii) A receiver to which heat will be transferred from the high temperature high pressure
- (iv) Means of reducing of pressure and temperature of the refrigerant as it returns from the receiver to the 'sink'.

Refrigeration Systems

The various refrigeration systems may be enumerated as below:

- (i) Ice refrigeration system
- (ii) Air refrigeration system

- (iii) Vapour compression refrigeration system
- (iv) Vapour absorption refrigeration system
- (v) Special refrigeration system—
 - (a) Absorption refrigeration system
 - (b) Cascade refrigeration system
 - (c) Mixed refrigeration system
 - (d) Vortex tube refrigeration system
 - (e) Thermoelectric refrigeration system
 - (f) Steam jet refrigeration system

Aircraft Refrigerating Systems

The following air-refrigeration systems are used in aeroplanes.

- Simple cooling system
- (ii) Boot strap system
- (iii) Regenerative cooling system

These processes are completed in one cycle

- Compression
- (ii) Condensation
- (iii) Expansion
- (iv) Vaporisation

Desirable Properties of an Ideal Refrigeration

An ideal refrigerant should possess the following properties:

- (A) Thermodynamic Properties—
 - Low boiling point
 - (ii) Low freezing point
 - (iii) Positive pressures (but not very high) in condenser and evaporator
 - (iv) High saturation temperature
 - (v) High latent heat of vaporisation
- (B) Chemical Properties—
 - Non-toxicity
 - (ii) Non-flammable and non-explosive
 - (iii) Non-corrosiveness
 - (iv) No effect on the quality of stored (food and other)
 - (v) Non-irritating and odourless
- (C) Physical Properties—
 - Low specific volume of vapour
 - (ii) Low specific heat
 - (iii) High thermal conductivity

- (iv) Low viscosity
- (v) High electrical insulation
- (D) Other Properties—
 - (i) Ease of leakage location
 - (ii) Availability and low cost
 - (iii) Ease handling
 - (iv) High C.D.P.
 - (v) Low pressure consumption per tonne of refrigeration
 - (vi) Low pressure ratio and pressure difference

Refrigeration Components

Important refrigeration components are:

- (A) Compressors—
 - Reciprocating compressors
 - (ii) Centrifugal compressors
 - (iii) Rotary compressors
 - (iv) Screw compressors
- (B) Condensers—
 - Air cooled condensers
 - (ii) Water cooled condesers
 - (iii) Evaporative condensers
- (C) Evaporators-
 - Flooded type evaporators
 - (ii) Dry or direct expansion type evaporators on the basis of operating conditions:
 - (i) Bare-tube evaporator
 - (ii) Plate-surface evaporator
 - (iii) Fixed-tube evaporator

Refrigeration Controls

There are six basic types of refrigerant flow controls—

- (i) Hand expansion valve
- (ii) Automatic expansion valve
- (iii) Thermostatic expansion valve
- (iv) Capillary tube
- (v) Low-side float
- (vi) High-side float

Air-Conditioning

Air-conditioning is the simultaneous control of temperature, humidity, motion and purity of the atmosphere in a confined space.

Human Comfort

Thermodynamically a human body feels comfortable when the heat produced by the metabolism of human body is equal to the sum of heat dissipated to the surroundings and the heat stored in the human body by raising the temperature of body tissues.

The following factors affect human comfort

- (i) Temperature
- (ii) Humidity
- (iii) Air motion
- (iv) Air purity

The main parts of the equipment in the air-conditioning cycle are

- (i) Fan
- (ii) Supply ducts
- (iii) Supply outlets
- (iv) Space to be conditioned
- (v) Return outlets
- (vi) Return ducts
- (vii) Filter
- (viii) Heating chamber
- (ix) Cooling coil

Air-conditioning Systems

The air-conditioning systems are mainly classified as:

- (i) Central systems
- (ii) Zoned systems
- (iii) Unitary systems
- (iv) Unitary-central system

Another method of classification of airconditioning system is as follows

- (i) Single air systems
- (ii) Dual air systems
- (iii) Primary air systems
- (iv) Unit systems
- (v) Panel systems

Air Distribution

- (A) Air handling system comprises -
 - Air distribution system
 - (ii) Duct system
 - (iii) Fan

(B) Outlets may be classified as follows— (D) Air distribution systems may be divided Grille outlets (ii) Slot diffused outlets Ejector system (i) (iii) Ceiling diffuser outlets (ii) Downward system (iv) Perforated ceiling panels (iii) Upward system (C) The supply ducts may be arranged in the (E) Three methods of sizing the ducts are following ways— Velocity reduction method Loop perimeter ducts system (ii) Equal friction method (ii) Downward system (iii) Upward (iii) Static regain method OBJECTIVE QUESTIONS In which of the following cases molecular The thermal conductivity is expressed as transmission of heat is smallest? (A) W/mk (B) W/m²k (A) Solids (B) Alloys (C) W/hmk (D) W/h²m²k (D) Liquids (C) Gases The overall coefficient of heat transfer is used Due to which of the following reasons cork is in the problems of a good insulator? (A) Radiation (A) It is porous (B) Conduction (B) Its density is low (C) Convection (C) It can be powdered (D) Conduction and convection (D) All of the above Thermal conductivity of non-metallic amoris expected to have highest thermal phous solid with decrease in temperaconductivity. ture. (B) Melting ice (A) Water (A) Decreases (D) Steam (C) Solid ice (B) Increases 11. The temperature variation with time, in the (C) Remains constant lumped parameter model is— (B) Sinusoidal (A) Exponential (D) Unpredictable (C) Cubic (D) Linear Heat is transfer takes place as per law of 12. number is relevant, is transient heat thermodynamics. condition. (A) Zeroth (B) First (A) Reynolds (B) Fourier (D) None of these (C) Second (C) Grashoff (D) Prandtl Heat closely related with 13. number is generally associated with (A) Energy (B) Entropy natural convection heat transfer. (C) Enthalpy (D) Temperature (A) Prandtl (B) Weaker 6. has least value of conductivity. (C) Nusselt (D) Grashoff (B) Air (A) Rubber

(C) Water

conductivity.

(A) Lead

(C) Steel

(D) Glass

(B) Copper

(D) Aluminium

maximum value of thermal

14. is not the assumption in Fourier's

(A) Constant temperature difference

(B) Uniform area of cross-section

equation of heat conduction.

(D) Homogeneous substance

(C) Steady heat flow

84	Mech. Engg.		
15.	A substance above cas—	ritical temperature exists	 The intensity of solar radiation on earth is KW/m².
	(A) Liquid	(B) Solid	(A) 1 (B) 3
	(C) Gas	(D) Wet vapour	(C) 6 (D) 8
16.	6. Shape of an ideal thermometer should be (A) Cubical (B) Rectangular		In flow maximum heat transfer rate can be expected.
	(C) Spherical	(D) Cylindrical	(A) Laminar (B) Turbulent (C) Counter current (D) None of these
17.	Planck's law of rad radiation.	iation is application to	27. The emissivity of a grey body is— (A) 0.5 (B) 1
	(A) Monochromatic	(B) Thermal	(C) Less than 1 (D) More than 1
	(C) Temperature	(D) None of the above	28. For gases prandtl number is—
18.		e emissivity of a white gths and temperatures is	(A) Near unity (B) Between 5 to 50
	(A) Zero	(B) 0·1 to 0·4	(C) Between 60 to 100
	(C) 0·6	(D) 1	(D) Between 150 to 300
19.	A body reflects on it.	entire radiation incident	29. In ablation heat transfer method is used.(A) Nuclear war heat(B) Satellites
	(A) Trasparent	(B) Black	(C) Rockets
	(C) Gray	(D) White	(D) None of these
20.	conductivity of rubbe	ed to find the thermal	30 number can be used for convective heat transfer.
	(A) Searle's		(A) Mach (B) Froude
	(B) Lee's disc		(C) Nusselt (D) None of these
	(C) Cylindrical shell	l	
	•		31. The ratio of thermal conductivity to that of
	(D) Laby and Hercu		water is nearly.
21.	•	S	water is nearly. (A) 2 (B) 3
21.	(D) Laby and Hercu	S	water is nearly. (A) 2 (B) 3 (C) 4 (D) 6
	(D) Laby and Hercu rays have least (A) Infrared (C) Radio	s wavelength. (B) Ultraviolet (D) Cosmic	water is nearly. (A) 2 (B) 3
	(D) Laby and Hercu rays have least (A) Infrared (C) Radio	s wavelength. (B) Ultraviolet	water is nearly. (A) 2 (B) 3 (C) 4 (D) 6 32. In air preheater for boiler, heat is least transferred by— (A) Radiation (B) Conduction
	(D) Laby and Hercu rays have least(A) Infrared(C) RadioDropwise condensa	s wavelength. (B) Ultraviolet (D) Cosmic	water is nearly. (A) 2 (B) 3 (C) 4 (D) 6 32. In air preheater for boiler, heat is least transferred by— (A) Radiation (B) Conduction (C) Convection (D) Both
	(D) Laby and Hercu rays have least(A) Infrared(C) RadioDropwise condensa surface.	wavelength. (B) Ultraviolet (D) Cosmic tion occurs on a	water is nearly. (A) 2 (B) 3 (C) 4 (D) 6 32. In air preheater for boiler, heat is least transferred by— (A) Radiation (B) Conduction (C) Convection (D) Both 33. In which of the following cases non-isotropic
22.	 (D) Laby and Hercu rays have least (A) Infrared (C) Radio Dropwise condensa surface. (A) Oily (C) Glazed Least value of present the present condensation. 	wavelength. (B) Ultraviolet (D) Cosmic tion occurs on a (B) Smooth (D) Coated andtl number can be	water is nearly. (A) 2 (B) 3 (C) 4 (D) 6 32. In air preheater for boiler, heat is least transferred by— (A) Radiation (B) Conduction (C) Convection (D) Both 33. In which of the following cases non-isotropic conductivity is exhibited? (A) Lead (B) Wood
22.	 (D) Laby and Hercu rays have least (A) Infrared (C) Radio Dropwise condensa surface. (A) Oily (C) Glazed 	wavelength. (B) Ultraviolet (D) Cosmic tion occurs on a (B) Smooth (D) Coated andtl number can be	water is nearly. (A) 2 (B) 3 (C) 4 (D) 6 32. In air preheater for boiler, heat is least transferred by— (A) Radiation (B) Conduction (C) Convection (D) Both 33. In which of the following cases non-isotropic conductivity is exhibited? (A) Lead (B) Wood (C) Copper (D) Brass
22.	 (D) Laby and Hercu rays have least (A) Infrared (C) Radio Dropwise condensa surface. (A) Oily (C) Glazed Least value of prexpected in case of— 	wavelength. (B) Ultraviolet (D) Cosmic tion occurs on a (B) Smooth (D) Coated andtl number can be (B) Liquid metals	water is nearly. (A) 2 (B) 3 (C) 4 (D) 6 32. In air preheater for boiler, heat is least transferred by— (A) Radiation (B) Conduction (C) Convection (D) Both 33. In which of the following cases non-isotropic conductivity is exhibited? (A) Lead (B) Wood (C) Copper (D) Brass 34 is suitable for low temperature
22.	 (D) Laby and Hercu rays have least (A) Infrared (C) Radio Dropwise condensa surface. (A) Oily (C) Glazed Least value of prexpected in case of— (A) Water (C) Salt solution 	wavelength. (B) Ultraviolet (D) Cosmic tion occurs on a (B) Smooth (D) Coated andtl number can be (B) Liquid metals (D) Sugar soluble corator is suitable for	water is nearly. (A) 2 (B) 3 (C) 4 (D) 6 32. In air preheater for boiler, heat is least transferred by— (A) Radiation (B) Conduction (C) Convection (D) Both 33. In which of the following cases non-isotropic conductivity is exhibited? (A) Lead (B) Wood (C) Copper (D) Brass
22.	 (D) Laby and Hercu rays have least (A) Infrared (C) Radio Dropwise condensa surface. (A) Oily (C) Glazed Least value of prexpected in case of— (A) Water (C) Salt solution Agitated film evalue concentrating limits 	wavelength. (B) Ultraviolet (D) Cosmic tion occurs on a (B) Smooth (D) Coated andtl number can be (B) Liquid metals (D) Sugar soluble corator is suitable for	water is nearly. (A) 2 (B) 3 (C) 4 (D) 6 32. In air preheater for boiler, heat is least transferred by— (A) Radiation (B) Conduction (C) Convection (D) Both 33. In which of the following cases non-isotropic conductivity is exhibited? (A) Lead (B) Wood (C) Copper (D) Brass 34 is suitable for low temperature applications. (A) Fused alumina bricks

- A dimensionless number which is the ratio of kinematic viscosity to thermal diffusivity is known as number.
 - (A) Grashoff
- (B) Prandtl
- (C) Mach
- (D) Nusselt
- Fog is formed due to—
 - (A) Humidity
 - (B) Low pressure
 - (C) Temperature fall of atmosphere
 - (D) All of the above
- 37. Which of the following is a very good insulator?
 - (A) Saw dust
 - (B) A hard wood board
 - (C) An asbestos sheet
 - (D) A porcelain sheet
- Thermal conductivity of liquids can be determined by—
 - (A) Searl's method
 - (B) Guarded plate method
 - (C) Laby and Hercas method
 - (D) None of the above
- 39. is likely to have highest thermal conductivity.
 - (A) Boiling water
- (B) Steam
- (C) Solid ice
- (D) Rain water
- 40. body transmits all the radiations falling on it.
 - (A) Transparent
- (B) Grey
- (C) Black
- (D) White
- A radiation shield should have—
 - (A) High emissivity
 - (B) Low reflectivity
 - (C) High reflectivity
 - (D) None of these
- 42. are generally diathermanous.
 - (A) Gases
- (B) Liquids
- (C) Solids
- (D) All of the above
- The reflectance of a black body is—
 - (A) Zero
- (B) Less than 1.0
- (C) 1·0
- (D) Infinity

- 44. Grashoff number has significant role in heat transfer by
 - (A) Conduction
 - (B) Radiation
 - (C) Natural convection
 - (D) Forced convection
- 45. Temperature of steam around 550°C can be measured by
 - (A) Thermopile
- (B) Thermocouple
- (C) Thermometer
- (D) Radiation
- 46. Rating of a domestic refrigerator is of the order of —
 - (A) 0.1 to 0.3 tonne (B) 2 tonnes
 - (C) 5 tonnes
- (D) 10 tonnes
- 47. The C.O.P. of a heat pump for the same operating temperature limits, equals—
 - (A) (C.O.P.)_{ref}
 - (B) $1 + (C.O.P.)_{ref}$
 - (C) $(C.O.P.)_{ref} 1$
 - (D) $\frac{1}{(\text{C.O.P.})_{\text{ref}}}$
- 48. Air-refrigerator works on cycle.
 - (A) Rankine
 - (B) Bell-coleman
 - (C) Reversed Carnot cycle
 - (D) Both (B) and (C)
- Bell-coleman cycle is a reversed cycle.
 - (A) Rankine
- (B) Otto
- (C) Joule
- (D) Carnot
- 50. The refrigerating capacity of 165 domestic refrigerator is approximately equal to—
 - (A) 0·1 tonne
- (B) 1.15 tonnes
- (C) 5 tonnes
- (D) 8 tonnes
- The Bell-coleman refrigeration cycle uses as the working fluid.
 - (A) Air
- (B) CO₂
- (C) H₂
- (D) None of these
- 52. Air-refrigeration cycle is used in-
 - (A) Domestic refrigerators
 - (B) Gas liquification
 - (C) Commercial refrigerators
 - (D) All of the above

86 Mech. Engg.	
 53 cycle uses air as the refrigerant. (A) Stirling (B) Ericsson (C) Bell-coleman (D) Carnot 54. In a refrigeration cycle the heat is rejected by refrigerant at— (A) Condenser (B) Evaporator (C) Compressor (D) Expansion value 	 61. A device designed to remove moisture from a refrigerant is called— (A) Dehumidifier (B) Solenoid (C) Expansion valve (D) Drier 62 is usually the costliest item in a refrigeration system.
 55. In a refrigeration cycle the flow of refrigerant is controlled by— (A) Compressor (B) Evaporator (C) Expansion value (D) Condenser 	 (A) Compressor (B) Condenser (C) Expansion valve (D) Evaporator 63. The vapour pressure of refrigerant should be atmospheric pressure.
 56. Which part of the vapour compression refrigeration cycle, produces the refrigeration effect? (A) Compressor (B) Condenser (C) Evaporator (D) None of these 	64. At the back of domestic refrigerator, the bank of tubes are— (A) Evaporator tubes
 57. In the vapour compression refrigeration cycle, the refrigerant is generally in the form of fairly wet vapour at entry to— (A) Compressor (B) Condenser (C) Expansion valve (D) Evaporator 	(B) Condenser tubes (C) Refrigerant cooling tubes (D) Capillary tubes 65. Which refrigerant is used in a vapour absorption refrigerator? (A) Freon (B) Sulphur dioxide (C) Water (D) Acqua-ammonia
 58. In a refrigeration cycle, the superheating C.O.P. (A) Decreases (B) Does not change (C) Increases (D) None of these 	 66. In a vapour compression system the temperature of ammonia after compression is in the range— (A) 15 to 25°C (B) 25 to 50°C (C) 50 to 70°C (D) 70 to 110°C 67. Freon group of refrigerants are— (A) Toxic
 59. In a refrigeration cycle oil separator is installed between— (A) Condenser and expansion valve (B) Compressor and condenser (C) Condenser and evaporator (D) None of these 	
 60. In a small refregerator a capillary tube is used to serve the purpose of— (A) Evaporator (B) Thermostat (C) Condenser (D) Expansion valve 	(C) Temperature (D) Total heat 69 has the minimum freezing point. (A) Freon-22 (B) Freon-12 (C) Carbon-dioxide (D) Ammonia

70.	A refrigerant with highest critical pressure is	78. In vapour absorption system lithium bromide is used as—
	(A) Carbon-dioxide	(A) Lubricant
	(B) Ammonia	(B) Cooling substance
	(C) Freon-11	(C) Absorbent
	(D) Freon-22	(D) Refrigerant
71.	is the refrigerant widely used in domestic refrigerators. (A) Carbon dioxide (B) Air (C) Freon-12 (D) Ammonia	•
72.	is the refrigerant commonly used in co- mmercial ice plants.	(A) Sulphur dioxide
	(A) Carbon dioxide	(B) Ammonia (C) Methyl chloride
	(B) Air	(D) None of these
	(C) Ammonia	
	(D) Freon-12	 In brine is always used as a secondary refrigerant.
73.	The refrigerant used in steam jet refrigeration is—	(A) Milk chilling plant
	(A) Brine (B) Water	(B) Ice plant
	(C) Ammonia (D) Freon-12	(C) Cold storage
74	Which of the following refrigerants has the	(D) None of these
, 4.	lowest boiling points ?	 s2is not a desirable property of good insulating material.
	(A) Freon-12	(A) Low initial cost
	(B) Carbon dioxide (C) Ammonia	(B) Light weight
	(C) Ammonia (D) Sulpher dioxide	(C) Odourless
75		(D) High heat conductivity
15.	The brine is an aqeous solution of in water.	83. In an unsaturated air the state of a vapour is—
	(A) Magnesium sulphate	(A) Wet (B) Superheated
	(B) Sodium chloride	(C) Saturated (D) Unsaturated
	(C) Calcium carbonate (D) None of these	84. During sensible heating of moist air,
76.	The C.O.P. of a domestic refrigerator in com-	enthalpy— (A) Increases
, 0.	parison to domestic air-conditioner will be—	(B) Decreases
	(A) Less (B) Same	(C) Remains constant
	(C) More (D) None	(D) None of these
77.	An electrolux refrigerator works on	85. During sensible cooling, wet bulb tempera-
	system. (A) Vortex tube	ture—
	(B) Absorption refrigeration	(A) Decreases (B) Increases
	(C) Vapour compression	(C) Remains constant
	(D) None of these	(D) None of these

88	Mech. Engg.		
86.	An air washer can work as a— (A) Filter only	94.	As warm air cools, its relative humidity
	(B) Humidifier only		(A) Decreases
1	(C) Dehumidifier only		(B) Increases
	(D) All of the above		(C) Remains unchanged
87.	The relative humidity during sensible heat-		(D) Unpredictable
	ing — (A) Can increase or decrease	95.	During dehumidification process of removing moisture dry bulb temperature—
	(B) Increases		(A) Decreases
	(C) Decreases		(B) Increases
	(D) Remains constant		(C) Remains constant
88.	The vapour pressure, during sensible heating of moist air—		(D) Unpredictable
	(A) Increases	96.	The wet bulb temperature, at 100 per cent
	(B) Decreases		relative humidity is dew point.
	(C) Remains constant		(A) Less than (B) Same as
	(D) None of these		(C) More than (D) None of these
89.	The relative humidity, during heating and humidification—	97.	In spray humidification process, the dry bulb temperature—
	(A) Increases		(A) Decreases
	(B) Decreases		(B) Remains same
	(C) May increase or decrease		(C) Increases
	(D) Remains constant		(D) None of these
90.	The relative humidity during cooling and dehumidification of moist air—	98.	The wet bulb temperature during evaporative cooling process—
	(A) Increases		(A) Decreases
	(B) Decreases		(B) Remains constant
	(C) Can increase or decrease		(C) Increases
	(D) Remains constant		(D) Unpredictable
91.	The wet bulb temperature is a measure of humidity.	99.	The wet bulb temperature during sensible cooling process—
	(A) Relative (B) Absolute		(A) Decreases (B) Remains same
	(C) Specific (D) None of these		(C) Increases (D) Unpredictable
92.	The dry bulb temperature during heating and dehumidification	100.	is a functional or decorative covering for an outlet or intake.
	(A) Decreases		(A) Register (B) Grille
	(B) Increases		(C) Diffuser (D) None of these
	(C) Remains constant	101	
	(D) None of these	101.	The thermal conductivity of solid metals with rise in temperature—
93.	The dehumidification process, on the		(A) Increases
	psychrometric chart is shown by —		(B) Decreases
	(A) Curved line (B) Vertical line		(C) Remains same
	(C) Horizontal line (D) Inclined line		(D) None of these

- 102. The process of heat transfer from one particle 109. The temperature of air recorded by a therof the body to another is called conduction, when the particles of the body-
 - (A) Do not move actually
 - (B) Move actually
 - (C) Affect the intervening medium
 - (D) Does not affect the intervening medium
- 103. For summer air conditioning the relative humidity should not be less than—
 - (A) 40%
- (B) 60%
- (C) 70%
- (D) 95%
- 104. For winter air conditioning the relative humidity should not be more than—
 - (A) 30%
- (B) 40%
- (C) 75%
- (D) 90%
- 105. The conditioned air supplied to the room have the capacity to take up-
 - (A) Room sensible heat load only
 - (B) Room latent heat load only
 - (C) Both room sensible heat and latent heat loads
 - (D) None of these
- The difference between dry bulb temperature and wet bulb temperature, is called—
 - (A) Dew point depression
 - (B) Dry bulb depression
 - (C) Degree of saturation
 - (D) Wet bulb depression
- 107. The process generally used in winter air conditioning to warm and humidify the air, is called—
 - (A) Humidification
 - (B) Heating and humidification
 - (C) Cooling and dehumidification
 - (D) Dehumidification
- 108. A mixture of dry air and water vapour, when the air has diffused the maximum amount of water vapour into it, is called-
 - (A) Dry air
 - (B) Saturated air
 - (C) Specific humidity
 - (D) Moist air

- mometer, when it is not affected by the moisture present in it, is called—
 - (A) Dry bulb temperature
 - (B) Dew point temperature
 - (C) Wet bulb temperature
 - (D) None of these
- In a vapour compression system, the condition of refrigerant before entering the compressor
 - (A) Wet vapour
 - (B) Saturated liquid
 - (C) Dry saturated liquid
 - (D) Superheated vapour
- In ammonia hydrogen refrigerator—
 - (A) Ammonia is absorbed in winter
 - (B) Ammonia evaporates in hydrogen
 - (C) Hydrogen evaporates in ammonia
 - (D) Ammonia is absorbed in hydrogen
- The boiling point of ammonia is—
 - (A) − 12·5°C
- (B) $-25.5^{\circ}C$
- (C) 33·3°C
- (D) 75·5°C
- Which of the following refrigerant is highly toxic and flammable?
 - (A) Carbon dioxide (B) Freon-12
 - (C) Ammonia
- (D) Sulphur dioxide
- 114. The sub-cooling in a refrigeration cycle—
 - (A) Increases C.O.P.
 - (B) Decreases C.O.P.
 - (C) Does not alter C.O.P.
 - (D) None of these
- The highest temperature during the cycle, in a vapour compression system, occurs after—
 - (A) Condensation
- (B) Expansion
- (C) Evaporation
- (D) Compression

Answers

3. (A) 5. (D) 1. (A) 2.(D) 4.(C) 6. (B) 7. (B) 8. (D) 9.(C) 10.(C) 15.(C) 11. (A) 12. (B) 13. (D) 14. (B) 16. (C) 17.(A) 18. (A) 19. (D) 20.(B) 22.(A) 23.(C) 24. (A) 25. (A) 21. (D)

90 | Mech. Engg.

26. (B)	27. (C)	28. (A)	29.(B)	30.(C)	71. (C)	72. (C)	73.(B)	74.(B)	75.(B)
31. (C)	32.(A)	33.(B)	34. (D)	35. (A)	76. (A)	77. (B)	78.(C)	79.(C)	80.(B)
36. (C)	37.(A)	38.(B)	39.(C)	40. (A)	81. (B)	82.(D)	83.(B)	84. (A)	85. (A)
41. (C)	42.(A)	43. (A)	44.(C)	45.(B)	86. (D)	87. (C)	88.(C)	89. (A)	90.(C)
46.(A)	47. (B)	48. (D)	49.(C)	50. (A)	91. (B)	92. (B)	93.(B)	94.(B)	95.(C)
51.(A)	52. (B)	53.(C)	54. (A)	55.(C)	96. (B)	97.(A)	98.(B)	99. (A)	100.(B)
56. (C)	57. (D)	58. (A)	59.(B)	60. (D)	101. (B)	102.(A)	103.(B)	104.(B)	105.(C)
61.(D)	62.(A)	63.(C)	64.(B)	65. (D)	106.(D)	107. (B)	108.(B)	109. (A)	110. (D)
66.(D)	67.(D)	68.(B)	69. (A)	70.(B)	111. (B)	112. (C)	113.(C)	114. (A)	115. (D)

9

THEORY OF MACHINES AND MACHINE DESIGN

Kinematic Link or Element

Each part of a machine which moves relative to some other part, is known as kinematic link or element. A link has two characteristics:

- (i) It should have relative motion.
- (ii) It must be a resistant body.

The links are of the following type:

- (i) Rigid link
- (ii) Flexible link
- (iii) Fluid link

Kinematic Pair

The two links or elements of a machine when in contact with each other are said to form a pair. The kinematic pairs may be classified as follows:

- (A) According to the type of relative motion between the elements—
 - Sliding pair
 - (ii) Turning pair
 - (iii) Rolling pair
 - (iv) Screw pair
 - (v) Spherical pair
- (B) According to the type of contact between the elements—
 - (i) Lower pair
 - (ii) Higher pair
- (C) According to the type of closure—
 - (i) Self closed pair
 - (ii) Force-closed pair

Transmission of Power

The technique of transferring mechanical power from one shaft to another with the help of various means is called transmission of power.

Modes of Transmission of Power

- (A) Belts (Flat belts and V-belts) and ropes
- (B) Chains

- (C) Gears
- (D) Clutches

Belts and ropes are used when the distance between the shaft-centres is large.

Chains are used when the distance between the shaft centres is large and no slip is required.

Gears are employed when the shaft distance is adequately less.

Clutches are used where the shaft distance is adequately less.

Clutches are used where the shafts are coaxial.

Classification of Belts

The general classification of the belts used for transmission of power depends upon: (1) The cross-section of the belt. (2) The material used in the construction of the belt.

- Depending upon the cross-section, the belts can have the following classification—
 - (i) Flat belts
 - (ii) V-belts
 - (iii) Circular belts
- (2) Depending upon the material used for the construction of the belt.
 - (i) Leather belts
 - (ii) Cotton belts
 - (iii) Rubber belts
 - (iv) Metallic belts
 - (v) Steels belts

Belt Drive

A belt's drive consists of the driving and driven pulleys and the belt which is mounted on the pulleys with a certain amount of tension and transmits peripheral force by friction. Belt drives may be—

- Open belt drive
- (ii) Crossed belt drive

Applications of Belt Drives

The main applications of belt drives are:

- To transmit power from low or medium capacity electric motors to operative machines.
- (ii) To transmit power from small prime moves (Internal combustion engines) to electric generators, agricultural and other machinery.

Advantages of Belt drives

- They can transmit motion over medium distances.
- (ii) They give smooth operation (they cushion shocks and are silent).
- (iii) They can operate at high speeds of rotation.
- (iv) Their cost is relatively low.

Disadvantages

- Their considerable overall size, usually several times larger than toothed gearing.
- (ii) The inevitability of some elastic slippling of the belt.
- (iii) The necessity for belt tensioning devices.
- (iv) The necessity to keep oil from getting on the belt.
- (v) The relatively short service life in high speed drives.

Belts are available

- (i) With a narrow rectangular cross-section
 —Flat belts
- (ii) With a trapezoidal cross-section —Vbelts.
- (iii) Round cross-section Round belts. Chiefly used in machinery are flat and V-belts.

Advantages of V-belt are as follows

- No possibility of belt coming out of grooves.
- (2) Particularly suited for small centre distances requiring no idler.
- (3) V-belts may be used for speed ratio as high as 10: 1 and belt speeds upto 2100 m/min.
- (4) Wedging action permits a smaller arc of contact.

- (5) The gripping action results in lower belt tension.
- (6) Power output can be increased by use of multiple belts.
- (7) In case of multiple-belt drive, if one belt fails, the machine does not come to a stop.
- (8) As V-belts are made endless the splicing problem is eliminated.
- (9) V-belts after a more positive drive because of reduced slippage.
- (10) As these can be used over small pulleys, large reductions in speed are possible in a single drive.
- (11) V-belt drive may be inclined at any operating angle, slack side top or bottom.
- (12) Drives are quiet at high speeds.
- (13) The drive is capable of absorbing high shock.
- (14) Standardisation of V-belts results in better initial installation and replacement.

Velocity Ratio

The velocity ratio between the two shafts depends upon the diameters of the respective pulleys. One of the pulleys may be called a driver and the other a follower.

In an open drive both the pulleys rotate in the same direction, whereas in a crossed belt-drive they rotate in opposite direction.

Velocity ratio =
$$\frac{N_2}{N_1} = \left(\frac{100 - S}{99}\right) \left(\frac{d_1 + t}{d_2 + t}\right)$$

Where $d_1 = (2r_1) = \text{diameter of the driver}$ pulley

> $d_2 = (2r_2) = \text{diameter of the driven}$ pulley or follower

N₁ = Revolutions per minute (r.p.m.) of the driver

N₂ = Revolutions per minute (r.p.m.) of the driven

S = Total % age percentage slip between driver and the follower

Gear Trains

A gear is a wheel provided with teeth which meshes with the teeth on another wheel, or on to a rack so as to give positive transmission of motion from one component to another.

Pitch Circle

It is an imaginary circle which would transmit the same motion as the actual gear by pure rolling action.

Addendum Circle—A circle concentric with the pitch circle and bounding the outer ends of the teeth is called an addendum circle.

Addendum—It is the radial distance between the pitch circle and addendum circle.

Dedendum (or roof) Circle—It is a circle concentric with the pitch circle and bounding the bottom of the tooth.

Dedendum—It is the radial distance between the pitch circle and the dedendum circle.

Clearance—The difference between the dedendum and addendum is called as clearance.

Working Depth—It is the sum of the addenda of the two mating gears.

Circular Thickness—The length of arc between the sides of a gear tooth measured on the pitch circle is known as circular thickness.

Tooth Space—It is width of the recess between two adjacent teeth measured along pitch circle.

Back Lash—It is the difference between the tooth space and the tooth thickness.

Face—It is the acting or working surface of the addendum.

Flank—The working face of the dedendum is called the flank.

Top land—It is the surface of the top of the tooth.

Bottom Land—It is the surface of the bottom of the tooth space.

Whole depth—It is the total depth of the tooth space, equal to addendum plus dedendum, also it is equal to the working depth plus clearance.

Tooth Fillet—It is the radius which connects the root circle to the tooth profile.

Circular Pitch—The distance measured along the pitch circle from a point on one tooth to the corresponding point on an adjacent tooth is called circular pitch.

Pitch Diameter—It is the diameter of a pitch circle. It is usually represented by dp or dr for pinion and gear respectively.

Diametral Pitch—Number of teeth on a wheel per unit of its pitch diameter is called the diametral pitch.

Module—It is the reverse of the diametral pitch. Ratio between the pitch diameter and the number of teeth is known as module.

Types of Gears—The different types of gears are:

- Spur gear
- (ii) Helical gear
- (iii) Bevel gear
- (iv) Worm gear
- (v) Rack and pinion

Types of Gear Trains—The combination of gear wheels by means of which motion is transmitted from one shaft to another shaft is called a gear train.

The gear trains are of the following types—

- Simple gear train
- Compound gear train
- Epicycle gear train

Vibrations

Types of Vibrations—

- Free or natural vibrations
- (2) Damped vibrations
- (3) Forced vibrations
- (1) In Free or Natural Vibration, after the initial displacement no external forces, act and motion is maintained by the internal elastic forces.
- (2) In Damped Vibration the energy possessed by the system is gradually dissipated in overcoming internal and external resistances to the motion and the body finally comes to rest.
- (3) In Forced Vibration a periodic disturbing force is applied to the body and the vibration has the same frequency as the applied force.

Fatigue Stress Concentration Factor— Fatigue stress concentration factor is defined as the ratio of endurance limit without stress concentration to endurance limit with stress concentration.

Riveted Joints

Types of Riveted Joints — The riveted joints can mainly be classified in the following two ways-

- Lap joints
- Butt joints

94 | Mech. Engg.

Shafts—Standard sizes of transmission shafts. The standard sizes of transmission shafts are:

- (i) 25 mm to 60 mm with 5 mm steps
- (ii) 60 mm to 110 mm with 10 mm steps
- (iii) 110 mm to 140 mm with 15 mm steps
- (iv) 140 mm to 500 mm with 20 mm steps

Maximum Permissible Working Stresses for Transmission shafts

- (A) For design purpose: The maximum permissible working stresses in tension or compression may be taken as follows—
 - For shafts without allowance for keyways112 MN/m²
 - (ii) For shafts with allowance for keyways 84 MN/m²
- (B) The maximum permissible shear stresses may be taken as follows:
 - (i) For shafts without allowance for keyways 56 MN/m²
 - (ii) For shafts with allowance for keyways 42 MN/m²

Sliding Bearings—Depending upon the thickness of layer of the lubricant between the bearing and journal, the sliding bearing may be classified as follows:

- (A) Thin Film Bearings—These are also boundary lubricated bearings. In such bearing, although lubricant is present, the working surfaces partially contact each other at least part of the time.
- (B) Thick Film Bearings—These are also called hydrodynamic bearings. In these bearings the working surfaces are completely separated from each other by the lubricant.
- (C) Zero Film Bearings—The bearings which operate without any lubricant present are called zero film bearings.
- (D) Hydrostatic or Externally Pressurized Lubricated Bearing—The bearing which can support steady loads without any relative motion between the journal and the bearing are called hydrostatic bearings.

OBJECTIVE QUESTIONS

- The velocity ratio of the belt drive due to slip of the belt—
 - (A) Increases
 - (B) Decreases
 - (C) Remains unchanged
 - (D) Unpredictable
- The Follower is extensively used in air craft engine.
 - (A) Flat faced
- (B) Roller
- (C) Knife edge
- (D) Spherical faced
- When a body is subjected to transverse vibrations stress is induced in the body.
 - (A) Compressive
- (B) Tensile
- (C) Shear
- (D) Any of the above
- 4. Which of the following brakes is used in motor cars?
 - (A) Band brake
 - (B) Internal expanding brake
 - (C) Shoe brake
 - (D) Any of the above

- gear train is used to connect minute hand to hour hand, in a clock mechanism.
 - (A) Simple
- (B) Reversed
- (C) Epicyclic
- (D) Compound
- A point on a link connecting double slider crank chain traces a path.
 - (A) Straight line
- (B) Elliptical
- (C) Hyperbolic
- (D) Parabolic
- 7. drive is not a positive drive.
 - (A) V-belt
- (B) Rope
- (C) Flat-belt
- (D) All of the above
- Throw of a cam can be defined as the maximum distance of the follower from
 circle.
 - (A) Pitch
- (B) Base
- (C) Prime
- (D) None of these
- In a Scott Russel mechanism for straight line, there are movable links.
 - (A) Two
- (B) Three
- (C) Four
- (D) Six

10.	governor is dea		20.		em, if the damping factor	
	(A) Watt	(B) Pickering		is unity, then the syst		
	(C) Hartnell	(D) Porter		(A) Under	(B) Over	
11.	gears are used	l in a differential of an		(C) Critically	(D) Zero	
	automobile.		21.	*	when the sleeve of	
	(A) Double helical	(B) Mitre		a porter governor mo	_	
	(C) Straight level	(D) None of these		(A) Decreases	(B) Increases	
12.	Automobile steering pair.	g gear is an example of	22.	(C) Constant The frictional torque	(D) None of these transmitted by a disc or	
	(A) Rotary	(B) Turning			as that of bearing.	
	(C) Lower	(D) Sliding		(A) Conical pivot		
13.		us of a point on a thread		(B) Flat pivot (C) Trapezoidal piv	ot	
	(A) Involute	(B) Helix		(D) Flat collar		
	(C) Straight line	(D) Circle	23.	governor is use	d to drive a gramophone.	
				(A) Pickering	(B) Hartnell	
14.	exact straight line mo	duces mathematically an otion.	24	(C) Watt	(D) Porter	
	(A) Ackermann	(B) Peaucellier's	24.	is a transmissio	•	
	(C) Watt	(D) None of these		(A) Hydraulic dynar (B) Propy brake dyn		
15.	In case of cam, the pressure angle is kep	maximum value of the tas—		(B) Prony brake dynamometer (C) Rope brake dynamometer (D) None of the above		
	(A) 15°	(B) 20°	25.	Which of the follow	ing is used as a lubricant	
	(C) 30°	(D) 45°	20.	in a rope brake dynar	•	
16.	Hartnell governor	could be classified as		(A) Water		
	type governor.			(B) Oil		
	(A) Dead weight	(B) Pendulum		(C) Grease		
	(C) Centrifugal	(D) None of these		(D) No lubricant is	used	
17.	In order to obtain res profile is—	istance against wear, best	26.	The size of cam depe	end on circle—	
	-	L		(A) Prime	(B) Outer	
	(A) 14° involute stu			(C) Base	(D) Pitch	
	(B) 14° full depth in		27.		engine mechanism the	
	(C) $14\frac{1}{2}^{\circ}$ full depth i	involute		are —		
	(D) 20° rack			(A) 3,3	(B) 4,5	
18.	In a continuous syste	em, the number of degree		(C) 4,6	(D) 5, 5	
	of freedom would be	_	28.	How many links ar	e in peaucellier mecha-	
	(A) One	(B) Two		nism ?		
	(C) Three	(D) Four		(A) Two (C) Eight	(B) Four	
19.	In sugar crushing n	In sugar crushing machinery which of the			(D) Six	
	-	ooth are provided on the	29.	The lead screw of a pair.	lathe with nut forms a	
	(A) Cycloidal	(B) Involute		(A) Turning	(B) Screw	
	(C) Paraboloid	(D) Hyperboloid		(C) Rolling	(D) Sliding	

96	Mech. Engg.	
	For inelastic bodies, the co-efficient of restitution is— (A) One (B) Greater than one (C) Zero (D) None of these	(A) Less than one(B) Zero(C) Greater than one
	The pair is said to be a pair when the elements of the pair are kept in contact by the action of external forces— (A) Self closed (B) Force closed (C) Lower (D) Higher A quaternary joint, in a kinematic chain, is	 (D) None of these 41. When the number of degrees of freedom(n) is equal to the mechanism forms a structure. (A) -1 (B) 1 (C) 2 (D) 0
	equivalent to— (A) One binary joint (B) Two binary joint (C) Three binary joint (D) None of these	 42. The quality of a governor is judged by its— (A) Power (B) Sensitivity (C) Stability (D) All of the above 43. A does not require a flywheel.
33.	A kinematic chain is known as a machanism when of the links is fixed. (A) None (B) One (C) Two (D) All of the above	 (A) Gas turbine (B) Steam engine (C) Power press (D) None of these 44. A rock is a gear of— (A) Infinite module (B) Infinite diameter
34.	A kinematic chain is known as a mechanism when of the links is fixed. (A) None (B) One (C) Two (D) All of the above	 (C) Infinite pitch (D) None of the above 45. Helical gears are subjected to stresses. (A) Bending (B) Torsional shear
35.	A completely constrained motion can be transmitted with links with pin joints. (A) Two (B) Four (C) Five (D) Six	(C) Transverse shear (D) Hoop 46. Which of the following gears should be
36.	Which of the following is an example of spherical pair? (A) Ball and socket joint (B) Bolts and nut (C) Ball bearing and roller bearing (D) None of these	recommended for a speed reduction of 50: 1. (A) Spur (B) Differential (C) Worm and worm wheel (D) Bevel 47 gear train is used in the gear box of an
37.	A universal joint is an example of pair. (A) Sliding (B) Lower (C) Higher (D) None of these	automobile. (A) Inverted (B) Epicyclic (C) Simple (D) Compound
38.	What is the unit of mass moment of inertia in S.I. units? (A) Kg-m (B) Kg-m ² (C) m ⁴ (D) Nm/Kg	 48 follower is generally used in automobile engines. (A) Roller (B) Flat faced (C) Knife edge (D) Spherical faced
39.	The energy possessed by a body for doing work, by virtue of its position is called energy.	49 circle is an imaginary circle which by pure rolling action gives the same motion as the actual gear.

(A) Clearance

(C) Addendum

(B) Dedendum

(D) Pitch

(A) Chemical

(C) Potential

(B) Electrical

(D) Kinetic

50.	nism contain?	es a pantograph mecha-	60.	ball bearing may be-	•
	(A) Two	(B) Four		(A) 0·1 to 0·25	(B) 0.25 to 0.30
	(C) Nine	(D) Ten		(C) 0·3 to 0·35	(D) None of these
51.	V-belts are usually u	sed for driver.	61.	coupling is not	a flexible coupling.
	(A) Short			(A) Oldham's	(B) Muff
	(B) Long			(C) Universal	(D) Bushed PM
	(C) Both short and l	ong	62.	In case of gears, the	contact ratio or engage-
	(D) None of these			ment factor should b	e—
52.		l mechanism of a loco-		(A) 1·1 (C) 1·6 to 1·8	(B) 1·3 to 1·5 (D) 1·9 to 2·1
	(A) Screw	our pairs is a pair. (B) Turning	63		cylinders are arranged
	(C) Spherical	(D) Sliding	05.	along lines.	cylinders are arranged
52	•			(A) Parallel	(B) Radial
33.	steel.	l bearing are made of		(C) Perpendicular	
	(A) Tungsten	(B) High carbon	64.	The vibrations at no	le of shaft are—
	(C) Vanadium	(D) Nickel-chrome		(A) Zero	(B) Minimum
54.	Transmission losses	, in a car, will be mini-		(C) Maximum	(D) Unpredictable
	mum in gear.	,,	65.	For ship, which of	the following effects is
	(A) First	(B) Second		more dangerous?	
	(C) Third	(D) Direct		(A) Steering	(B) Pitching
55.	What is the maximum of cam?	m value of pressure angle	"	(C) Rolling	(D) Waving
	(A) 8°	(B) 20°	00.	vibrating beam ?	of freedom are there in a
	(C) 60°	(D) 90°		(A) Zero	(B) One
56		ks in a mechanism is 6,		(C) Two	(D) Three
50.	the number of pairs v		67		mped oscillations as com-
	(A) 5	(B) 2	٥,,		of undamped vibrations,
	(C) 1	(D) 4		with viscous dampin	
57.	Mid-point of the fl	oating link of elliptical		(A) More	(B) Less
	trammel traces.			(C) Same	(D) Zero
	(A) A straight line	(B) A circle	68.	· · · · · · · · · · · · · · · · · · ·	there in a single row six
	(C) A parabola	(D) An ellipse		cylinder engine? (A) One	(B) Two
58.	A hook's joint is us	ed to connect two		(C) Three	(D) Four
	shafts.		60	` '	absorbers are generally
	(A) Parallel		09.	designed for da	
	(B) Intersecting			(A) Resonant	(B) Light
	(C) Non-parallel int	ersecting		(C) Critical	(D) Partial
	(D) None of these		70.	A vibrating beam h	as degrees of
59.	Type writer constitut	es—		freedom.	5
	(A) An inversion	(B) A mechanism		(A) One	(B) Two
	(C) A machine	(D) None of these		(C) Three	(D) Four

98	Mech. Engg.				
71.	is used to enlar drawing.	rge or reduce the size of a	81.	Which type of key shifting gears in gear	is used for mounting boxes?
	(A) Clinometer			(A) Saddle key	•
	(C) Clinograph	(D) Oscillograph	00	(C) Square key	•
72.	A kinematic chain re and turning pai	equires at least links rs.	82.	interference.	r profile is free from
	(A) 2, 3	(B) 3, 4		*	(B) Hypocycloidal
	(C) 4, 4	(D) 5, 4		(C) Epicycloidal	
73.	Which of the follow by a cam?	ving motions is imparted	83.	is taken as the	-
	(A) Reciprocating	(B) Oscillating		(A) Key	(B) Shaft
	(C) Rotating	(D) All of the above		(C) Hub	(D) None of these
74.	For boiler plate rive used.	ting head is usually	84.	bearings.	bearings are known as
	(A) Conical	(B) Pan		(A) Sleeve	(B) Plastic
	(C) Snap	(D) Counter sunk	05	(C) Antifriction	
75.	For motor car crar	nks shafts steel is	85.	the nominal dia	ne rivet hole is usually meter of the rivet.
,	widely used.			(A) Equal to	(B) Less than
	(A) Silicon	(B) High speed		(C) More than	
	(C) Chrome	(D) Nickel	96		
76.	In a sleeve and co	tter joint, the length of	80.	is thickness of gib	in a gib and cotter joint
	cotter is taken as-	, , , , , , , , , , , , , , , , , , ,		(A) Equal to	(B) Less than
	(A) 2 d	(B) 3 d		(C) More than	(D) None of these
	(C) 4 d	(D) 4·5 d	0.7		
77.	is a permanent	fastening.	87.	over the light so	lium series have capacity
	(A) Screw	(B) Rivet		(A) 5 to 10%	(B) 15 to 20%
	(C) Bolt	(D) Key		(C) 30 to 40%	(D) 45 to 55%
78.	A hot short metal is	brittle—	00		
	(A) When hot (B) When cold		88.	steady load.	f safety for steel and for
	(C) Under all condi	tions		(A) 3	(B) 4
	(D) None of the abo			(C) 5	(D) 6
70		ess concentration is more	89.	Residual stresses are	present in shafts.
12.	serious in—	ess concentration is more		(A) Cast	(B) Forged
	(A) Brittle materials	S		(C) Cold rolled	(D) None of these
	(B) Ductile material	ls	90.	The piston rod in a	steam engine is usually
	(C) Both (A) and (E	3)		•	s head by joint.
	(D) None of these			(A) Cotter	(B) Kunckle
80.	What is the value of	Wahl's factor for spring		(C) Universal	(D) None of these
	index of 4?		91.	Rankine's theory is u	sed for materials.
	(A) 1·2	(B) 1·4		(A) Plastic	(B) Ductile
	(C) 1·45	(D) 1·8		(C) Elastic	(D) Brittle

92.				buckle has left hand od will have		(A) Proportional to cube root of maximum tension
	threa		1101 1	od will have		(B) Proportional to the maximum tension
	(A)	Left hand	(B)	Multiple		(C) Inversely proportional to maximum
				Pointed		tension
93.	For	•		naterial the surface		(D) Proportional to square root of maximum tension
			(D)	0.55	103	. The inertia of rotating parts of the clutch
		0.35		0.55	105.	should be—
		0.75	(D)			(A) Minimum (B) Zero
94.		st's theory is used				(C) Maximum (D) None of these
	(A)	Ductile	(B)	Plastic	104	. Clutch is located between the transmission
	(C)	Elastic	(D)	Brittle	104.	and the—
95.	A sc	rew is specified b	y its	diameter.		(A) Rear axle (B) Differential
	(A)	Minor	(B)	Major		(C) Engine (D) Propeller shaft
	(C)	Pitch	(D)	None of these	105	
96.	Wha	it is the standard	lengt	h of the shaft?	105.	 Clutch facings are usually attached to the plate by—
		5 m		6 m		(A) Steel screws (B) Brass rivets
	(C)	7 m	(D)	All of the above		(C) Steel rivets (D) Aluminium screws
97.	The	taper on cotter va	aries	from—	106	. A clutch is usually designed to transmit
	(A)	1 in 10 to 1 in 6			100.	maximum torque which is—
	(B)	1 in 24 to 1 in 20)			(A) Equal to the maximum engine torque
	(C)	1 in 28 to 1 in 24	1			(B) 50% of the maximum engine torque
	(D)	None of these				(C) 150% of the maximum engine torque
98.	The	taper on a rectan	gular	sunk key is—		(D) None of the above
		1 in 10	-	1 in 30	107.	. In torque converter maximum torque multi-
		1 in 70		1 in 100		plication occurs at—
99	For	V-belt, the includ	. ,			(A) High speed (B) Medium speed
		10° to 20°		30° to 40°		(C) Low speed (D) Stop
	(C)	45° to 55°		65° to 75°	108.	. The central gear of an epcyclic gear set is
100.	In de	ouble helical gear	rs the	helix angle may be		called a— (A) Internal gear (B) Bing gear
		e up to—				(A) Internal gear (B) Ring gear (C) Planet gear (D) Sun gear
		30°		45°	100	
		60°		75°	109.	. The component of the torque converter that redirects the flow of oil to impeller is—
101.		crowning of the				(A) Freewheel (B) Impeller
		Improve the stre	-			(C) Turbine (D) Stator
	-			ing off the pulley	110.	. Critical whirling speed of a shaft is increased
	(C)	Improve the to	rque	transmitted by the		by—
	(D)	-	pe of	f pulley from safety		(A) Decreasing its length
		considerations				(B) Increasing its length

102. Considering centrifugal tension in belts, the

maximum permissible velocity is-

(C) Decreasing its diameter

(D) None of these

100 | Mech. Engg.

- 111. The type of rear axle used on trucks is—
 - (A) Fully-floating
 - (B) Semi-floating
 - (C) Three quarter floating
 - (D) None of these
- Central portion of a propeller shaft is made from a—
 - (A) Steel tube
 - (B) Steel shaft
 - (C) Cast iron rod
 - (D) Gun metal shaft
- The smallest gears inside the differential casing are—
 - (A) Pinion gears
- (B) Ring gears
- (C) Side gears
- (D) Sun gears
- For limiting friction conditions the maximum tension occurs—
 - (A) At stopping
 - (B) At maximum power speed
 - (C) At starting
 - (D) At specified speed between starting and maximum power speed
- 115. A pantograph is a kinematic arrangement-
 - (A) Which using only lower kinematic pairs
 - (B) Which using only lower kinematic pairs enlarge or reduce movements

- (C) Which using only lower kinematic pairs reproduces drawing to different scales
- (D) Which using only lower kinematic pairs are used for guiding cutting tools

Answers

	-		_	
1. (B)	2. (B)	3.(B)	4.(B)	5.(B)
6. (B)	7.(D)	8.(C)	9.(B)	10. (D)
11. (C)	12. (C)	13. (A)	14.(B)	15.(C)
16. (C)	17. (C)	18. (A)	19. (A)	20.(C)
21. (B)	22.(D)	23. (A)	24. (D)	25. (D)
26. (C)	27. (C)	28.(C)	29.(B)	30.(C)
31. (B)	32. (C)	33.(B)	34.(B)	35.(B)
36. (A)	37. (B)	38.(B)	39.(C)	40.(C)
41. (D)	42.(A)	43. (A)	44.(B)	45. (D)
46. (C)	47.(D)	48. (D)	49. (D)	50.(B)
51. (A)	52. (B)	53. (D)	54. (D)	55.(C)
56. (A)	57.(D)	58.(C)	59.(B)	60. (A)
61. (B)	62. (B)	63.(B)	64. (A)	65.(B)
66. (C)	67. (B)	68. (A)	69.(C)	70.(B)
71. (B)	72. (C)	73. (A)	74.(C)	75.(C)
76. (C)	77. (B)	78. (A)	79.(B)	80.(B)
81. (D)	82.(A)	83. (A)	84.(C)	85.(C)
86. (A)	87. (C)	88.(B)	89.(C)	90. (A)
91. (D)	92. (C)	93. (D)	94. (A)	95.(B)
96. (D)	97. (B)	98. (D)	99.(B)	100.(B)
101. (B)	102.(D)	103. (A)	104.(C)	105.(B)
106. (C)	107.(D)	108. (D)	109. (D)	110. (A)
111.(A)	112.(A)	113. (A)	114.(C)	115.(B)

10

ENGINEERING MATERIALS

Atomic Model

An element is defined as a substance which cannot be decomposed into other substances. The smaller particle of an element which takes part in chemical reaction is known as an 'atom'.

Dalton's Atomic Theory

States that:

- (i) All the atoms of one element are precisely alike, have the same mass but differs from the atoms of other element.
- (ii) The chemical combination consists of the union of a small fixed number of atoms of one element with a small fixed number of other elements.

Various atomic models proposed by scientists over the last few decades are—

- Thomson's plum pudding model
- (ii) Rutherford's nuclear model
- (iii) Bohr's model
- (iv) Sommer feld's model
- (v) Vector model
- (vi) Wave-mechanical model

All substances are made up of atoms. Each atom consists of the following—

- (1) Nucleus
- (2) Electrons

Physical Properties

Elastic Limit — The greatest stress a material can withstand without permanent elongation, that is when the load is removed the sample will return to its original length.

Yield Point—The stress at which appreciable elongation occurs without increase in stress.

Modulus of elasticity—The ratio of stress to strain within the elastic limit. It is a measure of stiffness.

Ductility and Brittleness—The ability of a metal to deform plastically without fracturing. In general, it means deformation under slow stresses instead of sudden impact. Although there are other measures, ductility is most commonly measured by means of elongation and reduction of area in the tensile test.

Final gauge – original

% elongation =
$$\frac{\text{gauge length}}{\text{Original gauge length}} \times 100$$

% reduction of area = $\frac{\text{Original area} - \text{Final area}}{\text{Original area}} \times 100$

A material is generally classified as brittle if the percentage elongation is less than 5 in a gauge length of 50 mm.

Poisson's Ratio—The ratio of transverse to the longitudinal elastic strain is an axial member, loaded on its longitudinal axis.

Impact Strength—The ability of a material to withstand shock loading.

Classification of Materials

The engineering materials may be classified as follows—

- Metal (i.e. iron, aluminium, copper, zinc, lead etc.)
- Non-metals (i.e. leather, rubber, plastics, asbestos, carbon etc.)

Non-Metals

The common non-metallic materials are leather, rubber, asbestos and plastics.

Engineering Materials may also be classified as follows—

- Metals and Alloys—example steel, copper, aluminium, brasses, bronze, invar, superalloys.
- (2) Ceramic Materials—MgO, CdS, ZnO, SiC, BTiO₂, silica, soda lime, glass, concrete, cement, ferrites, garnets etc.
- (3) Organic Materials—Plastics, PVC, PTFE, polythene, fibres-terylene, nylon, cotton, natural and synthetic rubbers, leather etc.

Difference between Metals and Non-metals-

Property	Metals	Non-metals
1. Structure	All solid metals have crystalline structure	They exist in amorphic or mesomorphic
	0.00	forms
2. Excitation of valence electron by E.M.F.	Easy	Difficult
3. State	Generally solids	Gases and
	at room	solids at
	temperature	ordinary
		temperature
4. Lustre	Possess metallic	Do not possess
	lustre	metallic lustre
Conductivity	Good conductor	Bad conductors
	of heat and	of heat and
	electricity	electricity
Malleability	Malleable	Non malleable
7. Ductility	Ductile	Not ductile
8. Hardness	Generally hard	Hardness varies
9. Electrolysis	Form anions	Form anions
10. Density	High density	Low density

Composites

- (A) Metals and Alloys and Ceramics—
 - Steel reinforced concrete
 - (ii) Dispersion hardened alloys
- (B) Metals and Alloys and Organic Polymers—
 - (i) Vinyl-coated steel
 - (ii) Whisker-reinforced plastics
- (C) Ceramics and Organic Polymers—
 - (i) Fibre-reinforced plastics
 - (ii) Carbon-reinforced rubber

Classification of Electrical Engineering Materials—The electrical engineering materials may be classified into the following four types.

- (A) Conductors
- (B) Semiconductors
- (C) Insulators
- (D) Magnetic materials

Electrical Properties of Materials — Important electrical properties of materials are :

- (i) Resistivity.
- (ii) Conductivity.
- (iii) Temperature co-efficient of resistance.
- (iv) Dielectric strength.
- (v) Thermoelectricity.
- (vi) Electrochemical phenomena-as in storage batteries.
- (vii) Electrophysical effects-as in contact potentials.
- (viii) Electro-mechanical effects-as in radars.

Super Conductivity—Super conductivity state can be abolished by the application of an external magnetic field or produced by a sufficiently large current flowing through the conductor.

Mechanical Properties of Metals — Important machanical properties of metals are as below:

- Strength
- (ii) Elasticity
- (iii) Plasticity
- (iv) Ductility
- (v) Malleability
- (vi) Toughness or tenacity
- (vii) Brittleness (viii) Hardness
- (ix) Fatigue (x) Creep

Testing of Materials—Materials are tested for one or more of the following purposes:

- To assess numerically the fundamental mechanical properties of ductility, malleability, toughness etc.
- (ii) To check chemical composition.
- (iii) To determine suitability of material for a particular application.
- (iv) To determine data i.e. force deformation (or stress) values to draw up sets of specifications upon which the engineer can base his design.
- (v) To determine the surface or surface defects in raw material or processed parts.

Classification of Tests—Tests on material may be classified as :

- (i) Non-destructive tests
- (ii) Destructive Tests

In non-destructive testing a component does not break and even after being tested. So it can be used for the purpose for which it was made.

Examples

Radiography, ultrasonic, inspection etc.

In destructive testing the component or specimen either breaks or remains no longer useful for further use.

Examples

Tensile test, impact test, torsion test etc.

(i) Non-destructive tests—Non-destructive tests may be defined as those which in a specific context would not damage the material being examined to an extent such that it is rendered useless for further for which it was originally meant.

The various methods used for nondestructive testings are as follows:

- (i) X-ray radiography
- (ii) Gama radiography
- (iii) Magnetic particle inspection
- (iv) Ultrasonic testing


- (v) Electrical method
- (vi) Damping test
- (ii) Destructive Tests—The component or specimen after being destructively tested either

breaks or remains no longer useful for further use. Examples of destructive tests are as: tensile test, impact test, torsion test, bend test, fatigue test

Iron Ores

S.N.	Name of the ore	Iron content	Chemical formula	Countries where available
1.	Magnetite	72.5%	Fe ₃ O ₄	India, Salem district (Chennai) Sweden, U.S.A., U.S.S.R.
2.	Haematite	65 to 70%	Fe_2O_3	India (Bihar, Orissa, Andhra, Madhya Pradesh, Mysore), U.S.A.
3.	Limonite	60%	2Fe ₂ O ₃ ·3H ₂ O	France, U.K., Spain, India.
4.	Siderite	40 to 44%	Fe CO ₃	U.K., U.S.S.R., India (Raniganj-Bengal)

Flow Sheet for Production of Iron and Steel

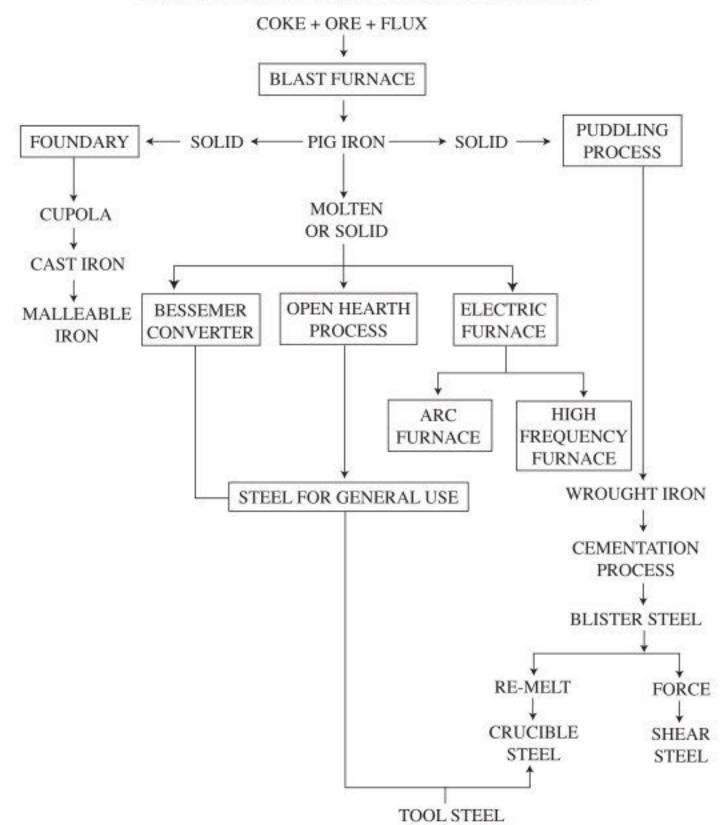

Cast Iron may be classified as-

- (i) Grey cast iron
- (ii) White cast iron
- (iii) Noltted cast iron
- (iv) Nodular cast iron
- (v) Malleable cast iron
- (vi) Alloy cast iron

Carbon Steels are classified as-

- (i) Low carbon steel or mild steel
- (ii) Medium carbon steels
- (iii) High carbon steels

Important non-ferrous metals are as follows—

- (i) Aluminium
- (ii) Copper
- (iii) Lead
- (iv) Tin
- (v) Zinc
- (vi) Magnesium
- (vii) Nickel

A bearing alloy should have the following characteristics—

- Good wearing quality
- (ii) Low co-efficient of friction
- (iii) High thermal conductivity
- (iv) High melting point
- (v) Good casting qualities
- (vi) Ability to withstand continuous bearing pressure and impact
- (vii) Ability to work satisfactorily at the rubbing speed at which it is required to
- (viii) Low shrinkage after casting
- (ix) Desired plasticity under the load it is called upon to bear
- (x) Economy in cost
- (xi) Non-corrosive property

Requirements of a heat insulating material—The main requirements of a thermal or heat insulating material are given below:

- Thermal stability
- (ii) Chemical stability
- (iii) Physical stability

- (iv) Low thermal conductivity
- (v) Resistance to moisture
- (vi) Low specific heat
- (vii) Low specific gravity
- (viii) Odourless
- (ix) Non-inflammability

Classification of heat insulating material—

The heat insulator may be classified in two ways:

- (i) Organic heat insulators
- (ii) Inorganic heat insulators

Organic heat insulators include —

- (i) Wool
- (ii) Cattle hair
- (iii) Eelgrass
- (iv) Cotton wool
- (v) Cork board
- (vi) Silk
- (vii) Wood pulp
- (viii) Sugarcane fibre
- (ix) Sawdust
- (x) Card board
- (xi) Paper
- (xii) Leather

Inorganic heat insulators include —

- (i) Air (still)
- (ii) Slag wool
- (iii) Mineral wool
- (iv) Glass wool
- (v) Aluminium foil
- (vi) Diatomaceous earth
- (vii) Charcoal
- (viii) Slag
- (ix) Wood ashes
- (x) Gypsum (powder)
- (xi) Coke (powder)

Solid Solution—Solid solution may be defined as a solution in the solid state which consists of two kinds of atoms combined in one type of space lattice.

Solid solutions are conductors but not so good as the pure metals on which they are based. Some examples of solid solutions are:

- (i) Cu-Zn alloys (Brass)
- (ii) Ni-Cu alloys (Monel metal)

Types of Solid Solutions—Solid solutions

occur in either of two distinct types — (iv) Ag-Cu alloys (sterling silver) Substitutional solid solution— (v) Fe-Cu-Ni alloys (certain stainless steels) Disordered, (ii) Ordered. (vi) Fe-C alloys (steels) Interstitial solid solution. OBJECTIVE QUESTIONS Babbit metal is base alloy. Dies, drills and taps contain carbon. (A) Below 0.4% (A) Tin (B) Copper (B) Below 0.8% (C) Above 1% (D) Above 2.5% (C) Lead (D) Tungsten can be easily drawn into wire. does not certain tin as an alloying element. (A) Cast iron (B) Zinc (A) Babbit metal (B) White metal (C) Tin (D) Copper (C) Solder (D) All of the above structure is obtained by austempering process of heat treatment. In 18-4-1 HSS (high speed steel) the percen-(B) Bainite tage of chromium is — (A) Sorbite (D) Troostite (A) 1% (B) 4% (C) Martensite (D) 20% (C) 18% is better suited for lighter duty bearings. is present in high percentage in magnet (A) Phosphor bronze steel.. (B) Plastics (A) Aluminium (B) Tungsten (C) White metal (C) Zinc (D) Copper (D) Monel metal Hardness of cementite is of the order of Corrundum contains more than 95%. BHN. (A) MgO (B) SiO₂ (A) 200 (B) 500 (C) Al₂O₃ (D) Steel (D) 1100 (C) 1400 What is the percentage of carbon present in With which of the following polymerisation cold rolled steel sheets? is associated? (A) 0.02% (B) 0.1% (A) Copper (D) 0.35% (C) 0·25% (B) Zinc is the binding material in cemented (C) Thermoplastic plastics carbides. (D) None of these (B) Cobalt (A) Nickel Under microscope, ferrite appears— (C) Carbon (D) Vanadium (A) White (B) Light Preheating is essential in welding— (C) Dark (D) None of these (A) High speed steel 8. The pH value of neutral solution is— (B) Cast iron (A) Equal to 7 (B) Less than 7 (C) All non-ferrous materials (C) Greater than 7 (D) None of these (D) None of these Foundry crucible is made of is not the neutral refractory material. (A) Graphite

(iii) Au-Ag alloys

(A) Graphite

(C) Chromite

(B) Kaynite

(D) Dolomite

(B) Lead

(D) Mild steel

(C) Cast iron

106 ∣ Mech. Engg. 19. Pipes of bicycle frames are made of (C) Organic polymers steel. (D) Neoprene (A) Cast (B) Hot rolled Ceramic cutting tools are made of — (C) Carbon chrome (D) Dead mild (A) Tungsten carbide 20. Cast iron has the maximum tensile (B) Silicon oxide strength. (C) Mixture of oxides of aluminium (A) White (B) Grey (D) None of these (C) Nodular (D) Pig For the production of L.D. converter is used. As percentage of carbon increases in steel its (A) Steel decreases. (B) Polythene (A) Corrosion resistance (C) Graphite (D) Cast iron (B) Ultimate strength Ball bearings are generally made of— (C) Hardness (A) Carbon steel (D) Ductility (B) Carbon chrome steel (C) Stainless steel The melting point is the lowest for— (D) Grey cast iron (A) Low carbon steel (B) High carbon steel is the essential gradient of any hardened (C) Cast iron steel. (D) Wrought iron (A) Carbon (B) Pearlite (C) Austenite (D) Martensite 23. structure has maximum hardness. (A) Troostile (B) Pearlite Out of the following which is the amorphous material? (D) Sorbite (C) Martensite (B) Brass (A) Lead Austenite is a solid solution of carbon in (D) Silver (C) Glass iron. structure in obtained if steel is quenched (A) Alpha (B) Beta in water. (C) Gamma (D) Delta (A) Sorbite (B) Pearlite 25. process needs no quenching. (C) Troostite (D) Martensite (A) Case hardening In metals the size of course grains is greater (B) Flame hardening than— (C) Induction hardening (A) 0.5 mm (B) 0.05 mm (D) Nitriding (D) 0.0005 mm (C) 0.005 mm 26. are usually made of mild steel. 37. has high tendency to get work hardened. (A) Fish plates (B) Angle irons (B) Aluminium (A) Lead (C) Die blocks (D) Shear blades (D) Silver (C) Brass 27. is commonly used for making house-38. structure can be studied by naked eye. hold utensils. (A) Atomic (B) Grain (B) Hindalium (A) Duralumin (C) Micro (D) Macro (C) γ - alloy (D) Magnalium Alloys of magnesium are— 28. has least co-efficient of expansion. (A) Easy to machine (B) Magnetic (A) Manganin (B) Invar (D) Prone to corrosion (C) Light

(C) Constantan

(A) Steel

(B) Diamond

29. will exhibit viscoelastic behavior.

(D) Duralumin

40. High speed steel belongs to the category of

(B) Stainless

(D) High carbon

..... steel.

(A) Alloy

(C) Low carbon

41.	In blast furnace	is used as fuel.	52.	Nickel is mater	ial.
	(A) Producer gas	(B) Coal		(A) Dielectric	(B) Ferro-electric
	(C) Coke	(D) Diesel		(C) Ferro-magnetic	(D) Dia-magnetic
42.	is the hardest ki	nown material.	53.	What is the product of	of cupola called?
	(A) Cemented carbic	ie		(A) Wrought iron	
	(B) Ceramic			(C) Mild steel	(D) Pig iron
	(C) Diamond (D) Alloy steel		54.	With which of the for related?	llowing age-hardening is
43.	Babbit metal is a	. alloy.		(A) Cast -iron	(B) Gun metal
	(A) Zinc base	(B) Lead base		(C) Duralumin	(D) German silver
	(C) Tin base	(D) None of these	55.	Which of the follow	ing hardening processes
44.	is used for beari	ing liner.		is not generally used	
	(A) Brass	(B) Bronze		(A) Nitriding	
	(C) Gun metal	(D) Babbit metal		(C) Age hardening	(D) None of these
45.	Under microscope pe	arlite appears as	56.		ed quickly by pro-
	(A) White	(B) Light		cess.	
	(C) Dark	(D) Finger print		(A) Carburising	
46.	test is a non-des	structive test.		(B) Cyaniding	
	(A) Impact	(B) Charpy		(C) Induction harder	ning
	(C) Radiography	(D) Tensile		(D) None of these	
47.	By which of the fo	llowing heat treatment	57.		ing process gives maxi-
	_	lected portion of the job		mum hardness to the	surface.
	can be hardened?			(A) Pack hardening	
	(A) Nitriding			(B) Nitriding	
	(B) Cyaniding(C) Pack hardening			(C) Cyaniding	
	(D) Flame and induc	tion hardening		(D) Induction harder	ning
48.	is obtained by	y isothermal hardening	58.	The chisel used for usually—	cutting steel sheets is
	operation. (A) Cementite			(A) Annealed	
	(B) Sorbite			(B) Normalised	
	(C) Acicular troostit	e		(C) Hardened	
	(D) Bainite			(D) Hardened and te	mpered
49.		nportant element which	59.	The corrosion resista	nce property of stainless
.,,	controls the physical	_		steels is due to the pro-	
	(A) Carbon	(B) Chromium		(A) Manganese	(B) Chromium
	(C) Vanadium	(D) Tungsten		(C) Cobalt	(D) Silicon
50.	What is the range of I	Mohr's scale ?	60.	The chisels are gener	ally made of steel.
	(A) 1 to 4	(B) 1 to 10		(A) High carbon	(B) Mild
	(C) 1 to 14	(D) 1 to 16		(C) Medium carbon	(D) Dead mild
51.	has maximum n	nalleability.	61.	Slip gauges are gener	ally made of—
	(A) Aluminium	(B) Copper		(A) Alloy steel	(B) Cast iron
	(C) Lead	(D) Wrought iron		(C) Bronze	(D) None of these

62.	Gold is materia	1.		(C) Temperature
	(A) Ferro-electric	(B) Ferro-magnetic		(D) Frequency
	(C) Dia-magnetic	(D) Para-magnetic	75.	Babbit metal is alloy of—
63.	Monel metal is an all	oy of—		(A) Cu and Zn (B) Sn and Cu
	(A) Cu and Cr	(B) Ni and Cu		(C) Sn, Cu and Sb (D) Sn, Cu, Sb and Pb
	(C) Ni and Cr	(D) Cu, Ni and Cr	76.	Ball bearing are generally made of—
64.	has excellant re	sistance to acids.	70.	(A) Carbon steel
	(A) Permalloy	(B) Constantan		(B) Cast iron
	(C) Hastelloy	(D) Monel metal		(C) Carbon chrome steel
65.	is not a ceramic	material.		(D) Stainless steel
	(A) Glass	(B) Bakelite	77	High speed steel should have —
	(C) Clay	(D) Aluminium oxide	,,,	(A) Wear resistance (B) Hardenability
66.	material sho	w direction dependent		(C) Toughness (D) Both (B) and (C)
	properties.	•	70	
	(A) Orthotropic	(B) Isotropic	/8.	The purpose of annealing is to—
	(C) Anisotropic	(D) None of these		(A) Induce stress (B) Harden the surface
67.	is a copper free	alloy.		(C) Induce hardness (D) Remove stresses
	(A) German silver	(B) Muntz-metal	79.	18-4-1 High speed steel contains-
	(C) White metal	(D) Gun metal		(A) 4% chromium (B) 1% carbon
68.	Heating elements are	generally made of—		(C) 0.7% carbon (D) 4% carbon
	(A) Invar	(B) Perminvar	80.	Central portion of a propeller shaft is made
	(C) White metal	(D) Nichrome		from a—
69	is not a constitu			(A) Steel tube (B) Steel shaft
07.	(A) Cobalt	(B) Copper		(C) Cast iron rod (D) Gun metal shaft
	(C) Nickel	(D) None of the above	81.	Air brakes are mostly used in case of—
70			01.	(A) Jeeps (B) Cars
70.	track.	used for rails of a railway		(C) Trucks (D) Three-wheelers
	(A) Mild	(B) High carbon		
	(C) Silicon	(D) Nickel	82.	Silicon steel is widely used in—
71	iron is the mag			(A) Chemical industry
/1.	(A) α	(B) β		(B) For nuts and bolts
	(C) γ	(D) δ		(C) Electrical industry
72				(D) For cutting tools
12.	cast iron?	ing properties pertain to	83.	The percentage of carbon in low carbon steel
	(A) Resistance	(B) Ductility		is—
	(C) Wear resistance			(A) 0·15 (B) 0·5
73		owing is the proof stress		(C) 0·7 (D) 1·3
13.	related?	ownig is the proof stress	84.	Shot peening—
	(A) Elongation	(B) Necking		(A) Improves fatigue life of small parts
	(C) Yielding	(D) Fracture		(B) Refines the grain structure
74.	affect the fatigu			(C) Changes the crystalline structure of
,	(A) Stress concentra	•		material
	(B) Magnitude of m			(D) Is done at recrystallization temperature
	•			

108 | Mech. Engg.

85.	The critical points for s	teels—	90. Which of the following is the lightest?									
	(A) Occur at same tem	(A)	Atom	(B)	(B) Molecule							
	(B) Cause change in p	(C) I	Proton	(D)	Electron							
	(C) May change in n cooling					Answers						
	(D) Change the chen steel	nical composition of	1. (A) 6. (C)	2. (B) 7. (B)	3. (C) 8. (A)	4. (B) 9. (A)	5. (C) 10. (C)					
86.	Galvanizing is generall											
00.	(A) Cast iron	, 40.10 0.1	11. (D)	12. (B)	13. (A)	14. (C)	15. (B)					
	(B) Non-metallic subs	tances	16. (B)	17. (B)	18. (D)	19.(C)	20.(C)					
		21. (D)	22. (C)	23.(C)	24. (C)	25. (D)						
	(C) Low-carbon steel	26. (B)	27.(D)	28.(B)	29. (D)	30.(C)						
	(D) Non-ferrous metal	S	31. (A)	32. (B)	33. (D)	34.(C)	35. (D)					
87.	Which of the following	g is a fuel used in fast	36. (B)	37. (C)	38. (D)	39.(C)	40. (A)					
	reactors?		41. (C)	42. (C)	43.(C)	44. (D)	45. (D)					
	(A) Chromium (B) Plutonium	46. (C)	47.(D)	48.(C)	49. (A)	50.(B)					
	(C) Graphite (I	D) Zinconium	51. (C)	52. (C)	53.(B)	54.(C)	55.(C)					
88.	Heavy water is used in	n atomic power plants	56. (C)	57. (B)	58. (D)	59.(B)	60. (A)					
	as—		61. (A)	62. (C)	63.(B)	64.(C)	65.(B)					
	(A) Moderator (B) Lubricants	66. (C)	67. (C)	68. (D)	69.(B)	70.(B)					
	(C) Fuel (I	D) Source of energy	71. (A)	72. (C)	73. (A)	74. (D)	75. (D)					
89.	Which adhesive is used	for plywood work?	76. (C)	77. (D)	78. (D)	79.(C)	80. (A)					
	(A) Gum (A	B) Castor oil	81. (C)	82. (C)	83. (A)	84. (A)	85.(B)					
	(C) Fevicol (I	O) Guar gum	86. (C)	87. (B)	88. (A)	89.(C)	90. (D)					

11

PRODUCTION ENGINEERING, INDUSTRIAL ENGINEERING AND MANAGEMENT

Plant Organisation

Plant — A plant ia a place where men, material, money, equipment, machinery etc are brought together for manufacturing products.

Organisation—Organisation is the pattern of ways in which a large number of people engaged in a complexity of tasks relate themselves to each other in systematic establishment and accomplishment at mutually agreed purpose.

Principles of Organisation —

- Consideration of objectives
- (ii) Relationship of basic components
- (iii) Responsibility and authority
- (iv) Span of control
- (v) Dividing and grouping work
 - (vi) Effective delegation
 - (vii) Communication
 - (viii) Line and staff relationships
 - (ix) Balance, stability and flexibility

Line or Scalar Organisation—Authority and responsibility flow vertically in an unbroken straight line from one level to another is called line or scalar organisation.

Advantages—

- (i) Simplicity
- (ii) Flexibility
- (iii) Quick decisions
- (iv) Communication
- (v) Executive development
- (vi) Unified control
- (vii) Fixed responsibility
- (viii) Effective discipline
- (ix) Economy

Demerits —

- (i) Overburdening
- (ii) Instability
- (iii) Lack of specialisation
- (iv) Autocratic control
- (v) Difficulty in staffing
- (vi) Inadequate communication

Functional Organisation—In the functional organisation, the enterprise is divided into a number of functional departments. Every functional department serves the rest of the organisation.

Advantages

- Specialisation
- (ii) Easier staffing
- (iii) Simplified control
- (iv) Better supervision
- (v) Scope for expansion
- (vi) High efficiency

Demerits

- (i) Lack of co-ordination
- (ii) Delayed decisions
- (iii) Poor discipline
- (iv) Low morale
- (v) Lack of executive development
- (vi) Uneconomical
- (vii) Divided responsibility

Line and Staff Organisation—This organisation is a combination of line and functional organisation.

Advantages

- (i) Discipline
- (i) Balanced decision
- (iii) Planned specialisation
- (iv) Undivided responsibility
- (v) Flexibility
- (vi) Staffing and developments

Demerits

- Ineffective staff
- (ii) Conflicts
- (iii) Expensive
- (iv) Lack of co-ordination

Scientific Management — Scientific management may be defined as a systematic to manage the enterprise on the basis of observation, experimentation and rotational decision.

Principles-

- Scientific method of production
- (ii) Standardisation
- (iii) Time and motion study
- (iv) Costing and cost control
- (v) Production planning and control through functional foremanship
- (vi) Scientific selection, training and remuneration of the workers.

Aims—The aims of scientific management are:

- Placement of right person on the right job through scientific selection and training.
- (ii) Reduction in cost of production by rational planning and regulation of cost control techniques.
- (iii) Increase in rate of production by use of standardised tools, equipment and methods.
- (iv) Elimination of wastage in the use of resource time and methods of operation.
- (v) Relative wage payment according to the efficiency of the worker.
- (vi) Improvement in the quality of the products by research, quality control and inspection devices.
- (vii) Ensuring steady flow of standard goods at fixed price.

Functions of management can be classified into the following six activities—

- (i) Planning
- (ii) Organising
- (iii) Staffing
- (iv) Directing
- (v) Controlling
- (vi) Co-ordinating

Elements of Communication —

- (i) Communicator
- (ii) Message
- (iii) Communication symbol
- (iv) Communication channel
- (v) Receiver

Some important factors affecting plant location are—

- Nearness to raw materials
- (ii) Transport facilities
- (iii) Nearness to markets
- (iv) Availability of labour
- (v) Availability of fuel and power
- (vi) Availability of water
- (vii) Climatic conditions
- (viii) Financial and other aids
- (ix) Land
- (x) Community attitude

Few sound principles of plant layout are-

- (i) Integration
- (ii) Minimum movements and material handling
- (iii) Smooth and continuos flow
- (iv) Cubic space utilization
- (v) Safe and improved environment
- (vi) Flexibility

Process Layout—It is also known as functional layout and is characterised by keeping similar machines or similar operations at one location/place.

Advantages

- (i) Better quality of the product
- (ii) Less waiting time
- (iii) Specialist supervisors
- (iv) Flexibility
- (v) Low investment due to less number of machines

Demerits

- There may be lack of co-ordination between different facilities.
- Difficult to allot production priority.
- (iii) It is necessary to have good planning to avoid wastage of time.

Product Layout—It is also known as line layout. It implies that various operations on a product are performed in a sequence and the machines are placed along the product flow line.

Advantages

- Operations can be carried out quickly
- (ii) Processing time is less
- (iii) Material handling cost is less/low
- (iv) Automatic material handling possible
- (v) Production control is easy
- (vi) Less space required

Demerits

- (i) Speed of production is slow
- Additional processes are not permitted to rigidity of layout.
- (iii) Material lying in queue is more.
- (iv) The material has to travel for a longer distance.

PPC (Production, Planning and Control)

Production—It involves sequence of operations that transform raw materials into the desired shape and size.

Planning—It begins with the analysis of given data, on the basis of which a scheme of utilisation of firm's services can be outlined.

Control—It involves supervising operations with the aid of control mechanisms and feedback information about the process of work.

Scheduling—"The fixation of time and date for each operation and also the time required to perform the entire series as routed and making allowance for other factors concerned"

There are three types of schedules -

- (i) Master schedule
- (ii) Manufacturing schedule
- (iii) Daily operating schedule

Follow-up—Follow-up or checking progress is the function of a watching and recording the progress of jobs as per schedule and making necessary adjustments in case of emergencies.

Types of Production—

- Job order production
- (ii) Batch or quality production
- (iii) Mass production

Forecasting—Forecasting means estimation of type, quantity and quality of future work.

Need of Forecasting—Sales forecasting is essential because:

 It determines the volume of production and the production rate.

- (ii) It forms basic for production budget, labour budget, material budget etc.
- (iii) It suggests the need for plant expansion.
- (iv) It emphasizes the need for product research development.
- (v) It suggests the need for changes in production method.
- (vi) It helps establishing pricing policies.
- (vii) It helps deciding the extent of advertising, product distribution etc.

Forecasting Technique—Following techniques are used for forecasting:

- (i) Historical estimate.
- Estimation by salesman.
- (iii) Statistical analysis.
- (iv) Moving average data method.
- (v) The exponential smoothing method.
- (vi) Market research by suitable questionnaire.
- (vii) Survey or buyer's views
- (viii) Collective opinion

Inspection — Inspection means checking the acceptability of the manufactural product.

Kinds of Inspection —

- Roving, process, petrolling and floor inspection.
- (ii) Fixed inspection
- (iii) Key-point
- (iv) Final inspection

Control Charts—A control chart is a day to day graphical presentation of the collected information it detects variations in the processing and warns if there is any departure from the specified tolerance limits. The various types of control charts are:

- (A) Variable or measurements charts-
 - (i) X-chart
 - (ii) R-chart
 - (iii) σ-chart
- (B) Attribute charts-
 - (i) P-chart
 - (ii) np-chart
 - (iii) C-chart
 - (iv) U-chart

Work Study—According to British standard institute work study is a term for those techniques

particularly 'method study' and 'work measurement'. Which are used in the examination of human work in all its contexts and which lead systematically to the investigation of all the factors which affect the efficiency of the situation.

Standard Time-

Standard time

= Average time × Rating factor
+ Other allowances.

Performance Rating—

Performance rating

 $= \frac{\text{Observed performance}}{\text{Normal performance}} \times 100$

Symbols used in work study -

○ → Operation

→ Delay

⇒ Transport

Steps involved in method study-

- Select the work and area to be studied.
- (ii) Define the problem.
- (iii) Record all relevant files.
- (iv) Examine all relevant facts critically.
- (v) Develop a new most economical and effective method.
- (vi) Sell the new method and find out discripencies.
- (vii) Install the new method as standard practice.
- (viii) Maintain the new method by regular checks.

Recording Techniques used in Method Study-

- The operation process chart
- (ii) The outline process chart
- (iii) The flow process chart (material)
- (iv) The flow process chart (man)
- (v) The multiple activity chart
- (vi) Two handed process chart
- (vii) The simultaneous motion cycle chart
- (viii) The flow diagram

- (ix) The string diagram
- (x) The travel chart

Financial Management and Budgeting-

Finance can be said as an activity concerned with planning, raising, controlling and administrating of funds used in the business.

The Scope of Financial Managements—

- (i) Estimating the requirements
- (ii) Determining the capital structure
- (iii) Sources of funds
- (iv) Utilisation of funds
- (v) Disposal of surplus
- (vi) Management of cash
- (vii) Financial controls

Some Common Sources of Raising Finances are—

- (i) Industrial banks
- (ii) Unit trust of India
- (iii) Industrial finance corporation of India
- (iv) Life insurance corporation of India
- (v) Industrial development bank of India
- (vi) Shares
- (vii) Debentures
- (viii) Mutual funds

Budgets may be classified as follows-

- (A)—
- (i) Fixed Budget
- (ii) Variable Budget
- (B)—
- Main Budget
- (ii) Master Budget
- (iii) Subsidiary Budget

Management Information System (M.I.S.)

—Management information system aims at providing information to the management to take timely, sound and accurate decisions.

Analysis—

- (i) Problem recognition
- (ii) Problem identification

Synthesis of Problem -

- (i) Preparation of flow chart
- (ii) Examination of information documents
- (iii) Working out quantities
- (iv) Establishing inputs and outputs
- (v) Assigning the task and responsibilities
- (vi) Running in parallel

OBJECTIVE QUESTIONS

1. activities are the activities for which 11. In industry routing is essential.

	(A) Dummy	(D) C 1 1/1 1		
	(11) Dunning	(B) Subcritical		(B) Assembly
	(C) Critical	(D) Supercritical		(C) Mass production
2.	layout provides	greater flexibility.		(D) Process
	(A) Product	(B) Process	12.	. PERT has time estimate.
	(C) Fixed position	(D) Group		(A) One (B) Two
3.	In a shop heavy jobs	are lifted by means of-		(C) Three (D) Four
	(A) Fork lift	(B) Conveyors	13.	. In which of the following cases, bar charts are
	(C) Hoists	(D) Overhead crane		suitable ?
4.	is a group incer			(A) Large projects (B) Major works
	(A) Stanlon plan	•		(C) Minor works (D) All of the above
		(D) None of the above	14.	. Queing theory is associated with which of the following ?
5.	chart is not asso	ociated with work study.		(A) Production time (B) Waiting time
	(A) Gnatt			(C) Scales (D) Inspection time
	(B) SINO		15.	. Which class of elements in ABC analysis are
	(C) Multiple activity	y		generally large in number ?
	(D) None of these			(A) A (B) B
6.	One TMU (Time Me	asurement Unit) equals —		(C) C (D) Unpredictable
	(A) 0.00001 hours		16.	. In which of the following are the specific
	(B) 0.00003 hours			cations of work operations and their sequence described?
	(C) 0.00006 hours			(A) Route card (B) Work order
	(D) 0.00008 hours			(C) Job order (D) Operation chart
7.	Large inventories a items.	re permitted in case of	17.	is the basic tool in work measurement.
	(A) Only C	(B) Only B		(A) SIMO chart (B) Process chart
	(C) A and B	(D) B and C		(C) Bar chart (D) Stop watch
8.	plan is a bonus	plan in which allowance	18.	. For which of the following stop watch is not needed?
		ns of time for each unit of		(A) R-chart
	output instead of mor			(B) Micromotion study
	(A) Rowan	(B) Bedaux		(C) SIMO chart
	(C) Group	(D) Hour-for-hour		(D) None of these
9.	introduced ther	·	19	. With which of the following is slack or slack
	(A) Blanket	(B) Gilbreath	17.	time associated?
10	(C) Cooper	(D) Adam		(A) An event
10.	widely used.	acceptance sampling is		(B) An activity
		(B) Batch		(C) Both (A) and (B)
	(A) Job	(B) Batch		(C) Bolli (A) and (B)

- 20. The slack on various events at critical path on a PERT/CPM chart—
 (A) Decreases continuously
 (B) Increases continuously
 - (C) Remains constant(D) Unpredictable
- 21. Availability is a function of-
 - (A) System effectiveness
 - (B) Maintainability
 - (C) Reliability
 - (D) Both (B) and (C)
- 22. System cost includes the total amount for-
 - (A) Service life support
 - (B) Development
 - (C) Production
 - (D) All of the above
- 23. is a measure of the net worth, of value of a system to the uses.
 - (A) Performance capability
 - (B) Availability
 - (C) System effectiveness
 - (D) Maintainability
- is the internal during which of the system is not in an acceptable operation condition.
 - (A) Maintainability
 - (B) Man-hours
 - (C) Administrative time
 - (D) Down time
- is the probability that a failed system is restored to operable condition in a specified down time.
 - (A) System effectiveness
 - (B) Maintainability
 - (C) Availability
 - (D) Man-hours
- OC curves are used for the selection lots by—
 - (A) Attributes
 - (B) Variables
 - (C) Variables and attributes
 - (D) Random

- 27. In sampling plans, N indicates—
 - (A) Acceptance number
 - (B) Rejection number
 - (C) Sample size
 - (D) Lot size
- 28. X-rays are used in-
 - (A) Ultrasonic testing
 - (B) Thermal methods
 - (C) Magnetic testing
 - (D) Radiography
- 29. Air gauge is a comparator.
 - (A) Electrical
- (B) Electronics
- (C) Pneumatic
- (D) Mechanical
- Size bar is used for measuring.
 - (A) Height
- (B) Angle
- (C) Length
- (D) Area
- The concept of prevention and control comes under—
 - (A) Managerial
- (B) Engineering
- (C) Planning
- (D) Statistical
- Material handling is more in case of inspection.
 - (A) Patrol
- (B) First piece
- (C) Floor
- (D) Centralised
- The basic objective of quality control in any organisation is—
 - (A) To build up customer good will
 - (B) To ensure control
 - (C) To achieve optimum cost
 - (D) All of the above
- In CPM the performance of a specific task is known as—
 - (A) Activity
- (B) Event
- (C) Contract
- (D) Dummy
- 35. Which of the following is not an important parameter of purchasing?
 - (A) Right source
- (B) Right price
- (C) Right sale
- (D) Right quantity
- 36. Which of the following is not the advantage of planning?
 - (A) Planning targets
 - (B) Removing disorders
 - (C) Fixing priorities
 - (D) Relaxation priorities

116 Mech. Engg	116	ı	Mech.	Engg
------------------	-----	---	-------	------

- The total cost in break even analysis consists of—
 - (A) Variable cost
 - (B) Fixed cost
 - (C) Fixed cost + variable cost
 - (D) Fixed cost + overhead cost + profits
- 38. ensures a part of the saving to the worker and rest to the employer.
 - (A) Piece rate system
 - (B) Taylor plan
 - (C) Halsey premium plan
 - (D) Emerson efficiency plan
- A worker, in the Halsey system of wage incentive plan, is—
 - (A) Induced to do work
 - (B) Ensured the minimum wages
 - (C) Paid as per efficiency
 - (D) Never a loser
- 40. Who are rewarded more in the Halsey 50-50 plan?
 - (A) Past average workers
 - (B) Past poor workers
 - (C) Past good workers
 - (D) All of the above
- In time study the basic unit of time measurement is—
 - (A) 0.01 minute
- (B) 0.001 minute
- (C) 0.01 hour
- (D) 0.001 hour
- 42. The chart which is prepared in advance and shows sequence of parts to be processed is known as chart.
 - (A) Man machine
- (B) Curve (D) Load
- (C) Project layout
- developed the idea of functional organisation.
 - (A) Gantt
- (B) F.W. Taylor
- (C) Frank Gilberth (D) None of these
- 44. Which of the following is the basic tool of work study?
 - (A) Stop watch
- (B) Planning chart
- (C) Process chart
- (D) Graph paper

- is the large scale production carried out on special purpose machines.
 - (A) Mass production
 - (B) Batch production
 - (C) Continuous production
 - (D) Intermillent production
- Micromotion study involves fundamental hand motions.
 - (A) 12
- (B) 16
- (C) 20
- (D) 24
- Therblig in micromotion study, is described by—
 - (A) An event
 - (B) Colours only
 - (C) Standard symbol and colour
 - (D) Symbols.
- 48. In work study, what does symbol \Rightarrow imply?
 - (A) Operation
 - (B) Transport
 - (C) Permanent storage
 - (D) None of these
- 49. Human resource planning includes -
 - (A) Raw material resources
 - (B) Recruitment and selection
 - (C) Sales of the firm
 - (D) None of these
- so. authored the principles of "scientific management".
 - (A) Elton Mays
- (B) Henry Fayol
- (C) F.W. Taylor
- (D) M.P. Follet
- 51. Queuing theory is used for-
 - (A) Job shop scheduling
 - (B) Inventory control
 - (C) Traffic congestion studies
 - (D) All of the above
- 52. was the first method invented for planning projects.
 - (A) CPM
- (B) PERT
- (C) Bar chart
- (D) Milestone chart
- Management and administration means the same thing. This opinion was given by—
 - (A) Henry Fayol
- (B) F.W. Taylor
- (C) Halsey
- (D) Spriegal

- Bar charts are suitable for—
 - (A) Large projects
- (B) Major projects
- (C) Minor projects (D) None of the above
- Queuing theory is associated with—
 - (A) Inventory
- (B) Waiting time
- (C) Sales
- (D) Production
- 56. plan is not wage incentive plan.
 - (A) Halsey
- (B) Rowan
- (C) Emerson
- (D) Taylor
- 57. Which of the following is the main disadvantage of line organisation?
 - (A) Rigid structure
 - (B) Delays in communication
 - (C) Top level executives have to do excessive work
 - (D) All of the above
- 58. is used to find percent idle time for men or machines.
 - (A) Work study
- (B) Time study
- (C) Method study
- (D) Work sampling
- 59. What does capital expenditure mean?
 - (A) Expenditure on property
 - (B) Recurring expenditure
 - (C) Expenditure on procurement of fixed assests
 - (D) None of these
- 60. is the times which results in least possible direct cost of an activity.
 - (A) Standard time
- (B) Crash time
- (C) Normal time
- (D) Slow time
- 61. With which of the following is 'Queuing theory' associated?
 - (A) Production time (B) Inspection time
 - (C) Sales
- (D) Waiting time
- 62. With which of the following is simplex method the basic method?
 - (A) Model analysis
 - (B) Linear programming
 - (C) Operating research
 - (D) Value analysis
- 63. plan ensures a part of the saving to the worker and rest to employer.
 - (A) Taylor
 - (B) Gilberth
 - (C) Emerson efficiency
 - (D) Halsey premium

- In the lines need to be balanced.
 - (A) Plant layout
 - (B) Functional layout
 - (C) Process layout
 - (D) Product layout
- 65. is the appellate authority for an industrial dispute.
 - (A) President
 - (B) Labour court
 - (C) Management
 - (D) High court/Supreme court
- A Gantt chart provides information about.
 - (A) Production schedule
 - (B) Material handling
 - (C) Both (A) and (B)
 - (D) None of these
- During process inspection is carried out.
 - (A) Manufacture of the boltles
 - (B) Surface grinding
 - (C) Surface hardening of mild steel plate
 - (D) Thread cutting on a lathe machine
- Where is 'bin card' used—
 - (A) In workshop
 - (B) In assembly shop
 - (C) In administrative wing
 - (D) In stories
- 69. does not pertain to inventory manage-
 - (A) Effective running of store
 - (B) Control of stock
 - (C) Production schedule
 - (D) None of the above
- The 'Employees Provident Fund Act' is applicable to —
 - (A) All major industries
 - (B) All industries
 - (C) The industries notified by government
 - (D) None of the above
- 71. ABC analysis deals with which of the
 - (A) Controlling inventory costs money
 - (B) Flow of material
 - (C) Ordering schedule of job
 - (D) None of the above

- 118 | Mech. Engg.
- 72. Why is 'job enrichment technique' applied?
 - (A) To make people happy
 - (B) To reduce labour monotony
 - (C) To overcome boring and demotivating work
 - (D) All of the above
- organisation is the best suited for steel plants.
 - (A) Line
 - (B) Staff
 - (C) Line, staff, and functional
 - (D) None of the above
- In an automobile industry material handling is done by
 - (A) Belt conveyor
 - (B) Trolley
 - (C) Overhead crane
 - (D) None of the above
- 75. What does MIS stand for ?
 - (A) Management information service
 - (B) Management information system
 - (C) Military inspection scheme
 - (D) None of the above
- In production emergency rush order can be pushed more effectively.
 - (A) Automatic
- (B) Job
- (C) Intermittent
- (D) Continuous
- 77. A crater is a pit formed on -
 - (A) Face of tool
 - (B) Flank of tool
 - (C) Surface of work piece
 - (D) None of the above
- A cutting tool fails due to—
 - (A) Crater wear and flank wear
 - (B) Crater formation
 - (C) Crater wear and flank wear meeting to cause crumbling of cutting edge
 - (D) None of the above
- 79. Swab is a-
 - (A) Welding defect
 - (B) Gear cutter
 - (C) Tool used in foundry
 - (D) Forging die

- Planning and control departments normally do not consist of—
 - (A) Inventory section
 - (B) Printing section
 - (C) Control cell
 - (D) Quality section
- The elasticity of demand explains the relationship between—
 - (A) Price and demand
 - (B) Utility and demand
 - (C) Price of substitutes and utility
 - (D) Income and demand
- The retirement benefits for workman are covered under—
 - (A) Payment of bonus act
 - (B) Employees provident fund act
 - (C) Workmen's compensation act
 - (D) Payment of wages act
- 83. The price which covers the variable cost as well as the fixed price is—
 - (A) Short term price
 - (B) Market price
 - (C) Long run price
 - (D) Equilibrium price
- The input-output analysis is often called as—
 - (A) Value analysis
 - (B) Cost benefit analysis
 - (C) Non-pricing analysis
 - (D) Inter industry analysis
- 85. Dispatching involves-
 - (A) Starting the work
 - (B) Collection data
 - (C) Making plan correction
 - (D) None of the above
- 86. Slack is-
 - (A) Tolerance, in terms of time, for an activity
 - (B) Earliest expected time-latest allowable time
 - (C) Least available time-earliest expected time
 - (D) Same as delay factor

	Vhich of the following riteria?	ing is not a job evaluation		A	Answers	S	
(A) Classification		1. (C)	2. (B)	3. (D)	4. (A)	5. (A)
	B) Ranking		6. (A)	7.(A)	8. (D)	9.(B)	10.(C)
			11. (B)	12. (C)	13.(C)	14.(B)	15.(C)
	C) Point rating		16. (B)	17.(D)	18. (A)	19.(B)	20.(C)
(1	D) Needs of the wo	orker	21. (D)	22.(D)	23.(C)	24. (D)	25.(B)
88. A	ABC analysis is used	d in—	26. (A)	27. (C)	28. (D)	29. (D)	30.(B)
	A) PERT		31. (D)	32.(D)	33. (D)	34. (A)	35.(C)
	B) CPM		36. (D)	37. (C)	38.(C)	39.(B)	40.(B)
	,	o.1	41. (B)	42. (C)	43.(B)	44. (A)	45. (A)
	C) Inventory contr		46. (B)	47. (C)	48.(B)	49.(B)	50.(C)
(1	D) All of the above	2	51. (C)	52.(D)	53. (A)	54.(C)	55.(B)
89. C	CPM is oriented to-	-	56. (D)	57. (D)	58. (D)	59. (C)	60. (D)
(.	A) Time	(B) Cost	61. (D)	62. (B)	63. (D)	64. (D)	65. (D)
(C) Activity	(D) Objective	66. (A)	67. (C)	68. (D)	69.(C)	70.(C)
90 I	oh going hehind t	the schedule are conve-	71. (A)	72.(D)	73.(C)	74.(C)	75.(B)
	iently shown in—	ine senedule are conve	76. (C)	77.(A)	78.(C)	79.(C)	80.(B)
	A) Pie chart	(B) Bar chart	81. (A)	82. (B)	83.(C)	84. (B)	85. (A)
		(D) Gantt chart	86. (C)	87. (D)	88.(C)	89.(C)	90. (D)
	,						

Foundry

A foundry is a place where castings are produced. It is a section of the workshop where metal castings are produced, is known as the foundry or foundry shop.

Casting

The casting is a process of pouring molten metal into a mould and allowing it to solidify. By this process, intricate parts can be given strength and rigidity which is not frequently obtainable by any other method. The mould or cavity into which the material is poured is made of some heatresisting material. Sand is widely used, as it can be readily packed to shape and resist high temperatures. Cast iron is widely used for casting. This is due to the fact in casting with this metal, it is impossible to have easy control on its properties which include fluidity, rate of shrinkage, strength and rigidity. Cylinder blocks of airplane engine, piston rings, machine tool beds, water supply and sewer pipes, locomotive wheels are the examples of castings.

Foundry Tools & Equipments

A large number of tools and other equipment are used in foundry work, particularly in sand moulding, for carrying out different foundry operation. All of them can be broadly classified into the following categories—

- 1. Hand Tools.
- Moulding Boxes.
- Moulding Machines.
- Melting Equipment.
- Pouring Equipment.

Hand Tools—The common hand tools used in foundry work are the following—

(A) Shovel—It consists of an iron pan fitted with a wooden handle. It is used for mixing moulding sand for filling moulding sand into the flask.




Fig.: Shovel

(B) Hand Riddle—It consists of a wooden frame fitted with a screen of standard wire mesh at its bottom. It is used for removing foreign materials from the moulding sand.




Fig.: Hand Riddle

- (C) Rammers This is used for striking the sand mass in the moulding box to pack it uniformly around the pattern. The common forms of rammers used in hand ramming are the following —
- (i) Hand Rammer It is smaller than the peen rammer and generally made of wood or metal. On one end it carries a wedge type construction, called peen, and on the other a solid cylindrical shape, known as a butt. It is mainly used in bench moulding.



Fig.: Hand Rammer

(ii) Peen Rammer—It has a wedge-shaped construction formed at the bottom of a metallic rod. It is a common hand tool and is quite useful in packing the sand in pockets and corners.



Fig.: Peen Rammer

(iii) Floor Rammer—It consists of a long steel bar carrying a peen at one end and a flat portion on the other. It is a larger and heavier tool than the peen and hand rammer. Its specific use is in floor



Fig.: Floor Rammer

moulding for ramming the sand in very large moulds. Due to its large length the moulder can operate it in standing position.

(D) Vent Wire—It is a thin steel rod or wire carrying a pointed edge at one end and a wooden handle or a bent loop at the other. It is used to pierce holes in the rammed sand to provide artificial vents which permit the easy escape of steam and gases generated by the hot metal in contact with the sand.



Fig.: Vent Wire

(E) Strike off Bar—It is a flat bar, made of wood or iron, to strike of the excess sand from the top of a box after ramming. Its one edge is made bevelled and the surface perfectly smooth and plane.




Fig.: Strike-off-bar

(F) Slick—It is a small double ended tool having one end flat and a spoon on the other. They are used for preparing and finishing the mould surface and edges after the pattern has been withdrawn. The commonly used slicks are heart and leaf, square and heart, spoon and bead and heart and spoon.



Fig.: Slick

(G) Smoothers and Corner Slicks—They are also finishing tools used for repairing and finishing flat and round surfaces, round or square corners and edges. Accordingly, they are given different names and the most common of these are shown above in the figure. These tools find a special favour in dry sand, green sand and loam sand work.

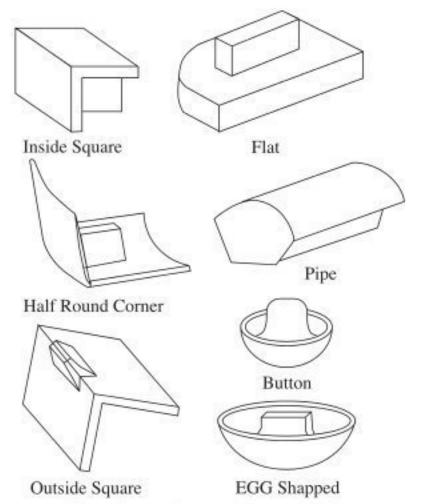


Fig.: Smoothers and Corner Slicks

(H) Lifters or Cleaners—It is also a finishing tool and is used for repairing and finishing the sand mould after withdrawal of pattern. It is also used for removing loose sand from mould cavity. Two useful forms of lifters are shown above in the figure.

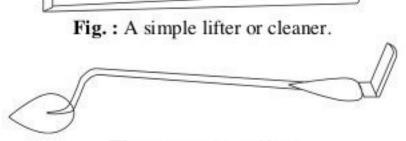


Fig. : A Yankee Lifter.

(I) Trowels—A Trowel is used for smoothening the surfaces and joints in a mould. They are made of iron and are provided with a wooden handle.



Fig.: Trowels

(J) Draw Spike—It is a tapered steel rod having a loop or ring at its one end and a sharp point at the other. It is used for drawing patterns from the sand.



Fig.: Draw spike

(K) Mallet—It is similar to a wooden mallet. In foundry work it is used to loosen the pattern in the mould so that it can be withdrawn easily.



Fig.: Mallet

(L) Sprue Cutter—A sprue cutter is also known as a runner peg. It is a tapered wooden peg. It is used to produce the hole after ramming the mould. It is in the form of tapered hollow tube which is inserted in the sand to produce the hole.



Fig.: Sprue Cutter

- (M) Sprue Pin—It is a tapered rod of wood or iron which is embedded in the sand and later withdrawn to produce a hole, called runner, through which the molten metal is poured into the mould.
- (N) Gate Cutter—It is a shaped piece of sheet metal to cut the feeding gate to connect the runner hole with the mould cavity.



Fig.: Gate Cutter

(O) Gaggers—The gaggers are also known as lifters. The gaggers are iron rods bent at one end or both ends. It is used for reinforcement of sand in the top part of a moulding box and to support hanging bodies of sand. Its lengths vary from 125 mm to 600 mm and it is coated with clay wash to cause the sand to adhere to them.




Fig.: Gaggers

(P) Bellow—It is used to blow away the loose or unwanted sand from the surface and cavity of the mould.



Fig.: Bellow

(Q) Swab—It is a hemp fibre brush used for moistening the edges of sand mould, which are in contact with the pattern surface, before withdrawing the pattern. A simple swab is a small brush having long hemp fibres. A bulb swab has a rubber bulb to hold the water and a soft hair brush at the open end. It is used for moistening the sand around the edge before the pattern is removed.

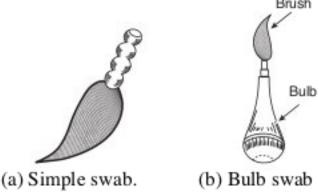


Fig.: Swabs

- (R) Rapping Plate—It is made of sheet and are firmly fixed to the top of the pattern by screws or bolts. It is used for lifting and rapping large patterns. It is available in different shapes.
- (S) Spirit Level—It consists of an air bubble in a curved glass tube protected by a wooden or metal flame. It is used by the moulder to ensure that his bed of sand, moulding box or moulding machine table is horizontal.

Pattern

Patterns are the foundry man's mould forming tool. It is used to form the mould cavity in which molten metal is poured. Since it is a direct duplication, the pattern very closely conforms to the shape and size of the desired casting, except a few variations due to the necessary allowance.

How a pattern differs from an actual component

 (a) It carries additional projections to produce seats for cores.

- (b) To compensate for metal shrinkage, it carries an additional allowance.
- (c) It carries the necessary draft to enable its easy removal from the sand mass.
- (d) It carries additional allowances over those portions which are to be machined or finished otherwise.

Pattern Material

A pattern for multiple uses must last long. Therefore must be made from a suitable material. The material commonly used for pattern making includes wood, metal and alloys, plasters, plastic, rubber and wax.

Material Selection for Making a Pattern

- (a) It should be easily shaped, worked, machined and joined.
- (b) It should be resistant to wear and corrosion.
- (c) It should be resistant to chemical action.
- (d) It should be easily available and economical.
- (e) It should be dimensionally stable and must remain unaffected by variations in temperature and humidity.

Characteristic Pattern Material

- (A) Wood—The most commonly used pattern material is dried or seasoned wood. The most important reason for using wood for making pattern is its easy availability, low weight, and low cost. It can be easily shaped, worked, joined and is relatively cheap. By a rough estimate, more than 90% of the casting are produced using wooden pattern. The main disadvantage of the wood is that it absorbs moisture, because of which distortions and dimensional changes occur. For very large castings, wood may be the only practical pattern material.
- (B) Metal—Metal patterns are extensively used for the large quantity production of castings and for closer dimensional tolerances on castings. It has much longer life and are free from major disadvantages of wooden patterns. The metal used for pattern material are aluminium, iron and brass. Aluminium is most commonly used.

- (C) Plastic—Plastics are used as pattern material because of their low weight, easier formability, smooth surfaces, and durability. Phenolic resin plastic and foam plastic suit best for this purpose. For making the pattern first the moulds are made, usually from plaster of Paris. The resin is then poured into these moulds and the two heated. At a specific temperature the resin solidifies to give the plastic pattern.
- (D) Polystyrene—Polystyrene or expanded thermocole is another pattern material, which has the special property that it changes to gaseous state on heating. Pattern made from polystyrene are disposable patterns, that are suitable for single casting, like a prototype. It is very easy to make a pattern from polystyrene because it is soft.
- (E) Wax—These patterns are exclusively used in investment casting. For this a die or metal mould is made in two halves into which the heated wax is poured. The die is kept cool by circulating water around it. As the wax sets on cooling the die parts are separated and the wax pattern taken out.

Pattern Contraction Allowances for Different Materials

Metal	Allowances mm/metre
Cast iron (Grey)	10.5
Cast iron (White)	21.5
Aluminium	16.0
Malleable iron	10.5
Brass	16.0
Bronze	10.5-21.0
Silver	10.0
Lead	24.0
Tin	7.0
Zinc	24.0
Copper, Nickel, Magnesium	16.0
Steel	21.0

Master Pattern

It is used for preparing the moulds for metal castings which are later used as pattern for further moulding work. It is accurately finished wooden pattern which carries double shrinkage allowance and the required machining allowance. For example, an aluminium pattern is to be made which is to be used for making mould for brass castings.

Size of master pattern = Size of the final casting to be made+shrinkage allowance for the material of which the pattern is to be made + finishing allowance for the metal pattern.

Machining Allowance

Machining allowance or finishing allowance is the extra material added to the certain parts of the casting to enable their machining or finishing to the required size, accuracy and surface finish. Thus this allowance is provided on those surfaces which are not to be left as cast but are to be subjected to one or more machining operations like turning and shaping. The amount of this allowance varies from 1.6 mm to 12.5 mm which depends upon the casting method used, size and shape of the casting, type of material, machining process to be used, degree of accuracy and surface finish required.

Draft Allowance or Taper Allowance

It is a taper provided on vertical faces of the removable patterns so that the pattern can be withdrawn from the rammed sand without causing damage to the vertical sides and without the need for excessive rapping. The amount of draft varies from 10 mm to 25 mm per metre on external surfaces and from 40 mm to 70 mm per metre on internal surfaces.

Shake Allowance or Rapping Allowance

This allowance is important in large-sized or precision castings. When a pattern is rapped for easy withdrawals, the mould cavity is enlarged. To account for this increase in size of cavity, the pattern size is reduced, *i.e.*, the pattern is made smaller by an amount equal to the mould enlargement that may take place during rapping. The amount of rapping allowance depends upon factors such as extent of rapping, size of mould, degree of compaction of sand, most of these are difficult to evaluate.

Functions of Pattern

The principal functions of a pattern are as under—

- To produce seats for cores in the mould. The seats in the mould are called coreprints.
- 2. To minimise defects in casting.
- To establish the parting surface and lines in the mould.
- To produce the mould cavity of appropriate shape and size in which the molten metal can be poured to obtain desired casting.
- To enable production of greesand or rammed-up cores within the mould itself.
- 6. To minimise the cost of casting.
- To establish distinct locating points in the moulds.

Types of Pattern

The type of pattern used for a particular casting depends upon the following factors—

- 1. The bulk of casting.
- 2. The number of casting required.
- 3. Type of moulding process.
- The shape and size of casting.

The following common types of pattern are used-

1. Solid or Single Piece Pattern—This type of pattern is the simplest of all the patterns. It depends upon the shape and it can be moulded in one or two boxes. This type of pattern is used for a limited number of castings because most of the moulding operations like parting surface formation, cutting of gating system, providing runners and risers, withdrawal of pattern etc. is done by hand. The figure as shown below is the solid pattern.



Fig.: Solid or single piece pattern

2. Split or Two Piece Pattern—If a solid pattern is used, many times the design of casting offers difficulty in mould making and withdrawal of pattern. Hence for such castings split or two piece patterns are employed. The split in the pattern occurs at the parting line of the mould. The two parts are alligned by means of Dowel pins as shown in the figure. In case of complicated castings, a pattern may be made in three or more parts. Such patterns are known as multi-piece pattern.

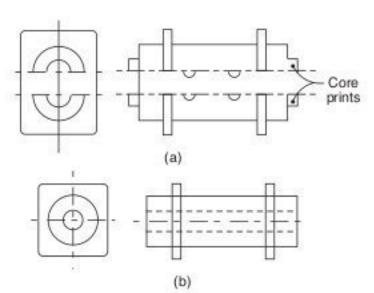


Fig.: A split pattern

(a) Two halves of pattern, (b) Prepared casting

The split patterns are commonly used for casting of spindles, cylinders, steam valve bodies, water stop-cocks and taps, bearings, wheels and small pulleys.

3. Gated Pattern—Generally gated patterns are made of metal to make them strong. They are used in mass production of small castings. For such castings multi-cavity moulds are prepared i.e., a single sand mould carries a number of cavities as shown in fig. For small production, these patterns may be made of wood, but for large production metallic patterns are preferred.

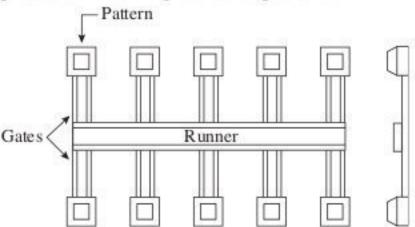


Fig.: Gated Pattern

4. Sweep Pattern—This pattern is used for preparing moulds of large symmetrical castings, particularly of circular cross-section. It is not

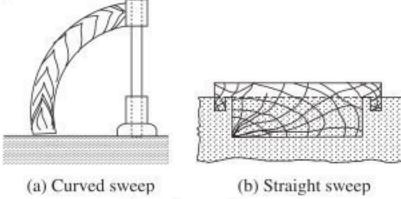


Fig.: Sweep Pattern

considered as a true pattern when compared with other. A sweep is a template of wood or other material which has the shape corresponding to the shape and size of castings. The principal advantage of this pattern is that it eliminates expensive pattern construction.

5. Skeleton Pattern—When a few and largesized castings are required, it is not suggestable to use a large solid pattern of that size because it will require a lot of wood and time to make a full pattern. In such condition, a skeleton pattern in the hollow form, wooden frame and stripes is used as shown in the fig. It is filled with loam sand and rammed. The surplus sand is removed by means of a strickle.

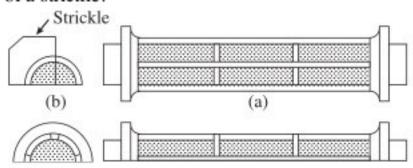


Fig.: Skeleton Pattern

- 6. Shell Pattern—It is used largely for drainage fittings and pipe work. Shell pattern is usually made of metal mounted on a plate and parted along the centre line, the two sections being accurately doweled together. The short bends are usually moulded and cast in pairs. Shell pattern is a hollow construction like a shell. Its outside shape is used as a pattern to make mould while its inside is used as a core box for making cores.
- 7. Cope and Drag Pattern—When a large castings are to be made, the whole pattern becomes too heavy to be handled by a single operator. In that condition a pattern is made in two parts which are separately moulded in different moulding boxes. When the moulds are completed, the two boxes are assembled to form the complete cavity, of which one part is contained by the drag and the other in cope.
- 8. Loose Piece Pattern—It is a pattern with loose pieces, which are necessary to facilitate withdrawal of the pattern from the mould. This type of pattern is used when the contour of the part is such that withdrawal of the pattern from the mould is not possible. This type of pattern is also used in such condition where the castings is having projections, undercuts or other configurations that would otherwise hinder the removal of the pattern. Hence, during moulding the obstructing part of the contour is held as a loose piece by the wire.

9. Match Plate Pattern—When the split patterns are attached on either side of the match plate, it called match plate pattern. A match plate is a plate on which two halves of a split pattern are mounted, on either side, such that one side is used to prepare one flask and the other side is used to prepare other flask. Match plate patterns speed up production and help in maintaining uniformity in the size and shape of the castings.

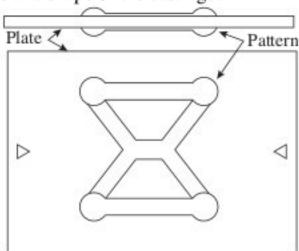


Fig.: Match plate patern.

Defects in Casting

The defects in a casting may be due to pattern and moulding box equipment, moulding sand, cores, gating system or molten metal. The principal defects are as under—


- Swell—It is an enlargement of the mould cavity by molten metal pressure resulting in localised or general enlargement of the casting.
- Shrinkage—It is a crack in the casting or dishing on the surface of a casting which results from unequal contraction of the metal during solidification.
- Pour Short—It occurs when the mould cavity is not completely filled because of insufficient metal.
- Scabs—It is the patch of sand on the upper surface of the casting.
- Mould Shift It results in a mismatching of the top and bottom parts of a casting, usually at the parting line.
- Sand Wash—It usually occurs near the ingates as rough lumps on the surface of a casting.
- Fins and Flash—It is the thin projection of metal not intended as a part of casting. These usually occur at the parting line of the mould.
- Sand Blow or Blow Hole—It is an excessively smooth depression on the outer surface of a casting.

 Slag Holes—These are smooth depression on the upper surface of the casting. They usually occur near the ingates.


Welding

It is a process of joining two similar or dissimilar metals by fusion, with or without the application of pressure and with or without the use of filler metal. The welding is broadly divided into the following two groups.

1. Pressure or Forge Welding (without any filler metal)

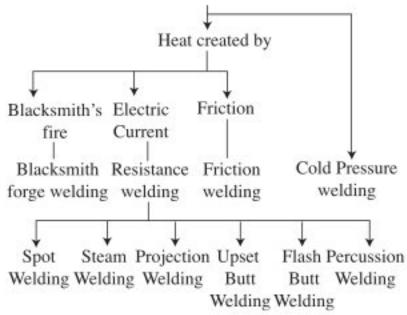

2. Non-pressure or Fusion Welding (without any filler metal)

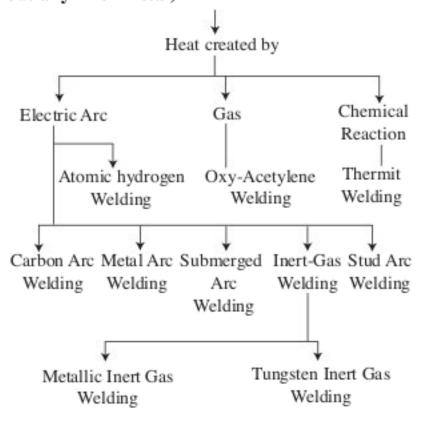

Types of Welded Joints

Lap joint, Butt joint, Corner joint, Edge joint and T-joints are the commonly used joints in fusion welding. The lap joints are employed on plates having thickness less than 3 mm. In butt welds, the edges do not require bevelling if the thickness of plate is less than 5 mm. If the plate thickness is 5 mm to 12.5 mm, the edges should be bevelled to V or U-groove and plates having thickness above 12.5 mm should have a V or U-groove on both sides.

Electric Resistance Welding

It is used for joining pieces of sheet metal or wire. It is a type of pressure welding. The welding heat is obtained at the location of the desired weld by the electrical resistance through the metal pieces to a relatively short duration, low voltage (from 6 to 10 volts only) high amperes (varying from 60 to 4000 amperes) electric current. The amount of current can be regulated by changing the primary turns of the transformer. When the area to be welded is sufficiently heated, the pressure varying from 25 to 55 MPa is applied to the joining area by suitable electrodes until the weld is solid. The various types of electric resistance welding are as follows—

- 1. Spot Welding—It is used for welding lap joints, joining components made from plate material having 0.025 mm to 1.25 mm in thickness. The plate to be joined together are placed between the two electrode tips of copper or copper alloy. The electrode tip diameter (d) should be equal to \sqrt{t} , where 't' is the thickness of plate and the distance between the nearest edge of plate and centre of weld should be at least $1.5 \ d$. The spacing between two spot welds should not be less than 3d.
- 2. Projection Welding—It is similar to spot welding except that one of the metal pieces to be welded has projection on its surface at the points where the welds are to be made. In other words, it is a multi-spot welding process.
- 3. Butt Welding—It is of mainly two types i.e., flash butt welding and upset butt welding. The upset butt welding is especially adopted to rods, pipes and many other parts of uniform section. The flash butt welding is extensively used in the manufacture of steel containers and in the welding of mild steel shanks to high speed drills and reamers.
- 4. Arc Welding—The arc welding is a fusion welding process in which the welding heat is obtained from an electric arc struck between the work and an electrode. The temperature of heat

produced by the electric arc is of the order of 6000°C to 7000°C. Both the direct current (D.C.) and alternating current (A.C.) may be used for arc welding, but the direct current is preferred for most purposes. Following are the two types of arc welding depending upon the type of electrode—

- (A) When a large electrode or filler rod is used for welding, it is said to be unshielded arc welding.
- (B) When the welding rods coated with fluxing material are used, then it is said to be shielded arc welding.
- 5. Carbon Arc Welding—In carbon arc welding the welding heat is obtained from an electric arc between a carbon electrode and the work. In welding heavy plates, the additional metal is deposited in the weld from a filler rod.
- 6. Metal Arc Welding—In metal arc welding the arc is produced between the metal electrode (filler rod) and the workpiece. During the welding process, the metal electrode is melted by the heat or the arc and fused with the work piece. The temperature produced by the heat is about 2400°C to 2700°C.
- 7. Atomic Hydrogen Welding—In atomic hydrogen welding, the arc is obtained between two tungsten electrodes while a stream of hydrogen passes by the arc and envelops the welding zones.
- 8. Stud Arc Welding—It is direct current arc welding process and it is used for welding metal Studs to the flat metal surfuces.
- 9. Submerged Arc Welding—In submerged arc welding, the arc is produced between a bare metal electrode and the work piece. The submerged arc welding is mostly done on low carbon and alloy steel but it may be used on many of the non-ferrous metals.
- 10. Thermit Welding—A mixture of iron oxide and aluminium is used in thermit welding. The mixture is ignited only at a temperature of about 1500°C. The major advantage of the thermit welding is that all parts of the weld section are molten at the same time and the weld cools almost uniformly. This results in a minimum problem with internal residual stresses. The thermit welding is often used in joining iron and steel parts that are too large to be manufactured such as rails, truck frames, locomotive frames, rail roads, for stern frames, rubber frames etc.
- 11. Gas Welding—It is a type of fusion welding in which the heat for welding is obtained

by the combustion of a fuel gas. The most widely used gas combination for producing a hot flame for welding metals is oxygen and acetylene (C₂H₂). The approximate flame temperature produced by oxy-acetylene flame is 3200°C.

Die and Punch—A die is a female part of a complete tool for producing work in a press. A punch is a male component of the die assembly, which is directly or indirectly moved by the press ram.

Bench Work and Fitting—The work carried out by hand at the bench is called bench work whereas fitting is the assembling of parts together by filing, chipping, sawing, scraping, tapping etc. necessary after the machine operation. The various tools used in fitting practice are as follows—

- Cutting Tools—The chief cutting tools used in fitting are cold chisels, hacksaws and files.
- (a) Cold Chisels—These are used to cut cold metal and are made by forging from cast tool steel of octagonal cross-section. After forging to shape and roughly grinding, the cutting edge should be hardened and tempered. The most commonly used cutting angle is 60° but this varies according to the type of material cut.
- (b) Hacksaws—It is the chief tool used by the fitter for cutting rods, bars and pipes into desired lengths. The cutting blade of hacksaw are made of carbon or high speed steel. The blades are specified by its length and the point or pitch. The point or pitch is measured by number of teeth per 25 mm length. The points of the teeth are bent to cut a wide groove and prevents the body of the blade from rubbing or jamming in the saw cut. This bending of the teeth to the sides is called the setting of the teeth. Usually alternate teeth are set to right and left, every third or fifth tooth left straight to break up the chips and help the teeth to clear themselves.
- (c) Files—A file is a hardened piece of high grade steel with slanting rows of teeth. It is used to cut, smooth or fit metal parts. The size of the file is indicated by its length. The coarseness or pitch of the file varies directly as the length of the file. Hence larger the length of the file coarser will be the pitch and smaller the file, finer will be the pitch.

Measuring Instruments and Gauges

 Ring Gauge—It is used to check the diameter of shafts or studs.

- 2. Plug Gauge—It is used to test the accuracy of holes. The standard plug gauge is used in general engineering workshop, tool room etc. The limit plug gauge is used where large quantities are to be produced. The single ended limit plug gauge has separate 'Go' and 'Not go' members. The progressive limit plug gauge has 'Go' and 'Not go' members on the same side of a handle.
- Snap Gauge—It is used to check the external dimension.
- Slip Gauge—It is used to check the accuracy of micrometers, callipers, snap gauge, dial indicators etc.
- Feeler Gauge—It is used to check the clearances between two mating surfaces.
- Outside Micrometer—It is mainly used to measure outside diameter of a job or length of a small part to an accuracy of 0.01 mm.
- Inside Micrometer—It is used to measure large internal diameters (over 50 mm) to an accuracy of 0·01 mm.
- Screw Thread Micrometer—It is used to measure the pitch diameter of screw threads to an accuracy of 0·01 mm.

- Depth Gauge Micrometer—It is used to measure the depth of holes, slots and recessed areas to an accuracy of 0.01 mm.
- 10. Vernier Callipers—It is used to measure external as well as internal diameters of shafts, thickness of parts, depth of slots and holes to an accuracy of 0.02 mm.
- 11. Vernier Height Gauge—It is mainly used to measure heights of parts to an accuracy of 0.02 mm.
- 12. Vernier Depth Gauge—It is used to measure the depth of holes, recesses, and distances from plane surface to a projection, to an accuracy of 0.02 mm.
- 13. Sine Bar—It is used either to measure angles more precisely than a bevel protractor or for locating any work to a given angle within very close limits. It is generally used with slip gauges.
- 14. Combination Set—It is very much useful instrument and has all the essential features of try square, bevel protractor, rule and scriber.
- 15. Universal Bevel Protractor—It is also called vernier bevel protractor. It is used for measuring and testing angles, within the limits of 5 minutes ($\frac{1}{12}$ of a degree).

OBJECTIVE QUESTIONS

- The casting method adopted for ornaments and toys of non-ferrous alloys, is—
 - (A) Slush casting
 - (B) Die casting
 - (C) Permanent mould casting
 - (D) Centrifugal casting
- 2. In hot chamber die casting machine-
 - (A) Melting pot is an integral part of the machine
 - (B) Melting pot is separate from the machine
 - (C) High temperature and pressure is used
 - (D) Melting pot have any location
- Scabs are casting defects which—
 - (A) Occur near the ingates as rough lumps on the surface of a casting
 - (B) Occur as sand patches on the upper surface of a casting
 - (C) Result in a mismatching of the top and bottom parts of a casting
 - (D) Result in general enlargement of the casting

- 4. Cast iron and steel pipes are produced by-
 - (A) Die casting
 - (B) Slush casting
 - (C) Investment casting
 - (D) True centrifugal casting
- A casting defect which occurs near the ingates as rough lumps on the surface of a casting is known as—
 - (A) Swell
- (B) Scab
- (C) Shift
- (D) Sand wash
- A casting defect which results in general enlargement of a casting is known as—
 - (A) Sand wash
- (B) Swell
- (C) Shift
- (D) Blow hole
- 7. Swab is used for-
 - (A) Repairing and finishing the mould
 - (B) Smoothing and cleaning out depression in the mould

- 130 | Mech. Engg.
 - (C) Reinforcement of sand in the top part of moulding box
 - (D) Moistening the sand around the edge before removing pattern
- 8. In order to deliver molten metal from pouring basin to gate—
 - (A) A core is used(B) A riser is used
 - (C) A sprue is used (D) A gagger is used
- 9. Which of the following statement is wrong?
- (A) A gagger is used for cleaning the moulding sand
 - (B) A slick is used for repairing and finishing the mould
 - (C) A stripper-plate machine is used to draw the pattern from the mould
 - (D) None of the above
- When a pattern is made in three parts, the top part is known as—
 - (A) Check
- (B) Cope
- (C) Drag
- (D) None of the above
- The surface to be machined is marked on the pattern by—
 - (A) Yellow colour
- (B) Black colour
 - (C) Red colour
- (D) Blue colour
- The surface to be left unmachined is marked on the pattern by—
 - (A) Blue colour
- (B) Yellow colour
- (C) Red colour
- (D) Black colour
- 13. A taper provided on the pattern for its easy and clean withdrawal from the mould is known as —
 - (A) Draft allowance
 - (B) Machining allowance
 - (C) Distortion allowance
 - (D) Shrinkage allowance
- 14. The adhesiveness is the property of a sand due to which-
 - (A) The sand grains stick together
 - (B) It evolves a great amount of steam and 23. The hot working of metals is carried outother gases
 - (C) It clings to the sides of a moulding box
 - (D) None of the above
- 15. If an aluminium pattern made from wooden master pattern is to be used for grey iron castings, then the shrinkage allowance on the wooden pattern should be—
 - (A) 12 mm/m
- (B) 16 mm/m
- (C) 22 mm/m
- (D) 26 mm/m

- In centrifugal casting method—
 - (A) Core is made of non-ferrous metal
 - (B) Core is made of sand
 - (C) Core is made of ferrous metal
 - (D) No core is used
- The purpose of riser is to—
 - (A) Act as a reservoir for the molten metal
 - (B) Deliver molten metal into the mould cavity
 - (C) Deliver molten metal from pouring basin to gate
 - (D) Feed the molten metal to the casting in order to compensate for the shrinkage
- Cores are used to—
 - (A) Improve mould surface
 - (B) Form a part of a green sand mould
 - (C) Form internal cavities in the casting
 - (D) All of the above
- The purpose of a gate is to—
 - (A) Act as a reservoir for the molten metal
 - (B) Deliver molten metal into the mould cavity
 - (C) Deliver molten metal from pouring basin
 - (D) Feed the molten metal to the casting in order to compensate for the shrinkage
- Green sand is a mixture of—
 - (A) 30% sand and 70% clay
 - (B) 90% sand and 10% clay
 - (C) 50% sand and 50% clay
 - (D) 70% sand and 30% clay
- The sand used for making cores is—
 - (A) Loam sand
- (B) Oil sand
- (C) Dry sand
- (D) Green sand
- 22. Recrystallisation temperature of steel is—
 - (A) 450°C
- (B) 650°C
- (C) 700°C
- (D) 800°C
- - (A) Below the recrystallisation temperature
 - (B) Above the recrystallisation temperature
 - (C) At the recrystallisation temperature
 - (D) At any temperature
- During hot working of metals—
 - (A) Scale is formed on the metal surface
 - (B) Poor surface finish is produced
 - (C) Close tolerances cannot be maintained
 - (D) All of the above

- Cold working of metals is carried out—
 - (A) Below the recrystallisation temperature
 - (B) Above the recrystallisation temperature
 - (C) At the recrystallisation temperature
 - (D) At any temperature
- The increase in hardness due to cold working, is called—
 - (A) Flame hardening
 - (B) Work hardening
 - (C) Age hardening
 - (D) Induction hardening
- 27. Cold working of metal increases-
 - (A) Hardness
- (B) Tensile strength
- (C) Yield strength
- (D) All of the above
- During cold working process—
 - (A) Close dimensional tolerance can be maintained
 - (B) Grain structure is distorted
 - (C) Strength and hardness of metal increases
 - (D) All of the above
- The process extensively used for making bolts and nuts is—
 - (A) Cold peening
- (B) Cold heading
- (C) Hot piercing
- (D) Extrusion
- A moving mandrel is used in—
 - (A) Tube drawing
- (B) Forging
- (C) Wire drawing (D) Metal Cutting
- 31. The dowels are—
 - (A) Box nails
- (B) Wire nails
- (C) Wooden nails
- (D) None of these
- A mortise gauge is a—
 - (A) Planing tool
- (B) Boring tool
- (C) Marking tool
- (D) Striking tool
- 33. Thread rolling is restricted to-
 - (A) Hard materials
- (B) Ferrous materials
- (C) Ductile materials (D) None of these
- A rip saw
 - (A) Is a two man saw
 - (B) Is used for cutting along the grains of wood
 - (C) Has a narrow blade with two wooden handles
 - (D) All of the above
- Aluminium is the best material for making patterns because it is—
 - (A) Corrosion resistant
 - (B) Easy to work

- (C) Light in weight
- (D) All of the above
- For smoothening and cleaning out depressions in the mould, a.....is used.
 - (A) Lifter
- (B) Swab
- (C) Gagger
- (D) Slick
- In order to produce uniform packing of sand in the moulds, a.....is used.
 - (A) Jolt machine
 - (B) Sand slinger
 - (C) Stripper plate machine
 - (D) Squeezing machine
- The property of sand due to which the sand grains stick together, is called—
 - (A) Permeability
- (B) Cohesiveness
- (C) Adhesiveness
- (D) Collapsibility
- 39. Which one of the following material will require the largest size of riser for the same size of casting?
 - (A) Cast iron
- (B) Steel
- (C) Copper
- (D) Aluminium
- The tolerance produced by shell moulding process of casting is—
 - (A) ± 0.5 mm
- (B) $\pm 0.2 \text{ mm}$
- (C) ± 1 mm
- (D) ± 0.05 mm
- 41. In average work, the tolerance produced by investment casting method is—
 - (A) $\pm 0.5 \, \text{mm}$
- (B) $\pm 0.2 \, \text{mm}$
- (C) $\pm 0.005 \, \text{mm}$
- (D) $\pm 0.05 \text{ mm}$
- 42. The fullers are used—
 - (A) For punching a hole
 - (B) To finish the punched hole
 - (C) For necking down a piece of work
 - (D) For finishing flat surfaces
- 43. The operation of cutting of a flat sheet to the desired shape is called—
 - (A) Punching
- (B) Piercing
- (C) Blanking
- (D) Shearing
- The operation of bending a sheet of metal along a curved axis, is known as—
 - (A) Notching
- (B) Slitting
- (C) Forming
- (D) Plunging
- The operation of straightening a curved sheet metal, is known as—
 - (A) Squeezing
- (B) Coining
- (C) Planishing
- (D) Drawing

- 132 | Mech. Engg.
- 46. In piercing operation, the clearance is provided on —
 - (A) Die
 - (B) Punch
 - (C) Half on the punch or die depending upon designer's choice
 - (D) Half on the punch and half on the die
- In spot welding, the spacing between two spot weld should not be less than—
 - (A) d
- (B) 1.5d
- (C) 3d
- (D) 6d
- 48. The electrode tip diameter (d) in spot welding should be equal to —
 - (A) √t
- (B) 1.5 √ t
- (C) 3√t
- (D) $6\sqrt{t}$
- In arc welding, the electric arc is produced between the work and the electrode by —
 - (A) Flow of current (B) Contact resistance
 - (C) Voltage
- (D) All of these
- For arc welding—
 - (A) Direct current is used
 - (B) Alternating current with high frequency
 - (C) Alternating current with low frequency is used
 - (D) None of these
- In electric resistance welding, voltage required for heating is—
 - (A) 2 to 4 volts
- (B) 6 to 10 volts
- (C) 12 to 16 volts
- (D) 60 to 90 volts
- Spot welding is used for welding—
 - (A) Lap joints in plates having 0.025 to 1.25 mm thickness
 - (B) Lap joints in plates having thickness above 4 mm
 - (C) Butt joints in plates having 0.025 mm to 5 mm thickness
 - (D) Butt joints in plates having thickness above 5 mm
- In shielded arc welding
 - (A) Welding rod coated with slag is used
 - (B) Large electrode is used
 - (C) Welding rod coated with fluxing material is used
 - (D) None of the above
- Seam welding is a—
 - (A) Continuous spot welding process
 - (B) Multi-spot welding process

- (C) Arc welding process
- (D) Process used for joining round bars
- The flux commonly used in brazing is—
 - (A) Borax
 - (B) Zinc chloride
 - (C) Ammonium chloride
 - (D) Rosin plus alcohol
- Carburising flame is used to weld—
 - (A) Brass and bronze
 - (B) Hard surfacing materials such as a stellite
 - (C) Steel, cast iron, copper, aluminium etc.
 - (D) All of the above
- 57. A neutral flame is obtained by supplying—
 - (A) More volume of oxygen and less volume of acetylene
 - (B) Equal volumes of oxygen and acetylene
 - (C) More volume of acetylene and less volume of oxygen
 - (D) None of the above
- Most of the oxy-acetylene welding is done with —
 - (A) Oxidising flame(B) Carburising flame

 - (C) Neutral flame (D) All of the above
- The maximum flame temperature occurs—
 - - (A) At the inner core
 - (B) At the outer core
 - (C) At the torch tip
 - (D) Between the outer and inner core
- 60. In thermit welding, thermit is a mixture of
 - (A) Charcoal and aluminium
 - (B) Iron oxide and aluminium
 - (C) Charcoal and iron oxide
 - (D) Charcoal, iron oxide and aluminium
- The consumable electrode is used in
 - (A) Submerged arc welding
 - (B) Carbon arc welding
 - (C) MIG arc welding
 - (D) TIG arc welding
- In fore-hand welding, the weld is made—
 - (A) From right to left
 - (B) From left to right
 - (C) Either from left to right or from right to
 - (D) First from left to right and then from right to left
- 63. In arc welding, the electric arc is produced between the work and the electrode by -
 - (A) Flow of current (B) Contact resistance
 - (C) Voltage
- (D) All of the above

	steel shanks to high speed drills, is— (A) Seam welding (B) Spot welding (C) Flash butt welding (D) None of the above	(A) Return stroke (B) Forward stroke (C) Both (A) and (B) (D) None of the above 75. V-block is used to—
65.	In TIG arc welding, the welding zone is shielded by an atmosphere of— (A) Hydrogen gas (B) Oxygen gas (C) Either (A) or (B) (D) Helium gas	 (A) Locate centres of round rods (B) Check the surface roughness (C) Check the trueness of flat surface (D) None of these
	The cold chiesel is made by— (A) Forging (B) Drawing (C) Rolling (D) Piercing	 76. A sheet metal pattern is— (A) A full size drawing of the object (B) A three dimensonal drawing of the object (C) An isometric drawing of the object
67.	The cold chiesels are made from— (A) Mild steel (B) High speed steel (C) Cast tool steel (D) Stainless steel	 (D) None of these 77. When the dimensions is expressed as 20^{+0.035}_{-0.025}, then the tolerance is—
68.	The cross section of chisel is usually— (A) Square (B) Octagonal (C) Hexagonal (D) Rectangular	(A) 0·15 mm (B) 0·20 mm (C) 0·025 mm (D) 0·02 mm 78. The instrument used to measure external and
69.	The hacksaw blade cuts on the— (A) Return stroke (B) Forward stroke (C) Cutting depends upon the direction of force (D) Both forward and return strokes	internal diameter of shafts, thickness of parts and depth of holes, is— (A) Inside micrometer (B) Outside micrometer (C) Vernier Callipers (D) Depth gauge micrometer
70.	A hacksaw blade is specified by its— (A) Width (B) Number of teeth (C) Material (D) Length	 79. The accuracy of micrometers, callipers, dial indicators can be checked by a— (A) Slip gauge (B) Ring gauge (C) Plug gauge (D) Feeler gauge
71.	The teeth of hacksaw blade are bent— (A) Towards left (B) May be bent in any direction (C) Towards right (D) Alternately towards right and left and every third or fourth left straight	 80. A ring gauge is used to— (A) Check the clearance between two meeting surface (B) Test the accuracy of holes (C) Check the diameter of shafts or studs (D) All of the above
72.	A file with 20 teeth in 25 mm is called— (A) Smooth file (B) Rough file (C) Dead smooth file (D) Bastard file	81. The lathe bed is made of— (A) Pig iron (B) Alloy steel (C) Mild steel (D) Chilled cast iron
73.	The type of file used for a wood work is— (A) Rasp-cut file (B) Double cut file (C) Single-cut file (D) None of these	82. The angle between the lathe centres is— (A) 30° (B) 60° (C) 75° (D) 90°

64. The welding process used in joining mild 74. A file removes the metal during-

134	Mech. Engg.		
83.	The chuck used for setting up of heavy and irregular shaped work should be— (A) Magnetic chuck (B) Drill chuck (C) Four jaw independent chuck (D) Three jaw universal chuck	91.	Which is the most widely used metal for casting? (A) Cast iron (B) Brass (C) Aluminium (D) Magnesium alloys
84.	Drilling is an example of— (A) Oblique cutting (B) Simple cutting (C) Orthogonal cutting (D) None of these		The brazing process is carried out in the temperature range— (A) 80–155°C (B) 170–300°C (C) 350–500°C (D) 550–670°C In thermit welding, aluminium and iron oxide
85.	In a shaper, the metal is removed during— (A) Forward stroke		are mixed in the proportion— (A) 1:2 (B) 1:3 (C) 2:1 (D) 1:1
86.	 (B) Return stroke (C) Neither the forward stroke nor return stroke (D) Both the forward and return stroke A mandrel is used to hold— 	94.	Which of the following belongs to the category of fusion welding? (A) Gas welding (B) Forge welding (C) Thermit welding with pressure (D) Electrical resistance welding
	 (A) A thin work (B) A heavy work (C) An eccentric work (D) None of these 	95.	Which of the process is used primarily to obtain surface finish? (A) Boring (B) Broaching (C) Hobbing (D) Horning
87.	For turning small taper on long workpiece, the suitable method is— (A) By swivelling the compound rest (B) By offsetting the tail stock (C) By a form tool	96.	The operation of making cone shape enlargement of the end of a hole is called— (A) Counter Boring (B) Counter sinking (C) Step drilling (D) Spot facing
88.	 (D) By a taper turning attachment In a planer— (A) Tool and work both reciprocate (B) Tool is stationary and the work reciprocates (C) Work is stationary and the tool reciprocates (D) None of the above 	98.	The metal removal during machining is by— (A) Plastic Distortion (B) Tearing (C) Shearing (D) Cutting With high speed steel tools, the maximum permissible operating temperature is close to— (A) 250°C (B) 540°C (C) 780°C (D) 950°C
89.	Which of the following operations can be performed by a drilling machine? (A) Tapping (B) Reaming	99.	The cutting edges of a standard twist drill are called— (A) Flanks (B) Wedges (C) Lips (D) Flutes
90.	(C) Spot facing (D) All of the above According to Indian standards, the total number of tolerance grades are—	100.	A portable drilling machine is specified by— (A) Spindle speeds and feed (B) Maximum thickness of job it can drill

(A) 8

(C) 14

(B) 12

(D) 16

(B) Maximum thickness of job it can drill (C) Maximum diameter of drill it can hold

(D) Maximum travel of spindle

Answers

1.(A)	2.(A)	3.(B)	4. (D)	5. (D)	51. (B)	52.(A)	53.(C)	54. (A)	55. (A)
6. (B)	7.(D)	8.(C)	9. (A)	10.(B)	56. (B)	57. (B)	58.(C)	59. (A)	60.(B)
11. (C)	12.(D)	13. (A)	14.(C)	15. (D)	61. (C)	62.(A)	63.(B)	64. (D)	65.(C)
16.(D)	17.(D)	18. (D)	19.(B)	20. (D)	66. (C)	67. (B)	68.(B)	69.(B)	70. (D)
21. (B)	22.(D)	23.(B)	24. (D)	25. (A)	71. (D)	72. (B)	73. (A)	74.(B)	75. (D)
26. (B)	27.(D)	28. (D)	29. (A)	30. (A)	76. (A)	77. (C)	78.(C)	79. (A)	80.(C)
31. (C)	32. (C)	33.(C)	34.(B)	35. (D)	81. (D)	82. (B)	83.(C)	84. (A)	85. (A)
36.(A)	37. (B)	38.(B)	39.(B)	40.(B)	86. (D)	87. (C)	88.(B)	89. (D)	90. (D)
41.(D)	42. (C)	43.(C)	44.(C)	45.(C)	91. (A)	92. (C)	93.(B)	94. (A)	95. (D)
46.(A)	47. (C)	48. (A)	49.(B)	50. (A)	96. (B)	97. (C)	98.(B)	99.(C)	100.(C)

Automobile is a combination of large number of parts. It can be divided into two major constituents (a) body and (b) the chassis.

The body is that part where passengers have their seats or the luggage and cargo to be carried is placed.

The chassis in the principal machine portion which have constituents like frame, axle, wheel, steering, engine, fuel tank, radiator etc.

Automobile is made up of the following components-

(A) Frame work, (B) Engine, (C) Transmission system, (D) Controls, (E) Super structures, (F) Auxiliaries.

Automobile Performance

The pressure developed by the burning of fuel in the engine cylinder is transmitted to crankshaft by the piston and connecting rod and a turning force or effort known as torque is produced. The crankshaft is coupled to the driving road wheels through clutch, gear box, propeller shaft, differential and axle shafts in an automobile. Thus torque produced by the engine is transmitted through the drive line to the road wheels to propel the vehicle. The torque depends upon the pressure exerted on the piston and the length of crank arm. It is measured in newton-meter (N-m). The actual power delivered by the engine is known as brake power. It is measured in watts (W) or kilowatts. The number of revolutions per minute (r.p.m.) at which the torque begins to decrease, depends upon the engine design. The torque available at the contact between driving wheel and road is known as tractive effort. At differential the gear box and final drive act as leverage to multiply, torque is inversely proportional to the speed. If the speed of

the gear is lower, the torque will be increased in the same proportion and vice-versa. Therefore torque at the driving wheels,

$$T_w = G \times \eta_t \times T_E$$

The engine torque can be increased by reduction gearing. The torque transmitted by the engine through gear box and propeller shaft to the final drive is increased in every gear except in top and overdrive. The torque of final drive, provided a differential is fitted, is always equally divided between each axle shaft irrespective of speed of road wheel. This does not apply to limited slip type differential.

Internal Combustion Engines

The internal combustion engine is a heat engine in which the combustion of fuel with oxygen of the air occurs within the cylinder of the engine. In order to run automobile engines, the air-fuel mixture burns in the engine cylinder to develop power.

The commonly used automobile I.C. engines are the following—

- 1. Petrol Engine—During suction stroke the air and fuel (Petrol) mixture is drawn in petrol engines. In compression stroke the mixture is approximately compressed 20 to 30 bar, therefore raising the temperature in the range of 400 to 500°C. The temperature reached after compression is below the auto-ignition threshold of the air fuel mixture and hence it is ignited with the help of a spark plug before the piston reaches the top dead centre. The petrol engine works on otto cycle or constant volume cycle.
- 2. Diesel Engine—It is also known as compression ignition engine. In diesel engine, the air is drawn during the suction stroke which is

compressed to approximately 30 to 45 bar (compression ratio 14 to 25), thus raising the air temperature in the range of 700°C to 900°C. The fuel is injected through nozzle and finely dispersed. It evaporates, mixes with air and ignites spontaneously. The pressure increases in the range of 55 to 75 bar during combustion. The burned gases, under full load, are at a temperature of about 600°C but in case of petrol engines it is 900°C. Hence diesel engine utilizes the heat of the fuel to a better degree and for this reason its fuel consumption is lower. The diesel engine works on diesel cycle or constant pressure cycle.

PARTS OF I.C. ENGINE

- 1. Cylinder—It is the heart of the engine where the fuel is burnt and the power developed.
- Cylinder Head—The cylinder head is usually a one piece casting bolted to the top of the cylinder block. In between the block and the head is given copper asbestos gasket to make gas tight joint. It requires to have good heat conduction and be readily cooled. These are generally made of aluminium alloy but there are also some cast iron cylinder heads.
- Cylinder Block—The material used for the cylinder block is grey cast iron or aluminium alloy. Cylinder block is the foundation of the engine. The other engine parts are attached or assembled into the cylinder block.
- **4. Piston**—The main function of a piston is to transmit the force exerted by the burning of charge to connecting rod. The distance that the piston travels from one end of the cylinder to the other is called the stroke. The material used for pistons are aluminium alloys made from aluminium with copper, silicon, nickel etc.
- Piston Rings—The piston rings lubricated with engine oil produce gas-tight seal between the piston and the cylinder liner. Generally, there are two types of rings, compression rings and oil control rings. The compression rings are made from special cast iron on carbon steel. The oil control rings are made from carbon steel and their function is to provide effective seal to prevent leakage of the oil into engine cylinder.
- 6. Connecting Rod—It is a link between the piston and crank shaft. The main function of the

- connecting rod is to transmit force from the piston to the crank shaft. It converts reciprocating motion of the piston into the circular motion of the crank shaft, in the working stroke. The connecting rods are die-forged from special steels such as nickel chrome steel and chrome molybdenum steel.
- 7. Main bearing-The crankshaft is supported and is turning in these main bearing.
- Crank Shaft—The crankshaft runs under the action of piston through the connecting rod and crank pin located between crank webs or checks, and transmits the work from the piston to the driven shaft. For crank shaft medium carbon steel material is extensively used. In some higher grade automobile chrome nickel steel is used.
- Crank Webs—These are masses for balancing purpose.
- Piston Pins or Wrist Pin—It connects the piston to the upper end of the connecting rod. Each end of the piston pin fits into the holes bored in piston base.
- 11. Intake Valve—Fresh air enters through this valve operated by a cam.
- 12. Cam Shaft—It is driven from the crankshaft by a timing gear on a chain. It operates the intake valve and the exhaust valve through the cams, cam followers, push rods and rocker arms.
- Valve Springs—These are made from spring steel serve to close the valves.
- 14. Fly Wheel—It takes care of the fluctuations or the cyclic variations in speed. It stores energy during the power stroke and releases during the other strokes thus giving a fairly constant output torque.

Engine Operations

- Suction Stroke—In this stroke, a mixture of fuel-vapour in correct proportion, is supplied to the engine cylinder.
- 2. Compression Stroke—In this stroke, the fuel vapour is first compressed in the engine cylinder.
- 3. Expansion Stroke—In this stroke, the fuel vapour is fired just before the compression is

complete. It results in the sudden rise of pressure, due to expansion of the combustion products in the engine cylinder.

4. Exhaust Stroke—The product of combustion after expanding during power stroke is pushed out through the exhaust valve. The expansion and exhaust strokes are similar to the gas and the petrol engines.

Fuel System

- 1. Carburettor The carburettor is a device for atomising and vaporising the fuel and mixing it with air in varying proportions to suit the charging operation condition in the engine. This process of breaking up and mixing the petrol with air is called carburetion.
 - Fuel Tank—It is used for storing the fuel.
- Fuel Gauge—It is used to measure the quantity of fuel present in the storage tank.
- 4. Fuel Pump—It is used to draw the fuel from the tank and deliver to the carburettor or injector.

Cooling System

- 1. Air Cooling System—This type of cooling system is mostly employed in light engines such as in motor cycles and scooters. The air cooled engines contain fins or ribs on the outer surfaces of the cylinders and cylinder heads. These fins provide more area for air contact, resulting in better radiation.
- 2. Liquid Cooling—This type of cooling system consists of a radiator, water pump, water jacket, thermostat, fan and other components. Each cylinder of the engine is surrounded by a water jacket. A thermostat is fitted between the engine and radiator. When the engine is started from cold, the thermostat closes to prevent coolant from entering the radiator until the engine has warmed up.

Transmission

The main functions of transmission are as under—

(A) To transfer the engine output power to the final driven gear.

- (B) To provide sufficient torque at starting, ascending, accelerating, braking etc.
- (C) To provide low to high speed driving capability.
- (D) To enhance the direction of wheel rotation.

Clutch

It is a device to continue or discontinue load on the engine. The clutch is installed between the engine and transmission. It transmits the power of the engine generally through the use of friction. The clutch is linked to the clutch pedal in the passenger compartment. The main components of a clutch are engine flywheel, a friction (clutch) disc, and a pressure plate. When the clutch pedal is in the released condition, the pressure plate is pushed solidly in direction of the flywheel by the diaphragm spring, which is located inside the clutch cover. There is no power that can be transmitted through the clutch.

Battery

The battery in an automobile is used as a chemical storage unit for the electrical energy produced by the alternator. Typically, system voltages are 12V for passenger cars and 24V for commercial vehicles (achieved by connecting two 12V batteries in series).

The working of battery is based on the principle that an electric current is generated when two kinds of metal having different ionization potential are connected with a conductive wire and submerged in an electrolyte. The electrical energy is converted into potential chemical energy during charging and discharging. This potential is reconverted into electrical energy.

Discharge of Battery

When the battery discharges, the positive plate containing lead peroxide (PbO₂) and negative plate having spongy lead (Pb) combine with sulphuric acid (H₂SO₄) to form lead sulphate (PbSO₄) and water (H₂O). As discharging continues and the sulphuric acid continues to decompose, the concentration of sulphuric acid in the electrolyte gradually declines. The specific gravity of the electrolyte reduces in proportion to the consumption of the

battery. The amount of electricity remaining in a battery can be determined by measuring the specific gravity of the electrolyte. If discharging continues beyond the limit, the lead sulphate formed on plates converts into white crystal. It is called sulphation. At this point, the chemical reaction is irreversible and the battery cannot be recharged.

Charging of Battery

When a current from a direct current power source is applied to discharged battery, the lead sulphate on the plates is electrochemically decomposed. In this process, sulphur ions are emitted by the plates and the specific gravity of the electrolyte is increased. At the same time active material on plates return to their original state i.e., to lead peroxide and to spongy lead, restoring the battery to full function.

During the final stage of battery charging, the emission of sulphur ions from the plates ceases and at the same time, electrolysis of water in the battery begins. The hydrogen gas is emitted around the negative plate and oxygen gas is emitted around the positive plate. When the battery is fully charged, each cell has 2·1 to 2·2 volts. The specific gravity of the electrolyte also increases gradually during charging until gases are given off because there is a little agitation of the fluid. When the gas emission begins, the specific gravity increases rapidly, reaching the maximum level at the end of charging and remaining constant thereafter.

Suspension

It is located between the wheels of the vehicle and the body. The suspension system includes springs, shock absorbers and their mountings. The purpose of a suspension system is to improve driving comfort, reduce the amount of vibration and import forces that are transmitted to the body.

The suspension system can be divided into two major types based on the design.

- (A) Rigid axle.
- (B) Independent type suspension system.
- (A) Rigid Axle—In this suspension system the left and right wheels are connected with a single axle and the load directed to the wheels is

supported by this system. It is more effective when it is desired to maintain a large suspension stroke in vehicles which exhibit large variation in load as a result of charges in cargo weight or passenger numbers. It is mainly employed in large or medium sized trunks and buses. The main drawback of this type of suspension system is that driving comfort and stability are inferior to that of independent type.

(B) Independent Type Suspension—There is no axle connecting the left and right wheels in the independent type of suspension. Therefore the load directed to the wheel is supported by the suspension arms. Driving and stability are superior when this type of suspension is adopted. The independent suspension system has become almost universal in case of front wheels. Double wishbone and Mac Pherson strut independent suspension are generally used in automobiles.

Wheel Alignment

It relates to the relative position of the wheels with respect to the wheel attaching parts and the ground. The proper wheel alignment reduces steering effort, provides directional stability and control, reduces tyre slip and wear.

Wheel Balance

The weight of the wheel should be distributed evenly to create the balanced condition. If the weight is distributed unevenly, centrifugal force causes the wheel to vibrate as it turns. A slight imbalance causes vibrations on the steering wheel. Wheel balance are mainly of two types: (A) Static wheel balance, (B) Dynamic wheel balance.

In order to correct static balance, a weight is attached to the wheel directly opposite to the heaviest spot. Whereas in order to correct dynamic imbalance, equal weights are placed 180 degrees apart from each other, one on the inside of the wheel and one on the outside, at the point of imbalance.

Tyres

It performs mainly the following functions—

- It supports the vehicle weight.
- It transfers the braking force and traction.

- It changes and maintains the direction of travel.
- It absorbs road shocks by acting as spring in the total suspension system.

Basic Structure of Tyre

- Tread—It is the part which comes into contact with the road surface. The tread is made from a mixture of many different kinds of natural and synthetic rubbers. It protects the body and provides high grip, longer life and durability etc.
- 2. Bead Wires—It is a loop of high strength steel cable coated with rubber. It gives the tyre strength. It needs to stay seated on the wheel rim and to handle the forces applied by the tyre mounting machines when tyres are installed on rims.
- 3. Side Wall—It is the most flexible part of the tyre and provides the lateral stability to the tyre.
- 4. Body—It sustains the inflation pressure and endures load and road shocks. The body is made up of several layers of different fabrics, called plies. The most commonly used ply fabric is polyester cord.

Tyre Size

The tyres are generally specified and designated by the nominal size of their sectional width and the wheel rim diameter. The cross-bias ply tyres are generally designated as: $7.5 \times 14 \times 6$ PR.

Where, the section width or thickness of tyre from shoulder to shoulder is 7.5 inches, the diameter of the wheel rim is 14 inches and the PR represents the ply rating of the tyre. It represents the maximum recommended load which the tyre can carry when used in specific condition. The radial tyres are generally designated as 145/70 R 1269 S.

Where the section width or thickness of tyre from shoulder to shoulder is 145 mm, the aspect ratio is 70%, \underline{R} represents the tyre is radial, the diameter of the wheel rim is 12 inches, the load index is 69, the \underline{S} is the speed symbol.

Brake System

The brake system reduces wheel rotating speed in order to reduce speed of the vehicle. When brakes are applied on a moving vehicle, the kinetic energy of motion of the vehicle is transformed into heat generated by the friction between the brake and the rotating drum (or disc). The heat generated is dissipated into the surrounding air. The braking system which are commonly used in all automobiles are the following—

- (A) Parking Brake—It is used to hold the vehicle stationary, when applied. At the time of parking, the braking is necessary to prevent the vehicle from rolling off due to road gradient or blowing wind. The brake manually operates on the rear wheels through cables or mechanical linkage from an auxiliary foot lever or a hand pull.
- (B) Service Brake—Although the most automotive service brakes are hydraulic brakes. The hydraulic action begins when force is applied to the brake pedal. This force creates pressure in the master cylinder, either directly or through a power booster. It serves to displace hydraulic fluid stored in master cylinder. The displaced fluid transmits the pressure through the fluid filled brake lines to the wheel cylinders that actuate the brake shoe. The actuation of these mechanisms forces the brake pads and linings against the rotors (front wheel) or drums (rear wheel) to stop the wheel. Master cylinder of a brake system converts pedal force into hydraulic pressure to operate the brakes. When the brake pedal is depressed, the piston in the master cylinder are activated, causing pressure act on the brake fluid. When the brake pedal is released, return springs move the pistons back to their original positions. Generally, all the vehicles utilise tandem master cylinders. This type of master cylinder serves two independent hydraulic lines. The master cylinder is fitted with a brake fluid reservoir. The fluid in the reservoir compensates for variations in the fluid level that accompany movement of piston and for permanent changes in the quantity of fluid in the brake lines that occur as the brake pads become worn.

OBJECTIVE QUESTIONS

1.	The number of points at which the engine clutch gear box unit is supported on the chassis frame is—	9.	 The maximum intensity of pressure which the clutch facing can withstand without bein damaged is about— 			
	(A) One (B) Two (C) Three (D) Four		(A) 10 Pa (B) 10 kPa (C) 100 kPa (D) 1000 kPa			
2.	Weight of the vehicle produces in the side members of the frame— (A) Verticle bending (B) Horizontal bending (C) Torsion (D) All of these	10.	Cushioning springs in clutch plate are meant to reduce— (A) Vehicle speed (B) Jerky starts (C) Torsional vibrations (D) None of the above			
3.	The most effective section against bending is— (A) Rectangular bar	11.	Free pedal play in car clutches is about— (A) 3 mm (B) 30 mm (C) 50 mm (D) 90 mm			
	(B) Round bar (C) Round hollow tube (D) Square hollow section	12.	The thrust bearing should come into contact with the release levers when the— (A) Vehicle is running very fast			
4.	A clutch is usually designed to transmit maximum torque which is— (A) 80 per cent of the maximum engine		(B) Vehicle is stationary(C) Clutch pedal is pressed(D) Vehicle is driven very slow			
	torque (B) 150 per cent of the maximum engine torque	13.	The parts of the cover assembly that hold pressure plate against the clutch plate are the—			
	(C) Equal to the maximum engine torque (D) None of the above		(A) Release levers (B) Thrust bearings (C) Struts (D) Springs			
5.	Clutch facing are usually attached to the plate by—	14.	Electric brakes are commonly used on— (A) Two wheelers (B) Cars			
	(A) Brass rivets (B) Steel rivets		(C) Trucks (D) Trailers			
6.	(C) Steel screw (D) Aluminium screw The inertia of the rotating parts of the clutch should be—	15.	Air Brakers are mostly used in case of— (A) Cars (B) Jeeps (C) Trucks (D) Three wheelers			
	(A) Zero (B) Minimum	16.	The hand brake usually operates on—			
7.	(C) Maximum (D) None of the above Coefficient of friction for the clutch facing is	17	(A) Rear wheels (B) Front wheels (C) Right wheels (D) Left wheels			
	approximately— (A) 1·2 (B) 0·8	1/.	Brake lining consists mainly of— (A) Asbestos (B) Copper			
	(C) 0·1 (D) 0·4		(C) Cast iron (D) Aluminium			
8.	The clutch is located between the transmission and—	18.	The type of reflector used for automobile head lamp is—			
	(A) Differential (B) Engine (C) Rear axle (D) Propeller shaft		(A) Spherical (B) Parabolic (C) Hyperbolic (D) None of these			

142	Mech. Engg.		
() (I) (O)	The clutch used in cars is usually— A) Multiple disc type B) Single disc type C) Centrifugal type D) None of these	28.	The oil pan in an engine may be made of— (A) Cast iron or brass (B) Steel or cast iron (C) Steel or aluminium (D) Cast iron or zinc
21. T (A (I (I (I (I 22. B (A (I	Number of forward gear box speeds in Indian ars is— A) 3 (B) 4 C) 5 (D) 6 The first Indian car to use disc brakes is— A) Maruti 800 B) Maruti 1000 C) Ambassador Nova D) Tata Sierra Sest spanner for automobile work is the— A) Open ended type B) Combination type C) Ring type D) Socket type	30.	The largest diameter of a camground piston is— (A) At the piston land (B) Along piston pin axis (C) At 90° to the piston pin axis (D) At 45° to the piston pin axis Piston pins on some engines are offset to the— (A) Right side (B) Left side (C) Major thrust side (D) Minor thrust side The purpose of piston ring is to control— (A) Oil consumption
23. T	23. The tool employed to measure the shaft run- out is the— (A) Feeler gauge (B) Dial gauge (C) Micrometer (D) Calliper		 (B) Combustion pressure (C) Cylinder wall lubrication (D) All of the above The minimum number of compression rings
(A (I (C (I 25. T (A	The materials used for cylinder block are— A) Cast iron and steel B) Cast iron and aluminium alloy C) Steel and aluminium alloy D) Brass and steel The angle between the cylinder axes and the rankshaft centre line in an engine is— A) 75° (B) 90°		in an automotive engine is— (A) One (B) Two (C) Three (D) Four Compression rings are generally made of— (A) Low carbon steel (B) High carbon steel (C) Aluminium (D) Cast iron
26. Mat (A (I (I (I	C) 105° (D) 180° Most difficult gasket sealing problem occurs the— A) Head B) Timing cover C) Oil pan D) Intake manifold		The uppermost ring on a piston is usually plated with— (A) Steel (B) Cast iron (C) Aluminium (D) Chromium Connecting rod connects the crank shaft and the— (A) Cylinder head (B) Cam shaft
() (I) (O)	Cam shaft in an engine is always mounted— A) Parallel to the crank shaft B) Perpendicular to the crank shaft C) Inclined to the crank shaft D) None of the above	36.	(C) Piston (D) Cylinder block The piston pins in the modern automobile engines are usually— (A) Fully-floating (B) Semi-floating

- (C) Three quarter floating
- (D) Fixed to both piston and the connecting rod end
- The cam shaft controls—
 - (A) Valve closing (B) Valve opening
 - (C) Valve timing
- (D) All of these
- The cam shaft drive which does not require lubrication is—
 - (A) Chain drive
 - (B) Toothed rubber belt
 - (C) Gear drive
 - (D) None of these
- The exhaust valve usually starts opening—
 - (A) At TDC
- (B) At BDC
- (C) Before TDC
- (D) Before BDC
- On the front end of a crank shaft is mounted—
 - (A) Timing gear
 - (B) Fan pulley
 - (C) Vibration damper
 - (D) All of the above
- 41. On the rear end of a crank shaft are mounted-
 - (A) Timing sprocket (B) Flywheel
 - (C) Counter weight (D) Vibration damper
- The engine valves are closed by
 - (A) Cam shaft
- (B) Timing valve
- (C) Valve springs
- (D) Crank shaft
- Exhaust valve face angle is generally—
 - (A) 30°
- (B) 45°
- (C) 60°
- (D) 90°
- Material used for inlet valve is usually—
 - (A) Austinitic steel
 - (B) Mimonic alloy
 - (C) Silicon-chrome steel
 - (D) Precipitation-hardening steel
- 45. The most commonly used valve in an automobile engine is—
 - (A) Sleeve valve
- (B) Poppet valve
- (C) Rotary valve
- (D) None of these
- The carbon from the cylinder head is removed with-
 - (A) Water
- (B) Scraper
- (C) Caustic Soda
- (D) Soap

- 47. The engine requires overhauling in case of—
 - (A) Mechanical failure
 - (B) Poor compression
 - (C) Excessive consumption of lubricating oil
 - (D) All of the above
- 48. The diesel engine works on—
 - (A) Carnot cycle
- (B) Diesel cycle
- (C) Otto cycle
- (D) Rankine cycle
- The petrol engine works on—
 - (A) Carnot cycle
- (B) Diesel cycle
- (C) Rankine cycle (D) Otto cycle
- The petrol engines are also known as—
 - (A) Steam engines
 - (B) Compression ignition engine
 - (C) Spark ignition engine
 - (D) None of these
- The type of wheel which cannot be used with a tubeless tyre is—
 - (A) Disc wheel
 - (B) Wire wheel
 - (C) Light alloy wheel
 - (D) Composite wheel
- 52. The type of wheel preferred in sports car are —
 - (A) Wire wheel
 - (B) Disc wheel
 - (C) Aluminium alloy steel
 - (D) Magnesium alloy wheel
- 53. In case of wire wheel the vehicle weight is supported by the wires in -
 - (A) Tension
- (B) Shear
- (C) Compression
- (D) Bending
- 54. The term 'ply rating' with reference to a tyre refers to the-
 - (A) Aspect ratio
 - (B) Rated strength
 - (C) Actual number of plies
 - (D) Recommended inflation pressure
- 55. The purpose of tyre is to—
 - (A) Increase tread life
 - (B) Decrease noise level
 - (C) Increase traction
 - (D) Provide softer ride

144 Mech. Engg.
56. Trea distortion in tyre is least on—
(A) Radial tyres
(B) Crossply tyre (C) Crossply belted tyres
(C) Crossply belted tyres (D) None of these
, ,
57. An overinflated tyre will wear the treat most
near the—
(A) Edges (B) Corners
(C) Outside (D) Centre
58. 'Heel and toe Wear' in tyre is caused by-
(A) Over-inflation
(B) Under-inflation
(C) Excessive camber
(D) Excessive acceleration and braking
59. The purpose of tyre rotation in automobile is
to—
(A) Equalize wear
(B) Avoid ply separation
(C) Get better ride
(D) None of the above

- e is nation is the — (A) Heating of the charge (B) Cooling of the charge (C) Reducing the quantity of aromatics in the fuel used (D) Locating spark plug at one end of the 60. The turning circle for a car is approxicombustion chamber mately — Octane number of Indian lead-free petrol is— (A) 1 meter (B) 2 meters (A) Less than octane number of leaded petrol (C) 10 meters (D) 25 meters (B) Equal to octane number of leaded petrol 61. Most popular manual steering gear for cars (C) Greater than octane number of leaded today is petrol (A) Rank and pinion type
- (D) Worm and nut type 62. The object of air conditioning a car is to control therein the-
- (A) Temperature and pressure (B) Pressure and humidity (C) Humidity and temperature
 - (D) None of these

(C) Naphthalene

(B) Cam and roller type

(C) Worm and wheel type

- 63. The best hydrocarbons from detonation viewpoint are —
- (A) Olefins (B) Paraffins

(D) Aromatics

- The calorific value of gasoline is about—
 - (B) 45 kJ/kg (A) 45 J/kg (C) 45 MJ/kg (D) 45 GJ/kg

- The process in which higher hydrocarbons are decomposed into smaller hydrocarbons is called— (A) Cracking (B) Reforming (C) Polymerisation (D) Alkylation
- The Octane number of iso-octane is— (A) 10 (B) 50
 - (C) 100 (D) 150
- One effect of detonation is—
 - (A) Delay in ignition
 - (B) Loss of Power
 - (C) Interruption in lubrication
 - (D) Deterioration in the quality of air fuel mixture
- 68. An effective method for prevention of deto-

- (D) Not satisfied
- The use of tetraethyl lead in gasolines is being gradually discontinued because —
 - (A) It has bad odour
 - (B) It is costly
 - (C) It decreases the engine efficiency
 - (D) It blocks the catalytic converter
- An indication of ignition quality of a diesel fuel is given by —
 - (A) Octane number (B) Detonation
 - (C) Cetane number (D) Preignition
- The primary function of lubrication is to—
 - (A) Reduce wear
 - (B) Provide cleaning action
 - (C) Provide cooling effect
 - (D) Provide sealing action

(B) 50°C

(D) 90°C

- 73. From the oil pump oil goes directly to— 82. Thermostat valve starts to open at about— (A) Oil filter (A) 20°C (B) Oil gallery (C) Oil stainer (C) 80°C (D) Main bearings 74. Maximum oil pressure in the lubrication 83. Coolant pumps are of system is controlled by-(A) Vane type (A) Pump rotor (B) Reciprocating type (B) Oil filter (C) Centrifugal type (C) Pressure switch (D) All of the above types (D) Pressure relief valve The most important characteristics of a lubricating oil is its-(A) Physical stability (B) Chemical stability (C) Resistance against corrosion (D) Viscosity The friction that occurs between the layers of oil in an oil film is called-(A) Boundary friction (B) Greasy friction (C) Viscous friction (D) Solid friction 77. The lubrication system in all modern cars has— (A) Oil cooler (B) Rotor type pump (C) Gear type pump (D) Oil filter 78. On leaving the engine the coolant goes to— (A) Pump inlet (B) Header tank (C) Collector tank (D) None of these The radiator core is made of—
- The purpose of fan is to— (A) Draw air through the radiator (B) Provide drive to the coolant pump (C) Increase flow of coolant (D) Cool the engine by blowing air over it Cooling fans are driven by— (A) Electricity and belts (B) Chains and gears (C) Gears and belts (D) By all of the above Engine overheating may result due to— (A) Broken fan belt (B) Thermostat stuck open (C) Radiator pressure cap stuck closed (D) Excess coolant in the system 87. Small holes in the pump body provide a vent for— (A) Fuel (B) Oil (C) Water (D) Air 88. The most widely used fuel supply system for car engines is the -(A) Brass (B) Steel (A) Gravity system (B) Pump system (D) Plastic (C) Cast iron (C) Vacuum system (D) Pressure system A pressure cap contains a— 89. The most accurate petrol injection system is (A) Thermostat valve the — (B) Blow-off valve (A) Manifold injection (C) Pressure valve (B) Direct injection (C) Port injection (D) Pressure and vacuum valve (D) Throttle body injection 81. The purpose of thermostat is to keep the engine-The throttle valve controls the supply of— (A) Hot (A) Fuel only (B) Cool (B) Air fuel mixture (C) Air only (C) At desired temperature (D) None of the above (D) None of these

91. The amount of fuel delivered by the injector	98. The compression ratio in an automotive diesel
depends upon the—	engine is usually—
(A) Length of time the injector is open	(A) 7:1 (B) 15:1
(B) Size of injector nozzle	(C) 22:1 (D) 10:1
(C) Pressure pushing fuel through the injector	The most accurate dynamometer is the—
(D) All of the above factors	(A) Swinging field type
The venturi in the carburettor causes the—	(B) Hydraulic type
(A) Decrease of air velocity	(C) Eddy current type
(B) Decrease of fuel flow	(D) Prony brake type
(C) Decrease of manifold	100. Brake thermal efficiency for S.I. engines
(D) Increase of air velocity	usually varies between—
93. The choke is usually closed when the engine	(A) 25% and 30% (B) 30% and 60%
is—	(C) 50% and 70% (D) More than 75%
(A) Cold (B) Hot	Answers
(C) Idling (D) Accelerating	21115 WCLS
94. When the choke is applied the fuel comes out	1. (C) 2. (A) 3. (D) 4. (B) 5. (A)
from the —	6. (B) 7. (D) 8. (B) 9. (C) 10. (B)
(A) Main jet	11. (B) 12. (C) 13. (D) 14. (D) 15. (C)
(B) Idle port	16. (A) 17. (A) 18. (B) 19. (B) 20. (B)
(C) Progression hole	21. (A) 22. (D) 23. (C) 24. (B) 25. (B)
(D) Transfer port	26. (A) 27. (A) 28. (C) 29. (B) 30. (B)
•	31. (D) 32. (B) 33. (D) 34. (D) 35. (C)
 The carburettor provides the correct quality of air-fuel mixture during — 	36. (A) 37. (D) 38. (B) 39. (D) 40. (D)
(A) Acceleration (B) Starting	41. (B) 42. (C) 43. (B) 44. (C) 45. (B)
(C) Idling (D) All condition	46. (B) 47. (D) 48. (B) 49. (D) 50. (C)
	51. (B) 52. (D) 53. (A) 54. (B) 55. (C)
96. The drive for the mechanical fuel pump is	56. (A) 57. (D) 58. (D) 59. (A) 60. (C)
taken from the—	61. (A) 62. (C) 63. (D) 64. (C) 65. (A)
(A) Cam shaft (B) Crank shaft	66. (C) 67. (B) 68. (B) 69. (B) 70. (D)
	71. (C) 72. (A) 73. (A) 74. (D) 75. (D)
	76. (C) 77. (D) 78. (B) 79. (A) 80. (D)
(D) None of these	91 (C) 92 (C) 93 (C) 94 (A) 95 (A)

81. (C)

86. (A)

91. (D)

97. The ignition temperature of diesel fuel is

(C) 500°C (D) 700°C

(B) 400°C

about-

(A) 300°C

82. (C)

87.(A)

92.(D)

96. (A) 97. (B) 98. (C) 99. (A) 100. (A)

83.(C)

88.(B)

93. (A)

84. (A)

89.(C)

94. (A) 95. (D)

85. (A)

90.(B)


Model Set - 1


- If a system is in thermodynamic equilibrium with the surroundings, then—
 - (A) The energy will transfer from surrounding to the system
 - (B) The energy will transfer from system to surroundings
 - (C) The energy transfer will not take place
 - (D) Both energy and mass transfer take place
- Heat pump is a device which—
 - (A) Converts heat energy into mechanical
 - (B) Converts mechanical energy into heat energy
 - (C) Delivers the heat from low temperature to a high temperature in a cyclic process
 - (D) Delivers the heat from high temperature to a low temperature in a cyclic process
- 3. Boyle's law states that for a given mass of perfect gas—
 - (A) Volume is proportional to temperature
 - (B) Volume is proportional to pressure
 - (C) Pressure it proportional to temperature
 - (D) Volume is inversely proportional to pressure
- Charle's law states that for a given mass of perfect gas-
 - (A) Volume is proportional to pressure
 - (B) Volume is proportional to temperature
 - (C) Volume is inversely proportional to temperature
 - (D) Volume is inversely proportional to
- 5. The general gas equation is given as-
 - (A) PV = mT
- (B) $\frac{P}{V} = mT$
- (C) PV = mRT (D) $\frac{P}{V} = mRT$


- In S.I. units pressure is expressed in—
 - (A) kgf/cm²
- (B) mm. of mercury
- (C) N/m² or bar
- (D) None of the above
- A perfect gas is one which obey's—
 - (A) All gas laws
 - (B) Only Boyle's law
 - (C) Only Charle's law
 - (D) None of the above
- In metric system the unit of heat is given as—
 - (A) C.H.U.
- (B) B.T.U.
- (C) k. cal
- (D) °kelvin
- 9. One physical atmosphere (atm) is equal to—
 - (A) 76 mm. of mercury
 - (B) 760 Torr
 - (C) 76 kg/cm²
 - (D) 76 N/m²
- The ratio of specific heat at constant pressure to specific heat at constant volume for air is equal to—
 - (A) 1·4
- (B) 1.04
- (C) ·14
- (D) 14
- The value of C_p for air is equal to—
 - (A) 2.38 k.cal/kg °K
 - (B) 0.024 k.cal/kg °K
 - (C) 2.238 k.cal/kg °K
 - (D) 0.424 k.cal/kg °K
- Gases have—
 - (A) Two specific heats
 - (B) Three specific heats
 - (C) One specific heat
 - (D) None of the above
- Change of enthalpy during a process is given
 - (A) $H_2 H_1 = mC_v (T_2 T_1)$
 - (B) $H_2 H_1 = mC_p (T_2 T_1)$
 - (C) $H_2 H_1 = m(C_p C_v)(T_2 T_1)$
 - (D) $H_2 H_1 = m \frac{R}{I} (T_2 T_1)$


- During throttling process the enthalpy—
 - (A) Remains constant
 - (B) Will decrease
 - (C) Will increase
 - (D) None of the above
- One kg. mol means—
 - (A) Mass of a gas of unit volume
 - (B) Mass of a gas equal to its molecular weight
 - (C) Mass of a gas at N.T.P.
 - (D) None of the above
- 16. Which law states that equal volumes of different gases at same temperature and pressure contain equal number of molecules?
 - (A) Joule's law
- (B) Avogadro's law
- (C) Regnault's law (D) Zeroth law
- 17. The value of universal gas constant (Ra) is equal to —
 - (A) 848 m kgf/kg.mol per °K
 - (B) 8.48 m kgf/kg.mol per °K
 - (C) 84·8 m kgf/kg.mol per °K
 - (D) ·848 m kgf/kg.mol per °K
- 18. If the temperature of the working substance does not change during the process, while its pressure and volume changes it is said to be-
 - (A) An adiabatic process
 - (B) An isothermal process
 - (C) A polytropic process
 - (D) A constant volume process
- Work done is zero in case of—
 - (A) Adiabatic process
 - (B) Polytropic process
 - (C) Constant volume process
 - (D) Isothermal process
- Heat can be transferred from low temperature body to high temperature body —
 - (A) Without the aid of external work
 - (B) With the aid of external work
 - (C) Both with or without the aid of external work
 - (D) Not possible in any case
- 21. Total heat supplied at constant volume is given by the relation—
 - (A) $Q = m \times C_p \times (T_2 T_1)$
 - (B) $Q = m \times R (T_2 T_1)$

- (C) $Q = m C_v (T_1 + T_2)$
- (D) $Q = m C_v (T_2 T_1)$
- Which one represents adiabatic process on T– φ diagram ?

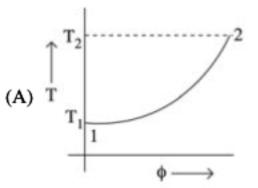

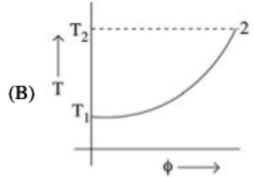

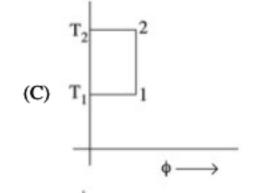



- 23. Change in enthalpy for a small change in temperature (ΔT) is expressed by the relation for a unit mass-
 - (A) $\Delta H = \frac{R}{I} \Delta T$
- (B) $\Delta H = R \Delta T$
- (C) $\Delta H = C_{\nu} \Delta T$
- (D) $\Delta H = C_p \Delta T$
- Internal combustion engine works on—
 - (A) First law of thermodynamics
 - (B) Second law of thermodynamics
 - (C) Zeroth law of thermodynamics
 - (D) None of the above

- 25. The action of the brake in stopping the fly wheel by friction is—
 - (A) Reversible process
 - (B) Irreversible process
 - (C) Isentropic process
 - (D) Cannot be predictable
- Efficiency of the cycle is the ratio of—
 - Heat supplied (A) Heat rejected
 - Heat rejected
 - (B) Heat supplied
 - Heat supplied Heat rejected (C)
 - Heat supplied
 - Heat supplied
 Heat supplied Heat rejected
- In dual combustion cycle the combustion takes place —
 - (A) At constant volume
 - (B) At constant pressure
 - (C) Partly at constant volume and partly at constant pressure
 - (D) None of the above
- 28. The Carnot efficiency is given by the relation —

 - (A) $\frac{T_1 + T_2}{T_1 T_2}$ (B) $\frac{T_1 T_2}{T_1 + T_2}$
 - (C) $\frac{T_1 T_2}{T_1}$ (D) $\frac{T_1}{T_1 T_2}$
- 29. For calculating air standard efficiency the working fluid is—
 - (A) Diesel
- (B) Petrol
- (C) Air
- (D) Steam
- Refrigeration system works on—
 - (A) Otto cycle
 - (B) Constant pressure cycle
 - (C) Carnot cycle
 - (D) Bell coleman cycle
- The air standard efficiency of Ericssion cycle for same temperature limits is equal to the efficiency of—
 - (A) Otto cycle
- (B) Rankine cycle
- (C) Carnot cycle
- (D) Dual cycle
- Joule cycle is also known as—
 - (A) Eriction cycle
 - (B) Otto cycle

- (C) Carnot cycle
- (D) Brayton cycle
- The change of entropy is given mathematically—
 - (A) $\int_{1}^{2} P dV$ (B) $\int_{1}^{2} T$
- - (C) $\int_{1}^{2} \frac{dQ}{T}$
- (D) $\int_{1}^{2} \frac{1}{d\Omega}$
- The unit of entropy is—
 - (A) Nm
- (B) Joules Nm/kg.°K
- (C) kJ/K
- (D) Nm/°K
- 35. When a gas is heated in any general manner the change in entropy is given by?
 - (A) $\phi_2 \phi_1 = \frac{R}{J} \log_e \frac{V_2}{V_1} + C_v \log_e \frac{T_2}{T_1}$
 - (B) $\phi_2 \phi_1 = C_p \log_e \frac{V_2}{V_1} + C_v \log_e \frac{T_2}{T_1}$
 - (C) $\phi_2 \phi_1 = C_v \log_e \frac{V_2}{V_1} + C_p \log_e \frac{T_2}{T_1}$
 - (D) $\phi_2 \phi_1 = C_v \log_e \frac{V_2}{V_1} + \frac{R}{J} \log_e \frac{T_2}{T_1}$
- In reversible adiabatic process the change in entropy is -
 - (A) Maximum
- (B) Minimum
- (C) Zero
- (D) Variable
- Change in entropy depends on—
 - (A) Mass transfer
- (B) Heat transfer
- (C) Temperature
- (D) None of the above
- 38. Which one is natural solid fuel?
 - (A) Charcoal
- (B) Coke
- (C) Peat
- (D) None of the above
- 39. The temperature of 0.5 kg. of a gas at the begining of an adiabatic expansion is 427°C and at the end is 27°C. The change in entropy is equal to—
 - (A) $0.5 \times [700 300]$
 - (B) Zero
 - (C) $0.5 \times [427 + 27]$
 - (D) $0.5 \times C_p \times \int \frac{427}{27}$
- Coke is prepared from—
 - (A) Peat
- (B) Wood
- (C) Bituminous
- (D) Producer gas

- 41. The area under the curve on temperature entropy diagram represents—
 - (A) Work done during the process
 - (B) Change in entropy
 - (C) Heat transfer for irreversible process
 - (D) Heat transfer for reversible process
- 42. 100 kg of air contains—
 - (A) 21 kg of oxygen
 - (B) 35 kg of oxygen
 - (C) 23 kg of oxygen
 - (D) 73 kg of oxygen
- In an isothermal process—
 - (A) Heat supplied = work done
 - (B) Heat supplied = change in internal energy
 - (C) Heat supplied = work done + change in internal energy
 - (D) None of the above
- 44. When the fluid suddenly expands into vacuum chamber through a large orifice the process is known as—
 - (A) Throttling process
 - (B) Adiabatic process
 - (C) Isentropic process
 - (D) Free expansion
- 45. Relation between P, V and T for a polytropic process is given by -


(A)
$$\frac{T_1}{T_2} = \left(\frac{V_2}{V_1}\right)^{n-1} = \left(\frac{P_1}{P_2}\right)^{\frac{n-1}{n}}$$


(B)
$$\frac{T_1}{T_2} = \left(\frac{V_2}{V_1}\right)^{n-1} = \left(\frac{P_2}{P_1}\right)^{\frac{n-1}{n}}$$


(C)
$$\frac{T_1}{T_2} = \left(\frac{V_1}{V_2}\right)^{n-1} = \left(\frac{P_1}{P_2}\right)^{\frac{n-1}{n}}$$


(D)
$$\frac{T_1}{T_2} = \left(\frac{V_2}{V_1}\right)^{\frac{n-1}{n}} = \left(\frac{P_1}{P_2}\right)^{n-1}$$

46. The polytropic process on P-V diagram is represented by the figure -

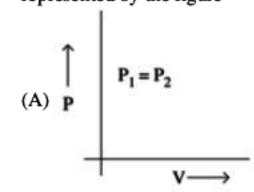

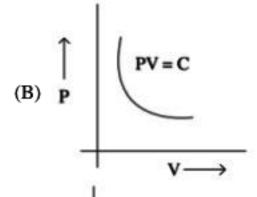





- Carnot cycle consists of—
 - (A) Two reversible adiabatic and two isothermal processes
 - (B) Two adiabatic and two constant volume processes
 - (C) Two adiabatic and two constant pressure processes
 - (D) Two isothermal and two constant pressure processes
- Gas turbine works on—
 - (A) Constant Volume cycle
 - (B) Otto cycle
 - (C) Ericsson cycle
 - (D) Joule cycle
- 49. Which fuel has the maximum percentage of carbon?
 - (A) Wood
- (B) Coke
- (C) Lignite
- (D) Bituminous coal
- 50. The dryness fraction is given by the relation—
- (A) $\frac{W + \omega}{W}$ (B) $\frac{W \omega}{W}$ (C) $\frac{W}{W + \omega}$ (D) $\frac{W + \omega}{W \omega}$

- 51. When water is heated at constant pressure till it reaches its boiling point the heat added during the process is known as—
 - (A) Latent heat
- (B) Sensible heat
- (C) Super heat
- (D) Specific heat
- 52. During the superheating of the steam at constant pressure, the -
 - (A) Temperature of the steam remains cons-
 - (B) Temperature of the steam does not remain constant
 - (C) Internal energy of steam remains constant
 - (D) Enthalpy remains constant
- 53. If the temperature of steam formed at atmospheric pressure is 110°C, the steam formed is—
 - (A) Wet
- (B) Dry and saturated
- (C) Super heated
- (D) Unpredictable
- During the transformation of water into steam, the temperature remains constant, the heat added is known as—
 - (A) Liquid heat
 - (B) Total heat
 - (C) Latent heat of steam
 - (D) Specific heat
- Separating and throttling calorimeter is used for determining —
 - (A) Calorific value of fuel
 - (B) Dryness fraction of steam
 - (C) Specific heat of water
 - (D) Viscosity of oil
- The calorimeter used for finding out accurate dryness fraction of steam is—
 - (A) Barrel calorimeter
 - (B) Separating calorimeter
 - (C) Throttling calorimeter
 - (D) Combined separating and throttling calorimeter
- 57. A closed vessel containing water or any thermal liquid that is heated or vaporised and then removed is known as a-
 - (A) Boiler
- (B) Re-Boiler
- (C) Accumulator
- (D) None of the above

- 58. When the steam is produced at a critical pressure and temperature of a boiler, the density of the steam produced is-
 - (A) More than water (B) Less than water
 - (C) Equal to water (D) None of the above
- 59. A positive circulation boiler is that in which—
 - (A) The water or steam is forced through the boiler circuit
 - (B) The flue gases are forced through the boiler circuit
 - (C) Draught is produced with the help of exhaust steam
 - (D) None of the above
- 60. In a binary vapour cycle the medium used for the energy transfer is —
 - (A) Steam alone
 - (B) Mercury
 - (C) Steam and mercury
 - (D) None of the above
- 61. The maximum percentage recovery of heat energy from the flue gases take place in —
 - (A) Superheater
- (B) Air preheater
- (C) Economiser
- (D) Steam ejector
- 62. Factor of evaporation is given by the relation-
 - (A) $\frac{H-h\omega}{}$
 - $\frac{I h \omega}{539} \qquad (B) \frac{H + h \omega}{539}$

 - (C) $\frac{H + L + h \omega}{539}$ (D) $\frac{H + L h \omega}{539}$
- The term heating surface in boiler means—
 - (A) The area of grate
 - (B) Volume of the furnace
 - (C) The surface area which is in contact with the flue gases
 - (D) The outer surface area of the shell
- The capacity of boiler is defined as—
 - (A) The volume of feed water inside the shell
 - (B) The volume of the steam space inside the shell
 - (C) The maximum pressure at which steam can be generated
 - (D) Amount of water converted into steam from 100°C in one hour

- 65. The scale formation in the boiler is due to-
 - (A) Presence of suspended impurities in the water
 - (B) Presence of sulphur contents in the fuel
 - (C) Presence of chemical impurities in the water
 - (D) Excessive moisture contents in the air
- 66. The function of precipitator in the boiler is-
 - (A) To control water particles in steam
 - (B) To minimise the ash particles in the flue gases escaping through chimney
 - (C) To control chemical impurities in feed water
 - (D) To control the rate of combustion of fuel
- For the safety of boiler which of the mounting is provided more than one in number.
 - (A) Fusible plug
 - (B) Safety valve
 - (C) Feed check valve
 - (D) Steam stop valve
- 68. The term priming in a boiler means-
 - (A) The firing of boiler
 - (B) The removal of air from the boiler shell
 - (C) The formation of bubbles in the boiler shell
 - (D) The flow of flue gases through the boiler
- The maximum heat loss in a boiler occurs due to—
 - (A) Heat carried away by the flue gases passing through the chimney
 - (B) Unburnt fuel in ash
 - (C) Leakage of steam
 - (D) Moisture contents in air
- The feed water injector is operated by the—
 - (A) Electric motor (B) Steam engine
 - (C) Steam turbine (D) None of the above
- 71. The function of steam trap is-
 - (A) To control the supply of steam
 - (B) To blow off excess of steam
 - (C) To drain off water resulting from condensations of steam from steam pipes
 - (D) To prevent dust particles going with steam

- The type of safety valve recommended for high pressure boiler is—
 - (A) Dead weight safety valve
 - (B) Lever safety valve
 - (C) Spring loaded safety valve
 - (D) None of the above
- 73. If the diameter of fuel tubes and water tubes is same, then the heating surface will be—
 - (A) More in case of water tube boiler
 - (B) More in case of fire tube boiler
 - (C) Same in water tube as well as fire tube boiler
 - (D) Unpredictable
- 74. Theoretical mean effective pressure (P_m) of steam engine is given by the relation—

(A)
$$P_m = \frac{P_1(1 - \log_e r)}{r} - P_b$$

(B)
$$P_m = \frac{P_1(1 + \log_e r)}{r} - P_b$$

(C)
$$P_m = \frac{P_1(1 + \log_e r)}{r} + P_b$$

(D)
$$P_m = \frac{P_1(1 - \log_e r)}{r} + P_b$$

 Indicated horse power developed inside the steam engine cylinder is given by the relation—

(A) I.H.P. =
$$\frac{P_{\rm m} LAN}{75 \times 60}$$

(B) I.H.P. =
$$\frac{2P_{\rm m} LAN}{75 \times 60}$$

(C) I.H.P. =
$$\frac{4P_{\rm m} LAN}{75 \times 60}$$

(D) I.H.P. =
$$\frac{2P_{\rm m} LAN}{60}$$

- The linear motion of the piston is converted into rotory motion by the—
 - (A) Crank
- (B) Piston rod
- (C) Connecting rod (D) Cross-head
- Weight per H.P. of compound steam engine as compared to simple steam engine is—
 - (A) More
 - (B) Less
 - (C) Equal
 - (D) Depending on the inlet pressure of steam

- 78. If 'L' is the stroke length and r is the crank 87. The firing order of a six cylinder engine is radius then—
 - (A) L = r
- (B) L = 4r
- (C) $L = \frac{1}{2}$
- (D) L = 2r
- I.C. engine works on—
 - (A) Zeroth law of thermodynamics
 - (B) Second law of thermodynamics
 - (C) First law of thermodynamics
 - (D) None of the above
- 80. The thermal efficiency of an I.C. engine is in the range of—
 - (A) 10 to 15%
- (B) 15 to 20%
- (C) 20 to 25%
- (D) 35 to 45%
- In two stroke engine the cycle is completed in—
 - (A) Four revolution of the crank shaft
 - (B) Two revolution of the crank shaft
 - (C) One revolution of the crank shaft
 - (D) Half revolution of the crank shaft
- 82. Compression ratio of an engine is given the relation —

 - (A) $CR = \frac{V_c}{V_s}$ (B) $CR = \frac{V_c + V_s}{V_c}$

 - (C) $CR = \frac{V_s V_c}{V_c}$ (D) $CR = \frac{V_c}{V_s + V_c}$
- 83. The gap between electrodes of a spark plug is about-
 - (A) 0·1 mm
- (B) 0·6 mm
- (C) 6 mm
- (D) 0.06 mm
- 84. Which of the following is related to the secondary circuit of an ignition system?
 - (A) Primary coil
- (B) C.B. points
- (C) Spark plug
- (D) Ignition switch
- 85. The percentage of heat carried away by the cooling system is—
 - (A) 80% of the total heat supplied
 - (B) 60% of the total heat supplied
 - (C) 30% of the total heat supplied
 - (D) 10% of the total heat supplied
- The function of a radiator is to—
 - (A) Cool the lubricating oil
 - (B) Cool the hot water from the engine jacket
 - (C) Supply air for cooling
 - (D) Filter water used for cooling

- - (A) 1-5-3-4-2-6
 - (B) 1 2 3 4 5 6
 - (C) 6-5-1-2-3-4
 - (D) 1-3-2-5-4-6
- 88. For good lubrication the oil used should have —
 - (A) Low flash point
 - (B) Low viscosity index
 - (C) High viscosity index
 - (D) Low pour point
- During starting the gasoline engine requires—
 - (A) Rich mixture
 - (B) Weak mixture
 - (C) Chemically correct mixture
 - (D) Very lean mixture
- 90. The SAE number of lubricating oil represents-
 - (A) The viscosity range
 - (B) Its flash point
 - (C) Its pour point
 - (D) None of the above
- The function of an injector is—
 - (A) To vaporise the diesel oil
 - (B) To atomise the diesel oil
 - (C) To mix diesel oil with air
 - (D) To inject lubricating oil
- The cetane number of alpha-methylnapthalene is-
 - (A) 100
- (B) 70
- (C) 0
- (D) 90
- The octane number rating indicates the antiknock a quality of a-
 - (A) Coal fuel
- (B) Diesel oil
- (C) Gasoline fuel
- (D) Wood fuel
- Pre-ignition occurs in a—
 - (A) Diesel engine (B) Steam engine
 - (C) Gasoline engine (D) Steam turbine
- By using high octane number fuel the—
 - (A) Changes of knocking will increase
 - (B) Higher compression ratio can be used
 - (C) Thermal efficiency will decrease
 - (D) Volumetric efficiency will increase
- The nucleus of an atom consists of—
 - (A) Protons and electrons
 - (B) Protons and neutrons

154 | Mech. Engg. (C) Neutrons and electrons (D) None of the above Each proton carries a single unit— (A) Positive charge (B) Negative charge 107. When a closely coiled spring is subjected to (C) Neutral charge (D) Unpredictable an axial load, it is said to be under— Each electron carries a single unit— (A) Bending (B) Shear (A) Negative charge (B) Positive charge (C) Torsion (D) All of these (C) Neutral charge (D) None of the above 108. Polar moment of inertia of a solid shaft of The method of identifying the element is diameter (D) is— (B) X^{AZ} (A) zXA (A) $\frac{\pi}{16} \times D^3$ (B) $\frac{\pi}{16} \times D^4$ (C) _AX^Z (D) X^{A/Z} (C) $\frac{\pi}{32} \times D^3$ (D) $\frac{\pi}{32} \times D^4$ Where X is the symbol for an element. The compound nucleus has— When a solid shaft is subjected to torsion, the (A) Kinetic energy shear stress induced in the shaft at its centre (B) Binding energy of bombarding particles is— (C) Both kinetic and binding energy of (A) Zero (B) Minimum bombarding particles (C) Maximum (D) Average (D) None of the above Maximum deflection of a cantilever is equal The slenderness ratio of a long column is to — (A) 10–20 (B) 20–30 (A) (C) 50-60 (D) Above 80 The value of Rankine's constant for mild steel (C) 8EI (A) $\frac{1}{9000}$ (B) $\frac{1}{7500}$ Answers 1. (C) 2. (C) 3. (D) 4.(B) 6. (C) 7.(A) 8.(C) 9.(B) 11. (C) 12.(A) 13.(B) 14. (A) In a simply reinforced beam, the reinforce-16. (B) 17.(A) 18.(B) 19.(C) ment is provided in — 21. (D) 22. (C) 23. (D) 24. (A) (A) Tensile zone (B) Compressive zone (C) Neutral zone (D) Anywhere 26. (C) 27. (C) 28.(C) 29. (A) 31. (C) 32.(D) 33.(C) 34.(C) 104. A riveted joint may fail due to— 36. (C) 37. (B) 38.(C) 39.(B) (A) Shearing of rivets 41. (D) 42. (C) 44. (D) 43. (A) (B) Crushing of rivets 46. (D) 47.(A) 48.(C) 49.(B) (C) Tearing of the plates 51. (B) 53.(C) 54.(C) 52. (B) (D) All of these 58.(C) 59. (A) 56. (D) 57. (B) 61. (C) 62.(A) 63.(C) 64. (D) The deflection of a closely-coiled helical 66. (B) 67. (B) 68.(C) 69. (A) spring of diameter (D) subjected to an axial 71. (C) 72. (C) 73. (A) 74.(B) load (W) is-77. (B) 76. (A) 78. (D) 79.(C) 64 WR³n

5.(C)

10. (A)

15.(B)

20.(B)

25.(B)

30. (D)

35. (A)

40.(C)

45. (A)

50.(C)

55.(B)

60.(C)

65.(C)

70. (D)

75.(B)

80. (D)

85.(C)

90. (A)

95.(B)

84.(C)

89. (A)

94.(C)

99.(C) 100.(C)

104. (D) 105. (A)

109. (A) 110. (C)

81. (C)

86. (B)

91. (B)

96. (B)

(C) $\frac{64 \text{ WR}n}{\text{C}d^4}$

106. In a leaf spring, maximum bending stress

developed in the plates is—

82. (B)

87.(A)

92. (B)

97.(A)

101. (D) 102. (B) 103. (A)

106. (C) 107. (C) 108. (D)

83.(B)

88.(C)

93.(C)

98. (A)

Model Set - 2

10. Which of the element is natural radio-

1. Which one is fertile material-

	(A)	U-235	(B)	U-239		activ	ve—		
		U-233		U-238		(A)	Radium	(B)	Thorium
2.		radiation emitted				(C)	Uranium	(D)	All of the above
		Two type		Three type	11.	In b	oiling water react	tor ste	eam is generated—
		* *		None of above		(A)	In the reactor ve	ssel	
3.	-	term PWR stands				. ,	In the boiler		
Э.		Power Water Re					In the heat excha	-	:
		Pressurized Water				(D)	None of the abo	ve	
				actor	12.	The	pressurized wate	r rea	ctor uses light water
	_	Power Welding Power Work Rea				as-			
	. ,						Coolant		
4.	In se	odium graphite i	eact	or the coolant used			Moderator		1t
		Water	(B)	Graphite			Both moderator None of the abo		coorant
				Liquid-sodium		-			
5		•		•	13.	The as—		at co	onduction is known
٥.	is—	coorant used in	ап	uclear power plant			Newton's law	(B)	Fourier's law
		Heavy water	(B)	Freon			Regnault's law		Dalton's law
		Carbon dioxide					•		
6.		material used for		-	14.		unit of thermal c		. •
0.		Cast iron		Stainless steel			cal m ⁻¹ k ⁻¹ s ⁻¹	(B)	
		Mild steel	(D)			(C)	cal k ⁻¹ s ⁻¹	(D)	cal m ⁻¹ s ⁻¹
7				• •	15.			ance	is given by the
7.	plan		used	l in a nuclear power	relation—				
	-	Uranium	(B)	Plutonium		(A)	$R_c = \frac{x}{kA}$	(B)	$R_c = \frac{A}{xk}$
				Oxygen			742 2		344
0			-			(C)	$R_c = \frac{k}{\Delta_r}$	(D)	$R_c = x.k.A$
٥.		isodium grapnik lis—	rea	ctor, the moderator	16	16. The unit of film heat transfer coeffic			
		Heavy water	(B)	Light water	10.		k.cal./m ²		
		*	-	None of the above			k.cal./m ² /hr/K		
9.		material used for			17				
۶.		Concrete	SINC	iding a core is—	17.		•		quilibrium then—
			d cha	ata			Emissivity = abs	_	•
		Thick galvanized	a sile	Cis			Emissivity > abs	_	•
		Copper sheets					Emissivity < abs	_	ivity
	(D)	Aluminium shee	ts			(D)	None of the abo	ve	

156	Mech. Engg.	
18.	The dimension of force is— (A) [M ² LT ²] (B) [ML ² T ⁻²] (C) [MLT ⁻²] (D) [M ⁻¹ LT]	28. Which of the refrigerant is more toxic? (A) Freon-12 (B) Freon-22 (C) Ammonia (D) Carbon dioxide
	With the help of fans the heat transfer can be increased by— (A) 4 times (B) 6 times (C) 8 times (D) 10 times	 29. Which of the following refrigerant is more costly? (A) Ammonia (B) Carbon dioxide (C) Methyl chloride
	The latent heat of ammonia is— (A) 540 k.cal./kg (B) 314 k.cal./kg (C) 50 k.cal./kg (D) 81 k.cal./kg A refrigerant should have— (A) High specific heat (B) High specific volume	(D) Freon-12 30. The boiling point of carbon dioxide a atmospheric pressure is— (A) -30°C (B) -78·5°C (C) -29·8°C (D) -40·8°C 31. Relative C.O.P. is equal to—
	(C) High latent heat (D) High boiling point	(A) Actual C.O.P. Work input Net refrigerating effect
22.	Which of the refrigerant has lowest boiling temperature? (A) Carbon dioxide (B) Ammonia (C) Freon-12 (D) Freon-22	(C) Work input Actual C.O.P. Theoretical C.O.P. Theoretical C.O.P.
23.	The chemical formula of Freon-12 is— (A) CCl ₄ (B) CCl ₄ F ₂ (C) CHCl ₂ F (D) C ₂ H ₅ Cl	Actual C.O.P. 32. The unit for refrigerating effect is— (A) Kelvin (K) (B) k.cal./min. (C) k.cal. (D) k.cal/J
24.	The boiling point of Freon-12 at atmospheric pressure is— (A) 100°C (B) 29·8°C (C) -50°C (D) -29·8°C	33. C.O.P. is always— (A) More than one (B) Less than one (C) Equal to one (D) Unpredictable
25.	Which of the following refrigerant has maximum latent heat? (A) Sulpher dioxide (B) Carbon dioxide (C) Ammonia	34. Aqua ammonia is the solution of ammonia and— (A) Freon-12 (B) Freon-22 (C) Water (D) Carbon dioxide 35. The common refrigerant used in domestic
26.	(D) Dichloro-difloro-methaneWhich of the following is known as dry ice?(A) Solid carbon dioxide(B) Liquid ammonia	refrigerator is— (A) Ammonia (B) Sulphur dioxide (C) Freon (D) Carbon dioxide
27.	 (C) Milky coloured ice (D) Liquid sulphur dioxide The boiling point of sulphur dioxide at atmospheric pressure is— 	 36. The decrease in compressor suction pressure will— (A) Increase the C.O.P. (B) Decrease the C.O.P. (C) Decrease the work done by the com-

(A) +10°C

(C) −10°C

(B) −15°C

(D) +15°C

(C) Decrease the work done by the com-

pressor

(D) None of the above

- 37. The use of compressor is not required in-
 - (A) Vapour compression system
 - (B) Bell coleman refrigerator
 - (C) Vapour absorption system
 - (D) Air refrigeration system
- 38. Which of the following compressor does not have any moving part ?
 - (A) Reciprocating (B) Rotary
 - (C) Thermo
- (D) Centrifugal
- The percentage of oxygen by volume in air is equal to—
 - (A) 32%
- (B) 23%
- (C) 21%
- (D) 12%
- 40. In evaporative cooling-
 - (A) Sensible heat is added to the air
 - (B) Latent heat removed from the air
 - (C) Air is cooled and humidified
 - (D) Air is cooled and dehumidified
- 41. The boiling of refrigerant takes place in the-
 - (A) Compressor
- (B) Condenser
- (C) Evaporator
- (D) None of the above
- The function of an intercooler is to—
 - (A) Cool the lubricating oil
 - (B) Cool the cylinder body
 - (C) Cool the compressed air between the stages
 - (D) Cool the inlet air before suction
- 43. Free air delivered (F.A.D.) is the air at-
 - (A) 0°C
 - (B) 0°C and 1 kg/cm² pressure
 - (C) 1.0332 kg/cm2 abs. and 15°C
 - (D) 273°C and 1 kg/cm² pressure
- 44. The volumetric efficiency of a reciprocating compressor is equal to—

(A)
$$1 + k - k \left(\frac{P_2}{P_1}\right)$$
 (B) $1 + k + k \left(\frac{P_2}{P_1}\right)^{1/n}$

(C)
$$1 + k - k \left(\frac{P_2}{P_1}\right)^{1/n}$$
 (D) $1 + k - k \left(\frac{P_2}{P_1}\right)^n$

45. The volumetric efficiency of an air compressor is the ratio of—

- (A) Displacement volume to clearance volume
- (B) Displacement volume to volume of air sucked inside the cylinder
- (C) Volume of air sucked to the displacement volume
- (D) Volume of air before compression to the volume of air after compression
- 46. The loss due to drift in cooling tower is-
 - (A) 5 to 10 %
- (B) 10 to 15%
- (C) 30 to 40%
- (D) 40 to 50%
- The number of air change per hour recommended for restaurant kitchens are—
 - (A) 10
- (B) 25
- (C) 15
- (D) 5
- 48. Rotary compressors are used for producing -
 - (A) Large quantity of air at high pressure
 - (B) Large quantity of air at low pressure
 - (C) Small quantity of air at low pressure
 - (D) Small quantity of air at high pressure
- Rotary compressors are used to compress fluids upto—
 - (A) 10 kg/cm²
- (B) 1.0 kg/cm²
- (C) 50 kg/cm²
- (D) 100 kg/cm²
- The maximum capacity of a reciprocating compressor is—
 - (A) 100 m³/min
- (B) 200 m³/min
- (C) 300 m³/min
- (D) 1000 m³/min
- The work done will be least if the compressor is—
 - (A) Isothermal
- (B) Polytropic
- (C) Isentropic
- (D) None of the above
- The work done to compress a unit mass of air will be minimum when—
 - (A) n = 1
- (B) n > 1
- (C) n < 1
- (D) n = r
- The type of compressor used in an aeroplane is—
 - (A) Reciprocating
- (B) Centrifugal
- (C) Axial flow
- (D) Root blower
- The open cycle gas turbine works on—
 - (A) Otto cycle
- (B) Diesel cycle
- (C) Joule cycle
- (D) Dual cycle

- 55. In a gas turbine the air is compressed to a 61. The Jet propulsion engine is based on pressure of—
 - (A) 3 to 6 kg/cm²
 - (B) 30 to 60 kg/cm²
 - (C) 0.3 to 0.6 kg/cm²
 - (D) 10 to 15 kg/cm²
- The type of compressor used in gas turbine is—
 - (A) Reciprocating
 - (B) Rotary
 - (C) Centrifugal
 - (D) None of the above
- 57. The maximum permissible inlet temperature of a gas turbine is about—
 - (A) 500°C
- (B) 900°C
- (C) 1500°C
- (D) 2000°C
- 58. Constant volume gas turbine works on—
 - (A) Joule cycle
 - (B) Otto cycle
 - (C) Carnot cycle
 - (D) Atkinson cycle
- The size of a gas turbine plant can be reduced by using —
 - (A) An intercooler
 - (B) A reheater
 - (C) Combination of both, i.e. intercooler and reheater
 - (D) Any of the above
- 60. The ideal air standard efficiency of a Joule cycle is expressed as-

(A)
$$n = 1 - \frac{1}{r_p \frac{r-1}{r}}$$

(B)
$$n = 1 + \frac{1}{r_p \frac{r-1}{r}}$$

(C)
$$n = 1 - \frac{1}{r_p \frac{r+1}{r}}$$


(D)
$$n = 1 - \frac{1}{r_p \frac{r}{r - 1}}$$

- - (A) Newton's second and third laws of motion
 - (B) Newton's first law of motion
 - (C) Second law of thermodynamics
 - (D) Zeroth law of thermodynamics
- 62. Which one is not related to the rocket engine?
 - (A) Nozzle
 - (B) Combustion chamber
 - (C) Compressor
 - (D) Propellant
- The turbojet engines are rated on the basis of—
 - (A) Horse power
 - (B) Thrust
 - (C) Turbine efficiency
 - (D) None of the above
- 64. The best speed range for a turbojet engine is—
 - (A) 300 to 500 km/hour
 - (B) 200 to 400 km/hour
 - (C) 800 to 1800 km/hour
 - (D) 2000 to 5000 km/hour
- The rocket motor is cooled—
 - (A) By circulating water around the engine
 - (B) By providing fins on the engine walls
 - (C) By circulating fuel around the engine
 - (D) By injecting water in the combustion chamber
- The air fuel ratio used in a ram jet engine is—
 - (A) 5:1
- (B) 10:1
- (C) 15:1
- (D) 25:1
- The fuel used in solid propellant rocket is—
 - (A) Coal
 - (B) Kerosene
 - (C) Mixture of nitroglycerine and intra-cellulose
 - (D) Charcoal
- 68. The term cold engine is used for a rocket engine operating on-
 - (A) Monopropellant fuel-H₂O₂
 - (B) Bipropellant fuel
 - (C) Gasoline fuel
 - (D) Alcohol

- 69. The use of hydrogen peroxide in submarine engine is ideal because—
 - (A) It is economical propellant for producing propulsive power
 - (B) It provides the free oxygen for the combustion of fuel during sbmerged condition
 - (C) It releases large amount of heat during decomposition
 - (D) The temperature after its decomposition is very high
- 70. Which one of the following is more rigid?
 - (A) Cork
- (B) Chalk
- (C) Wood
- (D) Rubber
- Statics deals with forces—
 - (A) Which do not change the state of body at rest or in motion
 - (B) Which change the state of body
 - (C) Which cause motion of a body
 - (D) None of the above
- An internal force is that which—
 - (A) Causes a body to move
 - (B) Prevents a body from moving
 - (C) Produces internal stresses in the body
 - (D) Prevents a body from deformation
- A vector of unit length is known as—
 - (A) Free vector
- (B) Sliding vector
- (C) Fixed vector
- (D) Unit vector
- 74. Force is a—
 - (A) Scaler quantity
 - (B) Vector quantity
 - (C) Linear quantity
 - (D) Unpredictable
- 75. Bow's notation is used for representation of a-
 - (A) Mass
- (B) Velocity
- (C) Force
- (D) Couple
- The bell crank lever is a—
 - (A) Straight lever
 - (B) Compound lever
 - (C) Simple bent lever
 - (D) None of the above

- The director of resultant is given by relation—
 - (A) $\theta = \tan^{-1} \frac{\Sigma H}{\Sigma V}$
 - (B) $\theta = \tan^{-1} \frac{\Sigma V}{\Sigma H}$
 - (C) $\theta = \tan^{-1} \left(\frac{\Sigma H}{\Sigma V} \right)^2$
 - (D) $\theta = \tan^{-1} \Sigma H \times \Sigma V$
- The mass moment of inertia is the
 - (A) Second moment of force
 - (B) Second moment of mass
 - (C) Second moment of area
 - (D) None of the above
- In S.I. system, the unit for mass moment of inertia is—
 - (A) kg/m²
- (B) kg metre
- (C) kg m²
- (D) kg/metre
- 80. The radius of gyration of a circular section is equal to—
 - (A) $\frac{D}{2}$

- (D) $\frac{D}{4}$
- The centre of gravity of semi-circular figure is situated at a distance of-



- (A) $\frac{4r}{3\pi}$ from base (B) $\frac{3r}{4\pi}$ from base
- (C) $\frac{2r}{3\pi}$ from base (D) $\frac{3r}{2\pi}$ from base
- 82. The polar moment of inertia of a circular section is—
- πD^4 (C)
- (D) $\frac{\pi D^3}{64}$
- 83. The moment of inertia of a circular section about an axis X-Y as compared to moment of inertia about axis Y-Y is-
 - (A) More
- (B) Less
- (C) Same
- (D) None of the above

- 84. The moment of inertia of a triangle about its base is -
 - (A) $\frac{bh^3}{12}$
- (C) $\frac{bh^3}{36}$
- 85. The mass moment of inertia of a solid disc about the central axis is-
 - (A) $\frac{mR}{2}$
- (B) $\frac{mR^2}{2}$
- (C) $\frac{mR^3}{3}$ (D) $\frac{mR^2}{4}$
- The angle of friction 'φ' given by the relation —
 - (A) $\operatorname{Tan} \phi = \frac{R_n}{F}$
 - (B) $\operatorname{Tan} \phi = R_n \times F$
 - (C) $\operatorname{Tan} \phi = \frac{F}{R_n}$
 - (D) $\operatorname{Tan} \phi = F R_n$
- The frictional force will—
 - (A) Always resist the motion of a body
 - (B) Accelerate the motion of body
 - (C) Neither resist nor accelerate the motion of a body
 - (D) Resist the motion of a body on a rough surface only
- 88. The coefficient of friction is given by the relation —
 - (A) $\mu = R_n \times F$ (B) $\mu = \frac{R_n}{F}$
 - (C) $\mu = R_n F$ (D) $\mu = \frac{F}{R_n}$
- One horse power is equal to—
 - (A) 764 watts
- (B) 746 watts
- (C) 754 watts
- (D) 748 watts
- Potential energy is due to the—
 - (A) Motion of a body
 - (B) Chemical reaction between two metals
 - (C) Fissioning of an atom
 - (D) Position of the body

- 91. The unit of work is—
 - (A) kg/cm²
- (B) kgm
- (C) kg/sec²
- (D) kg/sec
- One horse power is equal to—
 - (A) 75 kgf
- (B) 75 kgm
- (C) 75 kg m/sec
- (D) 75 kg/m/sec
- Work is defined as the product of—
 - (A) Force × acceleration
 - (B) Force x time
 - (C) Force × distance
 - (D) $\frac{\text{Force}}{\text{distance}}$
- Watt is the unit of—
 - (A) Work
 - (B) Power
 - (C) Current
 - (D) Force
- When the spring of a watch is wound, it will possess-
 - (A) Kinetic energy
 - (B) Heat energy
 - (C) Flow energy
 - (D) Potential energy
- The time period of a seconds pendulum is—
 - (A) 1 second
- (B) 2 seconds
- (C) $\frac{1}{2}$ second
- (D) 2π seconds
- The length of seconds pendulum is equal to—
 - (A) 100 cm
- (B) 100 mts
- (C) 99·39 cm
- (D) 99.39 cms
- 98. The number of vibrations per second is known as—
 - (A) Beat
 - (B) Amplitude
 - (C) Frequency
 - (D) Time period
- The kinetic energy due to rotation is equal to—
 - (A) Iω²
- (B) $\frac{I\omega^2}{2}$
- (C) $\frac{\text{I}\omega}{2}$

60. (A)

65.(C)

70.(C)

75.(C)

80. (D)

84. (A) 85. (B)

89. (B) 90. (D)

94. (B) 95. (D)

99.(B) 100.(D)

83.(C)

88. (D)

93.(C)

98.(C)

101. (C) 102. (A) 103. (A) 104. (D) 105. (B)

106. (D) 107. (B) 108. (A) 109. (A) 110. (C)

82. (C)

87.(A)

92. (C)

97.(D)

81. (A)

86. (C)

91. (B)

96. (B)

The lathe bed is made of— (B) Zero shearing stress (B) Alloy steel (A) Mild steel (C) Zero principal stress (D) Chilled cast iron (D) Minimum shearing stress (C) Pig iron 101. Drilling is an example of— 106. In case of pure bending the beam will bend into an arc of a-(A) Simple cutting (B) Orthogonal cutting (A) Parabola (B) Ellipse (C) Oblique cutting (D) None of these (C) Hyperbola (D) Circle In a shaper, the metal is removed during— The point of contrafexure occurs only in— (A) Forward stroke (A) Cantilever (B) Return stroke (B) Overhanging beams (C) Both the forward and return stroke (D) Neither the forward stroke nor the return (C) Simply supported beams stroke (D) Continuous beams D' Alembert's principle is used for — Section modulus 'Z' is expressed as— (A) Reducing the problem of kinetics to (A) $\frac{I}{y}$ equivalent statics problem (B) Determining stresses in the truss (C) M.I. (D) E.I. (C) Produce a moment of couple 109. A framed structure is perfect if it contains (D) Stability of floating bodies members equal to — The centre of precussion of a solid cylinder of (A) 2n-3(B) n − 1 radius 'r' resting on a horizontal plane will (C) 2n-1 (D) 3n-2be— The centre of gravity of a uniform lamina lies (A) $\frac{r}{2}$ (A) The centre of heavy portion (C) $\frac{2r}{3}$ (B) The bottom surface 105. Principal planes are the planes of— (C) The midpoint of its axis (D) All of the above (A) Maximum shearing stress Answers 56. (B) 57. (B) 58. (D) 59. (D) 1.(D) 2.(D) 3. (D) 4. (D) 5. (A) 61. (A) 62. (C) 63.(B) 64.(C) 6. (B) 8.(C) 10. (D) 7. (C) 9. (A) 69.(B) 67. (C) 68. (A) 66. (C) 11.(A) 12. (C) 13.(B) 15. (A) 14. (A) 71. (A) 72. (C) 73. (D) 74.(B) 19. (D) 16. (C) 17.(A) 18.(C) 20.(B) 76. (C) 77. (B) 78.(B) 79.(C) 21. (C) 23.(B) 22.(A) 24. (D) 25.(C)

26. (A)

31. (C)

36. (B)

41. (C)

46. (B)

51.(A)

27. (C)

32. (B)

37. (C)

42. (C)

47. (B)

52. (C)

28.(C)

33. (A)

38.(C)

43.(C)

48.(B)

53.(C)

29. (D)

34.(C)

39.(C)

44.(C)

49. (A)

54.(B)

30.(B)

35.(C)

40.(C)

45.(C)

50.(C)

55. (A)

Model Set - 3

(A) Increase

(B) Decrease

(C) Remain constant

(D) None of the above

1.	The path followed by the projectile is a-	8.	A medium is said to be isotropic when-
	(A) Circle (B) Parabola		(A) ε is a scalar constant
	(C) Hyperbola (D) Ellipse		(B) ε is zero
2	The greatest height attained by the projectile		(C) ε is unity
	is equal to—		(D) ε is infinite
		9.	If a body moves vertically downwards, its-
	$(A) = \frac{2g}{2g}$		(A) Acceleration = $+g$
	(A) $\frac{\mu^2 \sin^2 \alpha}{2g}$ (B) $\frac{\mu^2 \sin \alpha}{2g}$ (C) $\frac{\mu^2 \sin^2 \alpha}{g}$ (D) $\frac{\mu \sin \alpha}{2g}$		(B) Acceleration = $-g$
	g $2g$		(C) Acceleration > g
3.	When two colliding bodies before impact are		(D) Acceleration < g
	moving along the line of compact, it is known as—	10.	The acceleration in a cartesian system is expressed as—
	(A) Oblique impact (B) Direct impact		(A) $\tan^{-1} \frac{a_x}{a_y}$ (B) $\tan^{-1} \frac{a_y}{a_x}$
	(C) Restitution (D) None of the above		(A) tan a _y (B) tan a _x
4.	The coefficient of restitution 'e' is always—		(A) $\tan^{-1} \frac{a_x}{a_y}$ (B) $\tan^{-1} \frac{a_y}{a_x}$ (C) $\cot^{-1} \frac{a_x}{a_y}$ (D) $\sin^{-1} \frac{a_x}{a_y}$
	(A) Equal to one (B) Less than one		$\mathbf{a}_{\mathbf{y}}$ $\mathbf{a}_{\mathbf{y}}$
_	(C) More than one (D) None of the above	11.	The velocity ratio of a differential pulley is-
5.	According to law of conservation of mo- mentum—		(A) $\frac{2D}{D-d}$ (B) $\frac{D}{D-d}$ (C) $\frac{D}{2(D-d)}$ (D) $\frac{2(D-d)}{D}$
	(A) Momentum before impact > momentum		D = a $D = a$
	after impact		(C) $\frac{D}{2(D-d)}$ (D) $\frac{2(D-d)}{D}$
	(B) Momentum before impact < momentum after impact	12.	The value of modulus of elasticity for mild steel is—
	(C) Momentum before impact = momentum		(A) 2×10^6 kgf/cm
	after impact		(B) $1 \times 10^6 \text{kgf/cm}^2$
	(D) None of the above		(C) $0.5 \times 10^6 \text{ kgf/cm}^2$
6.	Force is equal to—		(D) $0.05 \times 10^6 \text{ kgf/cm}^2$
	(A) Mass × density		•
	(B) Mass x acceleration	13.	In an ideal machine—
	(C) Mass × distance		(A) Work done = Velocity ratio
	(D) Mass × velocity		(B) Work done > Velocity ratio
7.	The total momentum of two bodies after		(C) Work done < Velocity ratio
collision will—			(D) None of the above

14. The efficiency of a reversible machine should

(B) 50%

(D) 95%

be more than -

(A) 40%

(C) 80%

- 15. If the efficiency of a machine is less than 50%, it is known as—
 - (A) Reversible machine
 - (B) Self locking machine
 - (C) Ideal machine
 - (D) None of the above
- In first system of pulleys, the velocity ratio is equal to —
 - (A) $2 \times n$
- (B) 2n
- (D) 2 + n
- The acceleration of a body can be expressed
 - (A) $\frac{d\mathbf{V}}{dt}$
- (B) $\frac{d^2s}{dt^2}$
- (C) V/t
- (D) All of the above
- 18. Hooke's Law states that within the elastic limit—
 - (A) Stress + Strain = Constant
 - (B) Stress Strain = Constant
 - (C) Stress × Strain = Constant
 - (D) $\frac{\text{Stress}}{\text{Strain}} = \text{Constant}$
- 19. The value of Poisson's ratio $\left(\frac{1}{m}\right)$ is never greater than—
 - (A) 0.05
- (B) 0.5
- (C) 1·5
- (D) 5·0
- In radar system, the pulses are sent at—
 - (A) A regular time
 - (B) A regular interval
 - (C) Any interval
 - (D) None of these
- The maximum value of tangential stress from Mohr circle diagram, is equal to—
 - (A) Radius of the circle
 - (B) Diameter of the circle
 - (C) Half of the radius
 - (D) None of the above
- Mohr's circle is used as a graphical method for analysis of—
 - (A) Simple stress
 - (B) Two dimensional stress

- (C) Combined bending moment and torsion
- (D) Shear force and bending moment
- The quantity of strain energy stored in a material without any permanent deformation is known as—
 - (A) Resilience
 - (B) Proof resilience
 - (C) Modulus of resilience
 - (D) None of the above
- A beam having more than two supports is called as—
 - (A) Fixed beam
 - (B) An overhanging beam
 - (C) Continuous beam
 - (D) Simply supported beam
- The diaphram of an earphone vibrates due to varying produced by the coil-
 - (A) Electric charge
 - (B) Poles
 - (C) Magnetic flux
 - (D) None of these
- The bending equation is given as—
 - (A) $\frac{M}{I} = \frac{f}{R} = \frac{E}{y}$ (B) $\frac{M}{I} = \frac{f}{v} = \frac{E}{R}$
 - (C) $\frac{M}{v} = \frac{R}{I} = \frac{E}{f}$ (D) $\frac{M}{I} = \frac{y}{E} = \frac{f}{R}$
- The most economical mild steel section is—
 - (A) I. section
 - (B) Circular section
 - (C) Rectangular section
 - (D) Channel section
- A beam will have uniform strength if—
 - (A) Its cross-sectional area is same throughout the beam
 - (B) The shear stress is same at every section of the beam
 - (C) The bending stress is same at every section of the beam
 - (D) None of the above
- The bending stress in a beam is—
 - (A) Equal to bending moment
 - (B) Less than bending moment
 - (C) Directly proportional to the bending moment
 - (D) Inversely proportional to the bending moment

(B) Resistant body

(D) None of the above

(C) Rigid as well as resistant body

30.	The ratio of maximum deflection of a beam to its span is called—	39.	When motion is transmitted by means of a fluid it is known as—		
	(A) Strain (B) Poisson's ratio		(A) Flexible link (B) Rigid link		
	(C) Stiffness (D) Safety factor		(C) Fluid link (D) None of the above		
31.	Characteristic impedance is a fine and useful	40.	Flat belt running over a pulley forms—		
	concept of a— (A) Circuit (B) Transmission		(A) A closed pair (B) An open pair		
	(C) Network (D) None of these		(C) A spherical pair (D) A screw pair		
32.	The anode material is usually made of—	41.	A kinematic chain should have a minimum of—		
	(A) Carbon (B) Nickel		(A) One link (B) Two links		
	(C) Copper (D) None of these		(C) Three links (D) Four links		
33.	The laminated spring is supported at the— (A) Centre	42.	The three types of links are—		
	(B) Both ends		(A) Cross, rigid & fluid		
	(C) One end only		(B) Rigid, elastic & fluid		
	(D) Centre as well as both ends		(C) Rigid, flexible & fluid		
34.	The type of spring used in clutches of	43.	(D) Strength, rigid & flexible		
	automobiles is—		In a compound kinematic chain the number of		
	(A) Laminated spring		pairs are more than—		
	(B) Spiral spring		(A) Two (B) Three		
	(C) Closed coiled helical spring		(C) Four (D) Six		
	(D) Disc spring		In slider crank chain the number of possible		
35.	Hoop or circumferential stress is equal to—		inversions are—		
	(A) Longitudinal stress		(A) Three (B) Four		
	(B) Twice the longitudinal stress		(C) Five (D) Six		
	(C) Half of the longitudinal stress	45.	The double slider crank chain consists of-		
	(D) Four times the longitudinal stress		(A) Two turning and two sliding pairs		
36.	The pitch of riveted joint is generally—		(B) One turning and one sliding pairs		
	(A) $\frac{d}{2}$ (B) $2d$		(C) Two turning and one sliding pairs		
	2		(D) Three turning pairs		
	(C) 3d (D) 1·5d	46.	The angular acceleration is equal to -		
37.	For general stress calculation a cylinder is considered thin, if—		(A) $\frac{d\theta}{dt}$ (B) $\frac{ds}{dt}$		
	(A) $\frac{t}{d} \le 0.05$ (B) $\frac{t}{d} \le 0.5$ (C) $\frac{t}{d} \le 5.0$ (D) $\frac{t}{d} \le 0.025$		(C) $\frac{d\omega}{dt}$ (D) $\frac{d\omega}{d\theta}$		
	t t		dt $d\theta$		
	(C) $\frac{1}{d} \le 5.0$ (D) $\frac{1}{d} \le 0.025$	47.	The unit for angular acceleration is—		
38.	A link must be a—		(A) Metre/sec (B) Metre/sec ²		
	(A) Rigid body		(C) Radians/sec ² (D) Rad/sec		

48. The slope of velocity-time curve represents -

(A) Displacement (B) Acceleration

(D) None of the above

(C) Velocity

- Angular acceleration of a body is—
 - (A) The rate of change of displacement
 - (B) The rate of change of velocity
 - (C) The rate of change of angular velocity
 - (D) The rate of change of momentum
- Inertia force is equal to—
 - (A) mv
- (B) −mv
- (C) −mf
- (D) Wf
- 51. The ratio of tensions in the tight and slack sides of a belt is given by the relation—
 - (A) $\frac{T_1}{T_2} = e^{\mu\theta}$ (B) $\frac{T_1}{T_2} = e^{\mu}$

 - (C) $\frac{T_1}{T_2} = e^{2\mu\theta}$ (D) $\frac{T_1}{T_2} = \mu e^{\theta}$
- The circular pitch is equal to—
 - $(A) \frac{1}{D}$
- (B) T.D
- (C) $\frac{D}{T}$
- (D) $\frac{\pi D}{T}$
- 53. The pressure angle for gear teeth is in the range of—
 - (A) 0°-10° (B) 10°-15°
- - (C) 15°-20°
- (D) $25^{\circ}-40^{\circ}$
- The fractional torque in a flat pivot bearing for a uniformly distributed pressure is-
 - (A) μWr
- (B) $\frac{3}{2} \mu Wr$
 - (C) $\frac{2}{3} \mu Wr$ (D) $\frac{1}{4} \mu Wr$
- 55. The maximum fluctuation of energy of a flywheel is equal to—

 - (A) $Ia(\omega_1 \omega_2)$ (B) $\frac{I\omega(\omega_1 \omega_2)}{\sigma}$

 - (C) $I\omega^2 (\omega_1 \omega_2)$ (D) $\frac{I(\omega_1 \omega_2)}{...}$
- Sensitiveness of a governor is equal to—
 - (A) $\frac{N}{N_1 N_2}$ (B) $\frac{N_1 N_2}{N}$

 - (C) $\frac{N_1 + N_2}{N}$ (D) $\frac{N}{N_1 + N_2}$
- 57. The primary accelerating force acting on a reciprocating piston is equal to -

- (A) $\frac{R}{a}\omega^2r\cos\theta$ (B) $\frac{g}{R}\omega^2r\cos\theta$
- (C) $\frac{R}{g} \omega r \cos\theta$ (D) $\frac{g}{R} \omega r \cos\theta$
- The shearing resistance for a rivet in double shear according to I.B.R. is equal to—

 - (A) $2 \times \frac{\pi d^2}{4} \times f_s$ (B) $2.5 \times \frac{\pi d^2}{4} \times f_s$
 - (C) $1.875 \times \frac{\pi d^2}{4} \times f_s$ (D) $1.5 \times \frac{\pi d^2}{4} \times f_s$
- The included angle for the B.S.W. thread is—
 - (A) 55°
- (B) 45°
- (C) 35°
- (D) 65°
- The efficiency of the square threads is given by the expression—

 - (A) $\eta = \frac{\tan(\phi + \alpha)}{\tan \alpha}$ (B) $\eta = \frac{\tan \alpha}{\tan(\phi + \alpha)}$
 - (C) $\eta = \frac{\tan \alpha}{\tan \phi}$ (D) $\eta = \frac{\tan \phi}{\tan \alpha}$
- When a shaft is subjected to combined bending and torsion, the equivalent bending moment is equal to -
 - (A) $M_e = \frac{1}{2} (M + \sqrt{M + T})$
 - (B) $M_e = \frac{1}{2} \left(M + \sqrt{M^2 + T^2} \right)$
 - (C) $M_e = \frac{1}{2} \left(M^2 + \sqrt{M^2 + T^2} \right)$
 - (D) $M_e = \frac{1}{2} \left(M + \sqrt{M^2 T^2} \right)$
- 62. The thickness of spherical shell is given by the relation —
 - (A) $t = \frac{pD}{4ft\eta}$ (B) $t = \frac{pD}{2ft\eta}$
 - (C) $t = \frac{2pD}{ftn}$
- (D) $t = \frac{4pD}{ftn}$
- 63. The storage capacity of spherical shell is equal to—
 - (A) $\frac{\pi}{4}$ D
- (B) $\frac{\pi}{4}$ D²
- (C) $\frac{\pi}{6}$ D² (D) $\frac{\pi}{6}$ D

- 64. The velocity, at which the maximum horse power is transmitted is given by—
 - (A) $V = \sqrt{\frac{T}{3W}}$ (B) $V = \frac{\sqrt{gT}}{3W}$
 - (C) $V = \sqrt{\frac{2gT}{3W}}$ (D) $V = \sqrt{\frac{gT}{3W}}$
- The minimum face width of a helical gears's tooth is—
 - (A) $\frac{p}{\sin \alpha}$ (B) $\frac{p}{\cos \alpha}$
 - (C) $p \sin \alpha$
- (D) $\frac{p}{\tan \alpha}$
- Thermal power plant works on
 - (A) Rankine cycle
 - (B) Otto cycle
 - (C) Joule cycle
 - (D) Constant pressure cycle
- 67. The number of teeth on the smaller sprocket of silent chain drive should preferably be not less than—
 - (A) 10
- (B) 12
- (C) 15
- (D) 17
- The depth of centre of pressure (h) is given by the relation —

 - (A) $h = I_0 A \overline{X}$ (B) $h = \frac{I_0}{A \overline{X}}$
 - (C) $h = \frac{I_0 \overline{X}}{A}$ (D) $h = \frac{I_0 A}{A}$
- 69. The strain energy stored by the liquid in compression is equal to -
 - (A) $\frac{P^2}{2K} \times \text{volume}$
 - (B) $\frac{P}{2K} \times \text{volume}$
 - (C) $\frac{2P^2}{K} \times \text{volume}$
 - (D) $2P^2 \times K \times volume$
- The relation between coefficient of discharge, coefficient of velocity and coefficient of contraction is given as-
 - (A) $C_d = C_v \times G_c$ (B) $C_d = C_v C_c$
- - (C) $C_d = \frac{C_v}{C_c}$ (D) $C_v = C_d \times C_c$

- 71. The loss of head at entrance in a pipe is equal
 - (A) $\frac{0.5v^2}{2g}$ (B) $\frac{0.5v}{2g}$
 - (C) $\frac{1.5v^2}{2g}$ (D) $0.5v^2$
- Loss of head due to sudden enlargement is equal to—
 - (A) $\frac{(V_1 V_2)^2}{g}$ (B) $\frac{(V_1 V_2)^2}{2g}$ (C) $\frac{V_1 V_2}{2g}$ (D) $\frac{V_1^2 V_2^2}{2g}$
- The dimensions of C in the Chezy's formula are —
 - (A) L^{1/2}T
- (B) L²T
- (C) L^{1/2}T⁻¹
- (D) $L^{-1}T^{1/2}$
- The kinematic viscosity '∈' is given by the relation-
 - $(A) \in = \frac{\eta}{n} \qquad (B) \in = \eta p$
- - (C) $\epsilon = \frac{p}{n}$ (D) $\epsilon = p + \eta$
- 75. The Darcy equation is expressed as—

 - (A) $h_f = \frac{f_1}{d} \cdot \frac{v^2}{2g}$ (B) $h_f = \frac{4f_1}{d} \cdot \frac{v^2}{2g}$
 - (C) $h_f = \frac{4f_1}{d} \times \frac{v^2}{2g}$ (D) $h_f = \frac{4f_1}{d} \times \frac{v}{g}$
- The wetted perimeter for a pipe running full of water is equal to —
 - (A)
- (B) 2πd
- (C) πd
- (D) $\frac{\pi}{4}d^2$
- The hydraulic mean depth for a pipe running fall of water is equal to —
 - (A) $\frac{1}{2}$
- (B)
- (C) 2d
- (D) 2πd
- The critical depth of a channel is expressed

 - (A) $h_{c} = \frac{v}{g}$ (B) $h_{c} = \frac{v^{2}}{g}$
 - (C) $h_c = \frac{v^2}{2g}$ (D) $h_c = \frac{1}{2} \frac{mv}{2g}$

- 79. The relation between kinetic head and the minimum specific energy is—
 - (A) $\frac{vc^2}{2} = \frac{1}{3} E_{min}$
 - (B) $\frac{vc^2}{2g} = \frac{2}{3} E_{\min}$
 - (C) $\frac{vc^2}{2g} = \frac{1}{4} E_{min}$
 - (D) $\frac{w^2}{2g} = \frac{3}{2} E_{\min}$
- 80. The unit power of a turbine is equal to—
 - (A) $\frac{P}{H^{5/2}}$
- (B) $\frac{P}{H^{1/2}}$
- (C) $\frac{P}{H^{3/2}}$

Where, P = Horse power developed

- 81. The specific speed of a centrifugal pump is given as—
 - (A) $\frac{N\sqrt{Q}}{h^{1/2}}$ (B) $\frac{N\sqrt{Q}}{h^{3/4}}$

 - (C) $\frac{N\sqrt{Q}}{h^{5/4}}$ (D) $\frac{N\sqrt{Q}}{h^{3/2}}$
- 82. One constituent of carbide tool is tungsten carbide. The other constituent is—
 - (A) Vanadium
 - (B) Chromium
 - (C) Aluminium oxide
 - (D) Cobalt
- 83. The percentage of carbon of grey cast iron is in the range of —
 - (A) 3·0 to 3·5
- (B) 2.0 to 2.5
- (C) 1·0 to 1·5
- (D) 0.5 to 1.0
- 84. The product obtained from puddling is known as—
 - (A) Cast-Iron
- (B) Pig Iron
- (C) Wrought Iron
- (D) Carbon steel
- The melting point of iron is—
 - (A) 1810°C
- (B) 1620°C
- (C) 1539°C
- (D) 1648°C
- 86. The molten form of iron is known as—
 - (A) Alpha Iron
- (B) Gamma Iron
- (C) Delta Iron
- (D) None of these

- 87. The maximum percentage of carbon in steel
 - (A) 2.5%
- (B) 1.5%
- (C) 0.85%
- (D) 0.5%
- 88. The hypo steel after normalisation consists of—
 - (A) Ferrite and cementite
 - (B) Ferrite and mertensite
 - (C) Ferrite and pearlite
 - (D) Pearlite and cementite
- The depth of hardness obtained by induction hardening varies from—
 - (A) 2.8 to 2.5 mm
 - (B) 0·1 to 0·8 mm
 - (C) 0.01 to 0.02 mm
 - (D) 1.0 to 1.8 mm
- Bronze in an alloy of—
 - (A) Copper and Tin
 - (B) Copper and Aluminium
 - (C) Copper and lead
 - (D) Copper and zinc
- Steam condenser tubes are made of—
 - (A) Alnico
 - (B) Bell metal
 - (C) Duralumin
 - (D) Admirality brass
- Pewter is an alloy of—
 - (A) Tin and Lead
 - (B) Tin and Aluminium
 - (C) Lead and Zinc
 - (D) Lead and Nickel
- 93. Which one is more ductile?
 - (A) Lead
- (B) Copper
- (C) Tin
- (D) Gold
- 94. The specification, Sn 10 Sb 14 Pb indicate antification bearing alloy of grade —
 - (A) 10
- (B) 14
- (C) 90
- (D) 75
- Conel is a—
 - (A) Copper base alloy
 - (B) Tin base alloy
 - (C) Nickel base alloy
 - (D) Aluminium base alloy

- Invar steel contains—
 - (A) 20% Nickel
 - (B) 36% Nickel
 - (C) 48% Nickel
 - (D) 5% Nickel
- property of moulding and resistance to heat are —
 - (A) 1·3 to 1·4
 - (B) 3·1 to 3·5
 - (C) 0.5 to 0.8
 - (D) 0.8 to 1.05
- 98. The Carnot efficiency is given by the relation —
 - (A) $\frac{T_1 + T_2}{T_1 T_2}$
 - (B) $\frac{T_1 T_2}{T_1 + T_2}$
 - (C) $\frac{T_1 T_2}{T_1}$
 - (D) $\frac{T_1}{T_1 T_2}$
- 99. For calculating air standard efficiency the working fluid is—
 - (A) Diesel
- (B) Petrol
- (C) Air
- (D) Steam
- Gas turbine works on—
 - (A) Constant volume cycle
 - (B) Otto cycle
 - (C) Ericsson cycle
 - (D) Joule cycle
- 101. Bending moment at any point is equal to the algebraic sum of -
 - (A) All vertical forces
 - (B) All horizontal forces
 - (C) Forces on either side of the point
 - (D) Moments of forces on either side of the point
- 102. Shear force at any point on the beam is algebraic sum of-
 - (A) All vertical forces
 - (B) All horizontal forces
 - (C) Forces on either side of the point
 - (D) Moments of forces on either side of the point

- The point of contraflexure is a point where—
 - (A) Shear force is zero
 - (B) Shear force changes sign
 - (C) Bending moment changes sign
 - (D) Bending moment is maximum
- 97. The specific gravity of plastic to increase the 104. The maximum shear stress in Mohr's circle will be at following angles to the principle plane —
 - (A) 0°
- (B) 45°
- (C) 60°
- (D) 90°
- Mercury is used in barometers on account of
 - (A) Negligible capillary effect
 - (B) High density
 - (C) Very low vapour pressure
 - (D) Low compressibility
- 106. Standard atmosphere in terms of water column is—
 - (A) 9·81 m
 - (B) 10·33 m
 - (C) 8.9 m
 - (D) 12·75 m
- 107. An ideal fluid is the one which—
 - (A) Is compressible
 - (B) Is incompressible
 - (C) Has low density
 - (D) Is non-viscous and incompressible
- 108. The stagnation pressure is the sum of—
 - (A) Static pressure and vacuum pressure
 - (B) Dynamic pressure and vacuum pressure
 - (C) Static pressure and dynamic pressure
 - (D) Absolute pressure and dynamic pressure
- 109. A substance above critical temperature exists as—
 - (A) Supersaturated fluid
 - (B) Gas
 - (C) Liquid
 - (D) Vapour
- 110. The value of entropy at 0°C is taken as—
 - (A) 1
 - (B) Zero
 - (C) 1
 - (D) Some other value

Answers

1. (B)	2.(A)	3.(B)	4.(B)	5.(C)	56. (A)	57. (B)	58.(C)	59. (A)	60.(B)
6. (B)	7. (C)	8. (A)	9. (A)	10.(B)	61. (B)	62.(A)	63.(C)	64.(B)	65. (D)
11.(A)	12.(A)	13. (A)	14.(B)	15.(B)	66. (A)	67.(D)	68.(B)	69. (A)	70. (A)
16. (B)	17. (D)	18. (D)	19.(B)	20.(B)	71. (A)	72. (B)	73. (A)	74. (A)	75.(B)
21.(A)	22. (B)	23.(B)	24.(C)	25.(C)	76. (C)	77.(A)	78. (A)	79. (A)	80.(C)
26. (B)	27. (A)	28.(C)	29.(C)	30.(C)	81. (B)	82.(D)	83. (A)	84.(C)	85.(C)
31. (B)	32. (B)	33. (A)	34.(C)	35.(B)	86. (D)	87. (B)	88.(C)	89.(B)	90. (A)
36. (B)	37.(A)	38.(B)	39.(C)	40.(B)	91. (D)	92.(A)	93. (D)	94. (A)	95.(C)
41.(D)	42. (C)	43.(C)	44.(B)	45. (A)	96. (B)	97.(A)	98.(C)	99.(C)	100.(C)
46. (C)	47. (B)	48.(B)	49.(C)	50.(C)	101.(D)	102. (C)	103.(C)	104. (D)	105.(C)
51.(D)	52. (C)	53.(C)	54.(C)	55. (A)	106. (B)	107.(D)	108.(C)	109. (A)	110.(B)

Model Set - 4

	formation of chip— (A) Increases (B) Decreases (C) Remains same (D) None of these The type of chip obtained by machining hard and brittle metals is— (A) Continuous chip with built up edge (B) Continuous chip	(C) Cutting speed (D) Nature of coolant 9. The matching time is proportional to— (A) V (B) V ² (C) $\frac{1}{V}$ (D) $\frac{1}{V^2}$
3.	 (B) Continuous chip (C) Discontinuous chip (D) Inhomogeneous chip In oblique cutting, the angle at which the cutting face is inclined to the direction of the cut is— 	 10. In case of high speed steel tool, the increase in tool life with the use of cutting fluid is— (A) 60% (B) 50% (C) 25% (D) 10% 11. In matching the thickness of the chi
4.	(A) 45° (B) 90° (C) 30° (D) 60° In broaching steel parts in the from of chips obtained are— (A) Short helices (B) Long helices (C) Closed spirals (D) Fragments	produced as compare to the depth of cut is— (A) Less (B) More (C) Same (D) May be less or more depending upon the material of the tool
5.	With the increase in cutting speed— (A) The tool cutting force increases (B) The tool cutting force decreases (C) The tool cutting force remains more or less constant	With the increase in depth of cut the too cutting force— (A) Increases (B) Decreases (C) Remains same (D) Unpredictable
6.	(D) None of the above A tool may fail due to— (A) Plastic deformation of cutting edge (B) Cracking of cutting edge (C) Flank wear	 13. The side rake angle of high speed steel too for machining brass is— (A) 15° (B) 12° (C) 8° (D) 0° 14. Cutting forces at the cutting tool can be considered as a second considered considered as a second considered as a second considered consi
7.	(D) None of the above The tool life is expressed by the relation— (A) $VT^b = C$ (B) $\frac{V}{T} = C$ (C) $\frac{V}{T^b} = C$ (D) $Vb T = C$	measured by— (A) A dynamometer (B) A viscometer (C) A sine bar (D) A combination set
8.	Which of the following factors has maximum influence on tool life? (A) Shape and angle of tool (B) Tool material	15. The cutting angle of tool for machining bras is— (A) 50° (B) 60° (C) 84° (D) 95°

- 16. The crater wear of tool is due to -
 - (A) The abrading action of the chip
 - (B) The rubbing of tool against the work piece
 - (C) The chemical action of the coolant
 - (D) The excessive heat produced during cutting
- 17. Which of the following is a single point cutting tool?
 - (A) Haxksaw blade(B) Milling cutter
 - (C) Grinding wheel (D) None of the above
- 18. Cold working of metals is carried out-
 - (A) Above the lower critical temperature
 - (B) Above the higher critical temperature
 - (C) Below the lower critical temperature
 - (D) Between the higher and lower critical temperature
- Extrusion is the process of—
 - (A) Pushing the heated billet of metal through an office
 - (B) Producing a hole by using a punch
 - (C) Making cup shaped parts from the sheet metal
 - (D) None of the above
- The operation of cutting holes in sheet by a press is known as—
 - (A) Triming
- (B) Slitting
- (C) Perforating
- (D) Punching
- The cold working of metals results in—
 - (A) Decrease of strength
 - (B) Refined grain structure
 - (C) Increase of strength and hardness of metal
 - (D) Increase in ductility
- Cold working results in—
 - (A) Increase of ductility of metal
 - (B) Increase of strength and hardness of metal
 - (C) Decrease of strength and hardness of metal
 - (D) Refine of grain structure
- The process used for producing flutes or corrugation is known as—
 - (A) Crimping
- (B) Coining
- (C) Hobbing
- (D) Stamping

- The process of producing seamless tubes is known as—
 - (A) Piercing
- (B) Cupping
- (C) Bending
- (D) Drawing
- 25. A press of 50 tonnes capacity means that -
 - (A) Its weight is 50 tonnes
 - (B) Its total output per hour is 50 tonnes
 - (C) Its maximum load applying capacity is 50 tonnes
 - (D) None of the above
- 26. Blanking is the operation of-
 - (A) Cutting of flat sheet to the desired shape
 - (B) Production of number of holes evenly spaced in a regular pattern on a sheet metal
 - (C) Formation of hole
 - (D) Cutting a sheet metal in two parts
- The process of printing letters and numbers on metal sheet is known as—
 - (A) Hobbing
- (B) Coining
- (C) Stamping
- (D) Crimping
- The operation of shaping thin sheets by pressing them against a form is known as—
 - (A) Crimping
- (B) Spinning
- (C) Stamping
- (D) Lamening
- Thick walled tubes or cylinder are produced by—
 - (A) Drawing heated plates
 - (B) Hot spinning of metal
 - (C) Stamping sheet metal
 - (D) Press forming
- The surface finish of parts produced by hot working process as compared to cold working process is—
 - (A) Poor
- (B) Better
- (C) Same
- (D) None of these
- A progressive dieper forms—
 - (A) Only one operation at each stroke of the ram
 - (B) Two or more operations at different stations of the press
 - (C) Two or more operations at one station of the press
 - (D) All of the above

- 32. In thermit welding the high temperature is produced by —
 - (A) An electric arc
 - (B) An exothermal chemical reaction
 - (C) The combustion of oxygen and acety-
 - (D) None of the above
- 33. The type of flame used for welding and cutting operation is—
 - (A) Reducing flame
 - (B) Neutral flame
 - (C) Oxidizing flame
 - (D) None of the above
- 34. The flame produced with excess of oxygen in gas welding is known as—
 - (A) Carbonizing flame
 - (B) Neutral flame
 - (C) Reducing flame
 - (D) Oxidizing flame
- The type of flame used for welding nickel metal is—
 - (A) Neutral
- (B) Reducing
- (C) Oxidizing
- (D) None of the above
- The strength of the joint is more in case of—
 - (A) Welding
- (B) Soldering
- (C) Brazing
- (D) None of these
- 37. The method of joining metal surfaces by introducing a non ferrous alloy with melting point 400°C is known as—
 - (A) Soldering
- (B) Brazing
- (C) Welding
- (D) None of the above
- 38. The angle of torch in case of backhand type gas welding is—
 - (A) 10 degree to 15 degree
 - (B) 15 degree to 25 degree
 - (C) 40 degree to 50 degree
 - (D) 60 degree to 70 degree
- 39. Which of the following gas for heating is prepared for soldering and brazing?
 - (A) Oxy acetylene(B) Oxy hydrogen
 - (C) Air acetylene
- (D) None of the above
- The ultrasonic welding is suitable for metal up to—
 - (A) 3 mm thick
- (B) 5 mm thick
- (C) 8 mm thick
- (D) 10 mm thick

- 41. In laser welding the heat is supplied by—
 - (A) The oxy-acetylene gas
 - (B) The electric arc
 - (C) The collimated light beam
 - (D) Inducing the current
- 42. Which of the following process is used for cutting and welding of non-ferrous metals?
 - (A) Carbon arc welding
 - (B) Inert gas arc welding
 - (C) Submerged arc welding
 - (D) Metal arc welding
- 43. Which of the alloy is used for brazing?
 - (A) Copper alloy
 - (B) Silver alloy
 - (C) Aluminium alloy
 - (D) Any of the above
- 44. Wipping is the process of making connection of lead pipes with the help of a—
 - (A) Soldering alloy
 - (B) Brazing alloy
 - (C) Tungston electrode
 - (D) Carbon electrode
- Blow holes in a casting are caused by—
 - (A) Excessive ramming and improper venting of mould sand
 - (B) Insufficient ramming of mould sand
 - (C) Incomplete filling of mould
 - (D) Contraction of the metal during solidification
- 46. The defect in a casting due to insufficient ramming of mould sand is known as-
 - (A) Shrinkage
- (B) Blow holes
- (C) Swell
- (D) Scab
- 47. The tool used or lifting the pattern from the mould is called—
 - (A) Trowel
- (B) Slick
- (C) Lifter
- (D) Draw spikes
- 48. The defect in casting due to incomplete filling of mould is known as—
 - (A) Shrinkage
- (B) Swell
- (C) Pour short
- (D) Honey-combing
- Casting is the process used primarily—
 - (A) To change the shape of metals
 - (B) For machining parts to planned dimensions

- (C) To obtain a surface finish
- (D) In joining parts or materials
- 50. The vertical passage for bringing the molten metal to moild cavity is known as a—
 - (A) Gate
- (B) Sprue
- (C) Riser
- (D) Runner
- The amount of draft allowance provided on the exterior surface of pattern is up to —
 - (A) 2 mm for 100 mm
 - (B) 5 mm for 100 mm
 - (C) 10 mm for 100 mm
 - (D) 0.5 mm for 100 mm
- Which of the following material is used for making of pattern?
 - (A) Aluminium
- (B) Plastics
- (C) Mercury
- (D) All of the above
- The taper provided an all vertical surfaces of a pattern is known as—
 - (A) Shrinkage allowance
 - (B) Draft allowance
 - (C) Machining allowance
 - (D) Distortion allowance
- 54. The amount by which a pattern is made oversize to compensate for the contraction of casting is called as—
 - (A) Shrinkage allowance
 - (B) Draft allowance
 - (C) Rapping allowance
 - (D) Machining allowance
- The single-point cutting tool is used in
 - (A) Milling work
- (B) Broaching work
- (C) Reaming work (D) Lathe work
- 56. The most important factor for specifying the lathe machine is—
 - (A) The maximum diameter of the work it will swing
 - (B) The length of bed
 - (C) The maximum speed of the spindle
 - (D) Height of the bed
- 57. The operation of bevelling the extreme end of a work piece is known as—
 - (A) Chamfering
- (B) Knurling
- (C) Spinning
- (D) Facing

- Knurling is the process of—
 - (A) Bevelling the extreme end of a workpiece
 - (B) Embossing a diamond shaped pattern on the surface of a workpiece
 - (C) Machining the ends of a work piece
 - (D) Finishing a hole which has been previously drilled
- The mandrel is used—
 - (A) For holding and rotating a hollow piece of work on the lathe
 - (B) For drilling hole in a workpiece
 - (C) As a taper turning attachment on the lathe machine
 - (D) For checking the furnished
- In a shaper tool the side clearance angle is—
 - (A) 10 degree to 15 degree
 - (B) 15 degree to 18 degree
 - (C) 5 degree to 10 degree
 - (D) 2 degree to 3 degree
- 61. In a planer, the ratio of cutting time to return time is—
 - (A) 5:1 to 7:1
- (B) 2:1 to 4:1
- (C) 6:1 to 8:1
- (D) 1:1 to 1.5:1
- A 3000 mm planner indicates that
 - (A) The length of the table is 3000 mm
 - (B) The maximum length of table travel is 3000 mm
 - (C) The distance between the two housing is 3000 mm
 - (D) None of the above
- 63. In a nailing operation—
 - (A) The work is fed against a reciprocating
 - (B) The work is fed against a rotating multipoint cutter
 - (C) The tool is fed against a rotating work
 - (D) The tool is fed against reciprocating
- 64. The helix angle for a milling cutter is in the range of—
 - (A) 25 degree to 45 degree
 - (B) 35 degree to 60 degree
 - (C) 10 degree to 15 degree
 - (D) 5 degree to 10 degree

- In upmilling the cutter rotates—
 - (A) Against the same direction of travel of the workpiece
 - (B) In the same direction of travel of the workpiece
 - (C) Against the stationary workpiece
 - (D) None of the above
- The shaper is used for machining of—
 - (A) Flat surfaces
 - (B) Cylindrical surface
 - (C) Spherical surfaces
 - (D) All of the above
- 67. The machine used for machining flat surfaces of large size is—
 - (A) Lathe
- (B) Milling
- (C) Planer
- (D) Shaper
- Tapping is the operation of—
 - (A) Cutting external threads
 - (B) Cutting internal threads
 - (C) Finishing the flat surfaces
 - (D) Enlarging the end of hole
- The process of enlarging a hole is known as—
 - (A) Counter boarding
 - (B) Countersinking
 - (C) Boring
 - (D) Drilling
- 70. The usual value of lip clearance angle of a drill is—
 - (A) 25°
- (B) 30°
- (C) 12°
- (D) 5°
- The velocity of jet of water from orifice is given by —
 - (A) V = 2gH
- (B) $V = \sqrt{2gH}$
- (C) $V = \frac{1}{2\sqrt{gH}}$ (D) $V = \frac{\sqrt{2}}{gH}$
- 72. In radial drilling machine—
 - (A) It is not possible to raise the radial arm
 - (B) It is not possible to lower the radial arm
 - (C) It is possible to tilt the radial arm
 - (D) The radial arm can be swung around the vertical
- The usual point angle for twist drill is—
 - (A) 45°
- (B) 60°
- (C) 118°
- (D) 160°

- Twist drills are generally made of—
 - (A) High speed steel
 - (B) Mild steel
 - (C) Aluminium alloy
 - (D) Bronze
- 75. Which is manufactured by abrasive material?
 - (A) Sand stone
- (B) Diamond
- (C) Silicon carbide (D) Garnet
- 76. The raw material used for manufacturing aluminium oxide as abrasive material is—
 - (A) Silica sand
- (B) Bauxite
- (C) Quartz
- (D) Silicon carbide
- A grinding wheel is specified as WA 46 WS. VBE. The number 46 denotes.
 - (A) Grain size
 - (B) Structure of wheel
 - (C) Diameter of wheel in centimetres
 - (D) Surface speed
- 78. The grinding ratio normally varies from—
 - (A) 10 to 25
- (B) 25 to 50
- (C) 75 to 125
- (D) 150 to 300
- The grinding wheel is considered better if the grinding ratio is—
 - (A) Maximum
- (B) Very low
- (C) Average
- (D) Minimum
- 80. The speed used for super finishing varies from—
 - (A) 1800 to 3000 S. m.p.m.
 - (B) 1000 to 2000 S. m.p.m.
 - (C) 1 to 15 S. m.p.m.
 - (D) 500 to 1000 S. m.p.m.
- 81. The amount of material removed by the process of super finishing is about—
 - (A) 0·2 mm
- (B) 0.02 mm
- (C) 0.002 mm
- (D) 0.5 mm
- The surface speed for tool and cutter grinding is in the range of -
 - (A) 600 to 800 m/min
 - (B) 800 to 1000 m/min
 - (C) 1500 to 2000 m/min
 - (D) 2500 to 3000 m/min

83.		ch selection of grinding	91.	The appearance of I	aser beam is—
	wheel depends upor	ı—		(A) Greenish	(B) Reddish
	(A) Material to be	ground		(C) Yellowish	(D) Whitish
	(B) Amount of stoo	ck to be removed	92.	The numerical contr	ol machine, servomotor is
	(C) Area of contac	t			ting information recorded
	(D) All of the abov	e		on punched tape into	0—
01	The term grade as	applied to grinding wheal		(A) Bound signals	
04.	refers to—	applied to grinding wheel		(B) Light signals	
	(A) The size of the	grains		(C) Electrical signa	als
		r hardness with which the		(D) Mechanical sig	mals
	· ·	e cutting points or abras-	93.	the profile made b	is equal to critical depth y a free water surface is
	(C) The size of the	grinding wheel		called—	(D) 0 (0)
	(D) None of the ab	ove		(A) H profile	(B) S profile
25	The grit size for sur	face grinding is		(C) C profile	(D) A profile
65.	(A) 10-12	(B) 12-15	94.		conomical section of tri
	(C) 15-25	(D) 40-60		the equal sloping sid	ne included angle between
				(A) 45°	(B) 90°
86.	-	ency of sparks in electro-		(C) 30°	(D) 60°
	discharge machining		05		` '
	•	(B) 1000 sparks/sec	95.		harge in case of adhering d to free nappe over the
	(C) 5000 sparks/se	c (D) 10000 sparks/sec		weir as —	a to free happe over the
87.		e machining (EDM), the		(A) More	(B) Less
	material of tool is-			(C) Same	(D) Unpredictable
	(A) High speed ste	el (B) Brass or copper	96.	The Bernoulli's the	orem for liquid is applica-
	(C) Carbide	(D) Diamond	,	ble for—	orom for inquite to approve
88.	In electron beam i	machining the erosion of		(A) Turbulent flow	,
	metal is achieved by	/ —		(B) Viscous fluids	
		city focussed stream of		(C) Compressible f	luids
	electrons			(D) None of the ab	ove
	workpiece and		97.		wo parallel flat plates, one ther at rest, is known as—
		ency of abrasive particles		(A) Laminar flow	(B) Turbulent flow
	(D) None of the ab	ove		(C) Couette flow	(D) None of the above
89.	The gap between the an electro chemical	e anode and the cathode of milling is about—	98.	The sudden rise in line is known as—	pressure of fluid in a pipe
	(A) 0.025 cm	(B) 0.25 cm		(A) Nammer blow	(B) Separation
	(C) 2.5 cm	(D) 1.5 cm		(C) Surge	(D) Hydraulic jump
90.		g rate of electro-chemical pared to electro discharge	99.		lip in reciprocating pumps condition is in the order
	(A) More	(B) Less		(A) 2	(B) 10
	(C) Same	(D) None of these		(C) 5	(D) 7

(C) 5

(D) 7

(A) Reduction in set up time (B) Reduction in machining time (C) Reduction in number of jigs and fixtures (D) All of the above 101. The cutting edge of a cold chisel is about— (A) 30° (B) 45° (C) 60° (D) 75° 102. The cutting edge of hot chisel is about— (A) 30° (B) 45° (C) 60° (D) 75° 103. Cast iron and steel pipes are produced by— (A) Slush casting (C) True centrifugal casting (C) True centrifugal casting (D) Die casting (D) Die casting (C) True centrifugal casting (C) True centrifugal casting (C) True centrifugal casting (C) True centrifugal casting (D) Centrifugal casting (E) Slush casting (C) Die casting (C) Die casting (C) Die casting (C) Die casting (D) Centrifugal casting (E) Slush casting (D) Centrifugal casting (E) Slush casting (D) Centrifugal casting (E) Die casting (D) Centrifugal casting (E) Slush casting (E) Slu
(B) Reduction in machining time (C) Reduction in number of jigs and fixtures (D) All of the above 101. The cutting edge of a cold chisel is about— (A) 30° (B) 45° (C) 60° (D) 75° 102. The cutting edge of hot chisel is about— (A) 30° (B) 45° (C) 60° (D) 75° 103. Cast iron and steel pipes are produced by— (A) Slush casting (C) True centrifugal casting (C) True centrifugal casting (D) Die casting (D) Die casting (C) The casting method adopted for ornaments and toys of non-ferrous alloys, is— (A) Permanent mould casting (B) Slush casting (C) Die casting (D) Centrifugal casting (C) Swell (D) Blow whole (C) Column (B) Yellow colour (C) Black colour (D) Blue colour
(C) Reduction in number of jigs and fixtures (D) All of the above 101. The cutting edge of a cold chisel is about— (A) 30° (B) 45° (C) 60° (D) 75° 102. The cutting edge of hot chisel is about— (A) 30° (B) 45° (C) 60° (D) 75° 103. Cast iron and steel pipes are produced by— (A) Slush casting (C) True centrifugal casting (C) True centrifugal casting (D) Die casting (D) Die casting (D) Die casting (D) Die casting (E) The casting method adopted for ornaments and toys of non-ferrous alloys, is— (A) Permanent mould casting (B) Slush casting (C) Die casting (C) True centrifugal casting (E) The casting method adopted for ornaments and toys of non-ferrous alloys, is— (A) Permanent mould casting (B) Slush casting (C) Die casting (D)
(D) All of the above
101. The cutting edge of a cold chisel is about— (A) 30° (B) 45° (C) 60° (D) 75° 102. The cutting edge of hot chisel is about— (A) 30° (B) 45° (C) 60° (D) 75° 103. Cast iron and steel pipes are produced by— (A) Slush casting (C) True centrifugal casting (D) Die casting (D) Centrifugal castin
(A) 30° (B) 45° (C) 60° (D) 75° 102. The cutting edge of hot chisel is about— (A) 30° (B) 45° (C) 60° (D) 75° 103. Cast iron and steel pipes are produced by— (A) Slush casting (C) True centrifugal casting (D) Die casting (D) Die casting (D) Die casting (E) True casting method adopted for ornaments and toys of non-ferrous alloys, is— (A) Permanent mould casting (B) Slush casting (C) Die casting (C) Die casting (C) Die casting (B) Slush casting (C) Die casting (D) Centrifugal casting (D) Centrifug
102. The cutting edge of hot chisel is about—
102. The cutting edge of hot chisel is about— (A) 30° (B) 45° (C) 60° (D) 75° 103. Cast iron and steel pipes are produced by— (A) Slush casting (C) True centrifugal casting (D) Die casting (D) Die casting (D) The casting method adopted for ornaments and toys of non-ferrous alloys, is— (A) Permanent mould casting (B) Slush casting (C) Time centrifugal casting (D) Centrifugal casting (E) Sush casting (D) Die casting (D) Die casting (E) Haswers (D) Die casting (D) Die casting (D) Die casting (D) Die casting (D) Centrifugal casting (E) Black colour (C) Black colour (D) Blue colour
(A) 30° (B) 45° (C) 60° (D) 75° 103. Cast iron and steel pipes are produced by— (A) Slush casting (B) Investement casting (C) True centrifugal casting (D) Die casting (D) Die casting (D) Die casting (D) Permanent mould casting (E) The casting method adopted for ornaments and toys of non-ferrous alloys, is— (B) Slush casting (C) True centrifugal casting (D) Die casting (D) Captrifugal casting (D) Captrifugal casting (D) Centrifugal casting (C) Swell (D) Blow whole (D) Blow whole (D) Centrifugal casting (E) Black colour (D) Blue colour (C) Black colour (D) Blue colour
(C) 60° (D) 75° 103. Cast iron and steel pipes are produced by— (A) Slush casting (C) True centrifugal casting (D) Die casting (D) Die casting (E) The casting method adopted for ornaments and toys of non-ferrous alloys, is— (B) Slush casting (C) True centrifugal casting (D) Die casting (D) Captrifugal casting (D) Captrifugal casting (D) Captrifugal casting (D) Centrifugal casting (D) Centrifugal casting (C) Die casting (D) Centrifugal casting (C) Swell (D) Blow whole (D) Blow whole (D) Blow whole (E) Wellow colour (C) Black colour (D) Blue colour (D) Blue colour (C) Black colour (D) Blue colour (C) Black colour (D) Blue colour (D) Blue colour (E) Black colour (D) Blue colour (D) Blue colour
on the pattern by— (A) Slush casting (B) Investement casting (C) True centrifugal casting (D) Die casting (D) Centrifugal cast
(A) Slush casting (B) Investement casting (C) True centrifugal casting (D) Die casting (D) Die casting (E) True centrifugal casting (D) Die casting (E) True centrifugal casting (E) Black colour (D) Blue colour (E) Tellow Colour (D) Blue colour (E) Colour (D) Blue colour (E) Colour (D) Colour (D) Sulva (C) Sul
(C) True centrifugal casting (D) Die casting (D) Die casting (D) Die casting (E) Black Colour (D) Die casting (D) Die casting (D) Die casting (E) Black Colour (D) Black Colour (E) Black Colour (D) Sluck Colour (E) Black Colour (D) Sluck Colour (C) Die casting (D) Centrifugal casting (E) Black Colour (D) C. (A) Answers (E) Black Colour (D) S. (C) 5. (C) (C) 5. (C) (C) Die casting (D) Centrifugal
(C) True centrifugal casting (D) Die casting (D) Die casting (D) Die casting (E) Die casting method adopted for ornaments and toys of non-ferrous alloys, is— (E) Comparison of non-ferrous alloys is comparison of
(D) Die casting 1. (B) 2. (A) 3. (B) 4. (C) 5. (C) 104. The casting method adopted for ornaments and toys of non-ferrous alloys, is— (A) Permanent mould casting (B) Slush casting (C) Die casting (D) Centrifugal casting 1. (B) 2. (A) 3. (B) 4. (C) 5. (C) 6. (D) 7. (A) 8. (C) 9. (C) 10. (C) 11. (B) 12. (A) 13. (D) 14. (A) 15. (C) 16. (A) 17. (D) 18. (C) 19. (A) 20. (D) 21. (C) 22. (B) 23. (A) 24. (A) 25. (C) 26. (A) 27. (C) 28. (B) 29. (A) 30. (A) 105. A casting defect which results in general enlargement of a casting is known as— (A) Shift (B) Sand wash (C) Swell (D) Blow whole 106. Green sand is a mixture of— (A) 30% sand and 70% clay 11. (B) 2. (A) 3. (B) 4. (C) 9. (C) 10. (C) 10. (C) 9. (C) 10. (C) 11. (B) 12. (A) 13. (D) 14. (A) 15. (C) 12. (C) 22. (B) 23. (A) 24. (A) 25. (C) 26. (A) 27. (C) 28. (B) 29. (A) 30. (A) 30. (A) 30. (A) 31. (B) 32. (B) 33. (B) 34. (D) 35. (B) 31. (B) 32. (B) 33. (B) 34. (D) 35. (B) 35. (A) 37. (B) 38. (A) 39. (C) 40. (A) 41. (C) 42. (B) 43. (D) 44. (A) 45. (A) 45. (A) 50. (B) (C) Swell (D) Blow whole 51. (A) 52. (D) 53. (B) 54. (A) 55. (D) 106. Green sand is a mixture of— (A) 30% sand and 70% clay 56. (A) 57. (A) 58. (B) 59. (A) 60. (D) 66. (A) 67. (C) 68. (D) 64. (A) 65. (A)
1. (B) 2. (A) 3. (B) 4. (C) 5. (C) 104. The casting method adopted for ornaments and toys of non-ferrous alloys, is— (A) Permanent mould casting (B) Slush casting (C) Die casting (D) Centrifugal casting (D) Centrifugal casting (E) Shift (E) Sand wash (C) Swell (D) Blow whole (E) Swell (E) Sand wash (E) Sand
and toys of non-ferrous alloys, is— (A) Permanent mould casting (B) Slush casting (C) Die casting (D) Centrifugal casting (E) Shift (E) Sand wash (C) Swell (C) Swell (D) Blow whole (D) Blow whole (E) Sand and 70% clay (E) Swell (E) Sand and 70% clay (E) Swell (E) Sand wash (E) Sand wa
(A) Permanent mould casting (B) Slush casting (C) Die casting (D) Centrifugal casting (A) Permanent mould casting (C) Die casting (D) Centrifugal casting (D) Centrifugal casting (E) Slush casting (D) Centrifugal casting (E) Centrifugal casting (E
(B) Slush casting (C) Die casting (D) Centrifugal casting (D) Centrifugal casting (E) Slush casting (E) Centrifugal casting (E
(C) Die casting (D) Centrifugal casting (E) Die casting (D) Centrifugal casting (E) Centrifugal casting (D) Centrifugal casting (E) Centrifugal castin
(D) Centrifugal casting 31. (B) 32. (B) 33. (B) 34. (D) 35. (B) 31. (B) 32. (B) 33. (B) 34. (D) 35. (B) 35. (B) 35. (B) 36. (A) 37. (B) 38. (A) 39. (C) 40. (A) 41. (C) 42. (B) 43. (D) 44. (A) 45. (A) 45. (A) 46. (C) 47. (D) 48. (C) 49. (A) 50. (B) 46. (C) 47. (D) 53. (B) 54. (A) 55. (D) 47. (C) 68. (B) 59. (A) 60. (D) 48. (C) 49. (A) 55. (D) 48. (C) 49. (A) 55. (D) 49. (A) 55. (D) 40. (A) 55. (D) 40. (A) 65. (A) 65. (A)
105. A casting defect which results in general enlargement of a casting is known as— (A) Shift (B) Sand wash (C) Swell (D) Blow whole (C) Swell (D) Blow whole (A) 30% sand and 70% clay (B) Sand wash (C) 42. (B) 43. (D) 44. (A) 45. (A) 46. (C) 47. (D) 48. (C) 49. (A) 50. (B) 51. (A) 52. (D) 53. (B) 54. (A) 55. (D) 56. (A) 57. (A) 58. (B) 59. (A) 60. (D) 61. (A) 62. (C) 63. (D) 64. (A) 65. (A) 66. (C) 70. (C) 70. (C)
enlargement of a casting is known as— (A) Shift (B) Sand wash (C) Swell (D) Blow whole 106. Green sand is a mixture of— (A) 30% sand and 70% clay 41. (C) 42. (B) 43. (D) 44. (A) 45. (A) 46. (C) 47. (D) 48. (C) 49. (A) 50. (B) 51. (A) 52. (D) 53. (B) 54. (A) 55. (D) 56. (A) 57. (A) 58. (B) 59. (A) 60. (D) 61. (A) 62. (C) 63. (D) 64. (A) 65. (A)
(A) Shift (B) Sand wash (C) Swell (D) Blow whole (C) Swell (D) Blow whole (A) 30% sand and 70% clay (B) Sand wash (C) 47. (D) 48. (C) 49. (A) 50. (B) 46. (C) 53. (B) 54. (A) 55. (D) 53. (B) 54. (A) 55. (D) 56. (A) 57. (A) 58. (B) 59. (A) 60. (D) 61. (A) 62. (C) 63. (D) 64. (A) 65. (A) 66. (A) 67. (C) 68. (B) 60. (C) 70. (C)
(C) Swell (D) Blow whole 51. (A) 52. (D) 53. (B) 54. (A) 55. (D) 106. Green sand is a mixture of— 56. (A) 57. (A) 58. (B) 59. (A) 60. (D) (A) 30% sand and 70% clay 61. (A) 62. (C) 63. (D) 64. (A) 65. (A) 66. (C) 70. (C)
106. Green sand is a mixture of— (A) 30% sand and 70% clay 56. (A) 57. (A) 58. (B) 59. (A) 60. (D) 61. (A) 62. (C) 63. (D) 64. (A) 65. (A)
(A) 30% sand and 70% clay 61. (A) 62. (C) 63. (D) 64. (A) 65. (A)
66 (A) 67 (C) 68 (B) 60 (C) 70 (C)
66 (A) 67 (C) 69 (D) 60 (C) 70 (C)
(B) 50% sand and 50% clay 60. (A) 67. (C) 68. (B) 69. (C) 70. (C)
(C) 70% sand and 30% clay 71. (B) 72. (D) 73. (C) 74. (A) 75. (C)
(D) 90% sand and 10% clay 76. (B) 77. (A) 78. (C) 79. (A) 80. (C)
81. (C) 82. (C) 83. (D) 84. (B) 85. (D)
107. Cores are used to— 86. (D) 87. (B) 88. (A) 89. (A) 90. (A)
(A) Form internal cavities in the casting 91. (B) 92. (C) 93. (C) 94. (B) 95. (C)
(B) Improve mould surface 96. (D) 97. (C) 98. (B) 99. (A) 100. (D)
(C) Form a part of green sand mould 101. (C) 102. (A) 103. (C) 104. (B) 105. (C)
(D) All of the above 106. (C) 107. (D) 108. (C) 109. (A) 110. (C)

Model Set - 5

- The selection of site for thermal power plant depends upon the—
 - (A) Availability of large quantity of water
 - (B) Climatic and atmospheric conditions of the area
 - (C) Availability of social and recreational facilities
 - (D) None of the above
- 2. The size of site should be at least-
 - (A) Twice the actual size of plant
 - (B) Four times the actual size of plant
 - (C) Five times the actual size of plant
 - (D) Eight times the actual size of plant
- The main object of plant layout is—
 - (A) To make economical use of floor area
 - (B) To maintain flexibility of arrangement of operations
 - (C) To minimise the material bending
 - (D) To produce better quality of product
 - (E) All of the above
- Product layout is used—
 - (A) Where expensive machinery is involved
 - (B) Where operations require hand tools
 - (C) Where product is manufactured in large quantity
 - (D) None of the above
- Process layout is used—
 - (A) Where expensive machinery is involved and variety of products are made
 - (B) Where operations require hand tools
 - (C) Where products are manufactured in large quantity
 - (D) All of the above
- Margin of safety is found by deducing from sales—
 - (A) Fixed cost
 - (B) Variable cost

- (C) Total cost
- (D) Sales at break even point
- The factor on which the selection of plant location depends upon—
 - (A) Future expansion of plant
 - (B) Decentralization of industry
 - (C) The cost at which the goods is delivered to the customer
 - (D) All of the above
- The iron and steel industries should be located close to—
 - (A) Availability of raw material
 - (B) Market
 - (C) Availability of large quantity of water
 - (D) The big city
- 9. Which of the layout is used for ship building industry?
 - (A) Fixed position layout
 - (B) Process layout
 - (C) Product layout
 - (D) Combination of process and product layout
- Economic ordering quantity is the quantity—
 - (A) Most uneconomical to order
 - (B) Most economical to stock
 - (C) Most economical to order
 - (D) That enable availing maximum discount
- Lead times is the average time elapsed between—
 - (A) Initiation of the order and receipt of material
 - (B) Preparation of purchase order and acceptance or order by supplier
 - (C) Placing of order and consumption of present stock
 - (D) Consumption of material from minimum level to safety level

- 178 | Mech. Engg.
- Fixed position layout is also called as—
 - (A) Static product layout
 - (B) Process layout
 - (C) Analytical layout
 - (D) Scientific layout
- The location of textile industries in and around Mumbai in influenced by the—
 - (A) Atmospheric conditions prevailing there and the proximity to market
 - (B) Availability of raw material
 - (C) Availability of power and fuel
 - (D) Availability of skilled workers
- 14. Good material handling involves-
 - (A) Avoiding re-loading
 - (B) Eliminating materials handling by hard labour or machine operator
 - (C) Using equipment to match the pace of machine operator
 - (D) All of the above
- 15. Which of the following is overhead conveyor?
 - (A) Chain conveyor (B) Power roller
 - (C) Belt conveyor (D) Mouorail
- The type of material handling equipment used for moving high volume of material from one fixed point to another is—
 - (A) Cranes
- (B) Trucks
- (C) Conveyors
- (D) Hoists
- Powders, liquids and gases should be transported by—
 - (A) Trucks
- (B) Pipes
- (C) Conveyors
- (D) None of the above
- Break-even point is that volume of sales where there is—
 - (A) Maximum profit
 - (B) Minimum loss
 - (C) No profit no loss
 - (D) Maximum contribution
- In product layout
 - (A) A single machine break down may shut down the whole production line
 - (B) Machine break down do not help up the production
 - (C) More floor space is required
 - (D) It is difficult to train workers

- The chart which indicates the flow of material between various work stations is known as—
 - (A) Operational process chart
 - (B) Flow process chart
 - (C) Travel chart
 - (D) All of the above
- Higher production—
 - (A) Means higher productivity
 - (B) Means proportional higher productivity
 - (C) Always involves higher productivity
 - (D) Does not necessarily mean higher productivity
- 22. Improving the production means-
 - (A) Increased production with same input
 - (B) Increased production with lesser input
 - (C) Lower wastages per unit of output
 - (D) All of the above
- 23. Which one of the follwing methods of increasing production is not through as improvement in productivity?
 - (A) Increasing plant and equipment capacity
 - (B) Better utilisation of plant and equipment
 - (C) Simplification of basic design
 - (D) Increasing the motivation of workers
- Reduction in cost per unit may be the result of—
 - (A) Reduced expenditure, volume of production remaining same
 - (B) Higher production at same level of expenditure
 - (C) Higher production as a result of higher productivity
 - (D) All of the above
- 25. Cost reduction -
 - (A) Means reduction in total fixed cost of a business
 - (B) Means reduction in material cost per unit
 - (C) Means reduction in per unit cost of goods produced
 - (D) All of the above
- Higher productivity can be achieved—
 - (A) By negotiating with trade unions
 - (B) By not insisting on strict quality control

- (C) Proper system of preventive maintenance of machinery
- (D) All of the above
- Work simplification aims to—
 - (A) Determine how much time a job should take for completion
 - (B) Determine how a job should be done to increase productivity
 - (C) Find out how much time is lost in unproductive activity
 - (D) None of the above
- 28. Critical path is as certained in-
 - (A) CPM method
 - (B) PERT method
 - (C) Both of the above
 - (D) None of the above
- Break even analysis—
 - (A) Facilitates segregation of semi variable costs into fixed and variable cost
 - (B) Requires segregation of semi-variable costs into fixed and variable cost
 - (C) Assumes all costs as variable
 - (D) Assumes all costs as semi-variable
- Angle of incidence is angle formed by sales line and—
 - (A) Total cost line at break even point
 - (B) Variable cost line at break even point
 - (C) Fixed cost line
 - (D) Contribution line
- 31. Break even analysis is used for-
 - (A) Forecasting costs and profit as a result of change in volume
 - (B) Fixation of sales volume to earn a given profit
 - (C) Determination of sales price which would give a desired profit
 - (D) All of the above
- The formula used to find target quantity to have desired profit is—
 - (A) Fixed cost Target profit
 - (B) Fixed cost + Target profit
 - (C) Fixed cost + Target profit
 Contribution per unit
 - (D) Fixed cost + Variable cost Target profit

- The symbol representing storage in a process chart is—
 - (A) O
- (B) Δ[]
- (C)
- (D)
- 34. PERT stands for-
 - (A) Period estimation and revision technique
 - (B) Project estimation and revision technique
 - (C) Project evalution and revision technique
 - (D) Programme evalution and review technique
- 35. In network diagram an arrow represents -
 - (A) The direction
- (B) An activity
- (C) An event
- (D) All of the above
- 36. In network diagram a circle represents-
 - (A) An event
 - (B) Completion of the project
 - (C) Inactivity
 - (D) Shifting of resources from one activity to another activity
- Time estimates on each activity under PERT are made on the basis of—
 - (A) Optimistic estimate
 - (B) Normal estimate
 - (C) Pessimistic estimate
 - (D) All of the above
- 38. Dummy activity -
 - (A) Consumes no resources
 - (B) Consumes resources but does not take time
 - (C) Takes time but does not consumes resources
 - (D) Requires both time and resources
- Time variance of various activities in a net work is given by—
 - (A) Pessimistic time-Optimistic time
 - (B) (Pessimistic time—optimistic time)²
 - (C) (Pessimistic time—optimistic time)²
 2
 - (D) (Pessimistic time—optimistic time)²

- Binary Coded Decimal (B.C.D.) equivalent of 5 is—
 - (A) 0100
- (B) 0101
- (C) 0010
- (D) 0110
- 41. Time study is-
 - (A) Determination standard time for an operation
 - (B) Eliminating unnecessary work
 - (C) Carried out before work study
 - (D) Carried out for most efficient worker
- 42. Operating system is a part of-
 - (A) Hardware
 - (B) Software
 - (C) Both hardware and software
 - (D) None of the above
- 43. Software means-
 - (A) Programming techniques developed efficient use of computer hardware
 - (B) Mechanical, electrical, magnetic and electronic components of computer system
 - (C) Conversion process of high level language programme into machine language
 - (D) None of the above
- 44. A standard punched card has-
 - (A) 80 columns and 8 rows
 - (B) 80 columns and 10 rows
 - (C) 80 columns and 12 rows
 - (D) 100 columns and 10 rows
- For measuring standard time—
 - (A) An operator who is trained and experienced is selected
 - (B) An unskilled operator is selected
 - (C) A semi- skilled operator is selected
 - (D) An unexperienced operator is selected
- The chart showing relationship between man time and machine time is known as—
 - (A) Multiple activity chart
 - (B) Flow process chart
 - (C) Process chart
 - (D) None of these

- In time study, the measurement of actual observed time is done by—
 - (A) A stop watch
 - (B) A motion picture camera
 - (C) The machines using moving tape and disc
 - (D) Any of the above
- Basic time is expressed by the relation—
 - (A) Observed time × Standard rating
 Observed rating
 - (B) Observed time × Observed rating
 Standard rating
 - (C) Standard rating × Observed rating
 Observed time
 - Observed time
 - (D) Standard rating
- The chart used for analysing linear relationship between operations is known as—
 - (A) Gantt chart
 - (B) Travel chart
 - (C) Statistical quality control chart
 - (D) Emerson chart
- Roating and scheduling are integral parts of—
 - (A) Work study
 - (B) Production planning
 - (C) Statistical quality control
 - (D) Job analysis
- The inspection of each and every product is known as —
 - (A) Sampling inspection
 - (B) Hundred per cent inspection
 - (C) Functional inspection
 - (D) First off inspection
- 52. Group bonus system is used for-
 - (A) Direct workers for payment by results because their efficiency is not difficult to measure
 - (B) Indirect workers because their efficiency is difficult to measure
 - (C) Support individual bonus system
 - (D) Fixing maximum percentage of bonus to be used under different individual bonus system

- Under Halsey premium plan a worker who takes the same time as allowed time receives remuneration—
 - (A) At piece rate
 - (B) At piece rate with 10% efficiency bonus
 - (C) At time rate
 - (D) At time rate with 10% efficiency bonus
- Magnetic disc provides for ability to record and relative stored data—
 - (A) Sequentially only
 - (B) Randomly only
 - (C) Sequentially or randomly
 - (D) Systematically
- 55. If carbon is represented as 6C¹², then the number of electrons are equal to—
 - (A) 6
- (B) 12
- (C) 18
- (D) 2
- 56. The cooling system used in air craft is-
 - (A) Vapour compression system
 - (B) Vapour absorption system
 - (C) Air cycle refrigeration system
 - (D) Steam jet water vapour system
- The leakage of air into the refrigeration sysstem will—
 - (A) Lower its cooling efficiency
 - (B) Increase cooling efficiency
 - (C) Not affect its cooling efficiency
 - (D) Increase the C.O.P.
- 58. The sensible heat factor is equal to-
 - (A) Sensible heat
 - Latent heat
 - (B) Latent heat
 - Sensible heat
 - (C) Sensible heat
 - Sensible heat + Latent heat
 - (D) Sensible heat + Latent heat

Latent heat

- The amount of outdoor air required per person in an air conditioning for general purpose is—
 - (A) 0.4 cu. metre
- (B) 0.25 cu. metre
- (C) 0.8 cu. metre
- (D) 1.2 cu. metre

- 60. The dehumidification of air will change its-
 - (A) Dry bulb temperature
 - (B) Wet bulb temperature
 - (C) Humidity ratio
 - (D) All of the above
 - (E) None of the above
- The angle formation in cooling towers is controlled by—
 - (A) Using water of pH value equal to 5
 - (B) Blowing down water at intervals
 - (C) Adding chemicals, such as chlorinated lime, potassium permanganate, liquid chlorine, in water
 - (D) None of the above
- The corrosion in cooling towers and condensers can be controlled by keeping the pH value of water between—
 - (A) 0-2
- (B) 2-4
- (C) 6.5 to 7.5
- (D) 10 to 14
- The performance of reciprocating compressors compared by their—
 - (A) Isothermal efficiency
 - (B) Adiabatic efficiency
 - (C) Mechanical efficiency
 - (D) Overall efficiency
- 64. The thermal efficiency of an open cycle gas turbine increases with the—
 - (A) Increase in inlet temperature of atmospheric air
 - (B) Decrease in inlet temperature of atmospheric air
 - (C) Remain same for all temperatures of inlet air
 - (D) None of the above
- The performance of centrifugal compressors is compared by their—
 - (A) Mechanical efficiency
 - (B) Overall efficiency
 - (C) Adiabatic efficiency
 - (D) Isothermal efficiency
- 66. A perfect gas is one which obey's-
 - (A) All gas law's
 - (B) Only Boyle's law
 - (C) Only Charle's law
 - (D) None of the above

- 67. In metric system the unit of heat is given as—
 - (A) C.H.U.
- (B) B.T.U.
- (C) K.cal
- (D) Kelvin
- In an adiabatic process—
 - (A) The temperature remains constant
 - (B) The pressure and volume remains constant
 - (C) Work done is zero
 - (D) There is no flow of heat into and out of the system.
- 69. The main function of shielding a reactor is
 - (A) Prevent heat loss from the nuclear plant
 - (B) Reduce the amount of radiation reaching one region of space to another region of
 - (C) Prevent damage to the plant
 - (D) Protect it from heat and light
- In a heterogeneous reactor metallic uranium rods are clad with—
 - (A) Aluminium
- (B) Zirconium
- (C) Stainless steel (D) All of the above
- The main function of shielding in a nuclear reactor is to provide protection against —
 - (A) α-rays
- (B) β-rays
- (C) Gamma-rays
- (D) Electrons
- The scram control rods are used to-
 - (A) Control the chain reaction in the reactor
 - (B) Prevent radiation from the reaction
 - (C) Control the pressure of steam
 - (D) None of the above
- The coolant used in the Nuclear Plant should have —
 - (A) Low coefficient of heat
 - (B) The tendency to absorb neutrons as low as possible
 - (C) High induced radio activity
 - (D) None of the above
- 74. The material used to slow down neutrons released during the fission process is known as—
 - (A) Moderator
 - (B) Fertile material
 - (C) Fissionable fuel
 - (D) Reflector

- 75. The device used to regulate the flow of the refrigerant in a system is known as—
 - (A) Capillary tube
 - (B) Solenoid valve
 - (C) Thermostatic expansion valve
 - (D) None of the above
 - (E) All of the above
- The dry bulb temperature lines of psychrometric chart are -
 - (A) Vertical
- (B) Horizontal
- (C) Inclined
- (D) Curved
- Potential energy possessed by a body is given by the relation—
 - (A) mgh
- (B) mh
- (C) $\frac{m}{o}h$
- (D) $\frac{1}{2}mv^2$
- The temperature of the air leaving the cooling coil as compared to the apparatus dew point temperature is -
 - (A) More
- (B) Less
- (C) Same
- (D) Unpredictable
- In evaporative type of condenser, the refrigerant is cooled by-
 - (A) The water
 - (B) The air
 - (C) Both air and water
 - (D) None of the above
- The By Pass Factor (BPF) is expressed as—
 - (A) $\frac{dt_1 t_{\text{coil}}}{dt_2 t_{\text{coil}}}$
- (B) $\frac{dt_1 + t_{\text{coil}}}{dt_2 t_{\text{coil}}}$
 - (C) $\frac{dt_1 t_{\text{coil}}}{dt_2 + t_{\text{coil}}}$ (D) $\frac{dt_1 + t_{\text{coil}}}{dt_2 + t_{\text{coil}}}$
- 81. According to Newton's law of cooling, the rate of heat transfer from a solid surface of area A, at a temperature t_1 , to fluid at temperature t2, is given by—

 - (A) $Q = hA(t_1 t_2)$ (B) $Q = hA(t_1 + t_2)$
 - (C) $Q = \frac{h}{A}(t_1 t_2)$ (D) $Q = \frac{A}{h}(t_1 t_2)$
- In a vapour compression system, the compression of refrigerant vapour follows the law-
 - (A) $(pv^r = C)$
- (B) (pv = C)
- (C) $(pv^n = C)$
- (D) None of the above

- 83. In case of dry compression the vapours-
 - (A) Enter the compressor in wet state
 - (B) Leave the compressor in dry saturated state
 - (C) Enter the compressor in dry saturated state
 - (D) None of the above
- 84. The coefficient of performance of a machine in case of wet compression as compared to dry compression is—
 - (A) More
- (B) Less
- (C) Same
- (D) Unpredictable
- 85. The coefficient of performance of a refrigerating machine is given by the relation—
 - (A) C.O.P. = $\frac{W}{N}$
 - (B) C.O.P. = $\frac{N}{W}$
 - (C) $C.O.P. = N \times W$
 - (D) C.O.P. = W N
- 86. The capacity of a refrigerating machine is expressed in—
 - (A) Tonns of refrigeration
 - (B) Term of lowest temperature attained
 - (C) Term of weight of a machine
 - (D) Term of volume of a space to be cooled
- 87. Which one of the following is most harmful for the human body?
 - (A) Alpha particles
 - (B) Beta particles
 - (C) Gamma particles
 - (D) None of the above
- Pick up the correct equation in which alpha particle is emitted—
 - (A) $_{92}U^{238} \rightarrow {}_{2}He^4 + {}_{90}Th^{234}$
 - (B) $_{92}U^{238} \rightarrow {}_{2}He^4 + {}_{92}Th^{238}$
 - (C) $_{92}U^{238} \rightarrow {}_{4}He^2 + {}_{90}Th^{234}$
 - (D) $_{92}U^{238} \rightarrow _{2}He^4 + _{94}Th^{242}$
- 89. The readily fissionable material is-
 - (A) Uranium-234
- (B) Uranium-235
- (C) Uranium-238
- (D) All of the above
- 90. One kg. of uranium will produce energy equivalent to approximate—
 - (A) 30,000 tonnes of coal
 - (B) 30 tonnes of coal

- (C) 3000 tonnes of coal
- (D) 300 tonnes of coal
- Combining of light nuclides to form a single heavy nucleus is called—
 - (A) Fusion
- (B) Fission
- (C) Solidification
- (D) Atomization
- The division of heavy nucleus into smaller ones is called—
 - (A) Fusion
 - (B) Fission
 - (C) Vaporization
 - (D) None of the above
- 93. Fertile material is that which-
 - (A) Can be transformed into a fissionable material by capture of neutron
 - (B) Cannot be transformed into a fissionable material
 - (C) Is used as basic raw material for nuclear power plant
 - (D) None of the above
- 94. Isotopes of the element has-
 - (A) Same number of neutrons
 - (B) Different number of neutrons
 - (C) Same atomic weight
 - (D) None of the above
- 95. If Beryllium is represented as 5Be9, then the number of neutrons are equal to—
 - (A) 9
- (B) 5
- (C) 14
- (D) 4
- The room air conditioner controls the—
 - (A) Temperature of the air
 - (B) Temperature and humidity of the air
 - (C) Temperature and dust of the air
 - (D) None of these
- The milk is stored at a temperature of—
 - (A) 4°C
- $(B) 5^{\circ}C$
- (C) 10°C
- (D) 12°C
- 98. The process of heating and immediately cooling the milk for controlling the bacterial growth is known as—
 - (A) Pasteurisation
- (B) Regeneration
- (C) Blending
- (D) None of these

184 Mech. Eng	184	Mech.	Engg.
-----------------	-----	-------	-------

104. The essential constituent of a hardness steel

is—

 99. The value of Poisson's ratio for steel varies from— (A) 0·20 to 0·25 (B) 0·25 to 0·35 (C) 0·35 to 0·40 (D) 0·40 to 0·55 100. A composite section, contains four different materials. The stresses in all the different materials will be— (A) Zero (B) Equal 	(C) Martensite (D) Troostite 105. An eutectoid steel consists of— (A) Wholly pearlite (B) Wholly austenite
 (C) Different (D) In the ratio of their areas 101. The maximum stress produced in a bar of tapering section is at— (A) Larger end (B) Smaller end (C) Middle (D) None of these 102. Which of the following is a non-destructive test? (A) Tensile test (B) Ultrasonic test (C) Compression test (D) Creep test 	16. (C) 17. (B) 18. (C) 19. (A) 20. (C) 21. (D) 22. (D) 23. (A) 24. (D) 25. (C) 26. (C) 27. (B) 28. (C) 29. (B) 30. (A)
 (A) 13 per cent carbon and 87 per cent ferrite (B) 13 per cent cementite and 87 per cent ferrite (C) 13 per cent ferrite and 87 per cent cementite (D) 6.67 per cent carbon and 93.33 per cent iron 	61. (C) 62. (C) 63. (A) 64. (B) 65. (C) 66. (A) 67. (C) 68. (D) 69. (B) 70. (D) 71. (C) 72. (A) 73. (B) 74. (A) 75. (E) 76. (A) 77. (A) 78. (A) 79. (C) 80. (A) 81. (A) 82. (A) 83. (C) 84. (A) 85. (A)

96. (B) 97. (A)

98. (A)

101. (B) 102. (B) 103. (D) 104. (C) 105. (A)

99.(B) 100.(C)

www.EngineeringEBooksPdf.com

Model Set - 5

- The selection of site for thermal power plant depends upon the—
 - (A) Availability of large quantity of water
 - (B) Climatic and atmospheric conditions of the area
 - (C) Availability of social and recreational facilities
 - (D) None of the above
- 2. The size of site should be at least-
 - (A) Twice the actual size of plant
 - (B) Four times the actual size of plant
 - (C) Five times the actual size of plant
 - (D) Eight times the actual size of plant
- The main object of plant layout is—
 - (A) To make economical use of floor area
 - (B) To maintain flexibility of arrangement of operations
 - (C) To minimise the material bending
 - (D) To produce better quality of product
 - (E) All of the above
- Product layout is used—
 - (A) Where expensive machinery is involved
 - (B) Where operations require hand tools
 - (C) Where product is manufactured in large quantity
 - (D) None of the above
- Process layout is used—
 - (A) Where expensive machinery is involved and variety of products are made
 - (B) Where operations require hand tools
 - (C) Where products are manufactured in large quantity
 - (D) All of the above
- Margin of safety is found by deducing from sales—
 - (A) Fixed cost
 - (B) Variable cost

- (C) Total cost
- (D) Sales at break even point
- The factor on which the selection of plant location depends upon—
 - (A) Future expansion of plant
 - (B) Decentralization of industry
 - (C) The cost at which the goods is delivered to the customer
 - (D) All of the above
- The iron and steel industries should be located close to—
 - (A) Availability of raw material
 - (B) Market
 - (C) Availability of large quantity of water
 - (D) The big city
- 9. Which of the layout is used for ship building industry?
 - (A) Fixed position layout
 - (B) Process layout
 - (C) Product layout
 - (D) Combination of process and product layout
- Economic ordering quantity is the quantity—
 - (A) Most uneconomical to order
 - (B) Most economical to stock
 - (C) Most economical to order
 - (D) That enable availing maximum discount
- Lead times is the average time elapsed between—
 - (A) Initiation of the order and receipt of material
 - (B) Preparation of purchase order and acceptance or order by supplier
 - (C) Placing of order and consumption of present stock
 - (D) Consumption of material from minimum level to safety level

- 178 | Mech. Engg.
- Fixed position layout is also called as—
 - (A) Static product layout
 - (B) Process layout
 - (C) Analytical layout
 - (D) Scientific layout
- The location of textile industries in and around Mumbai in influenced by the—
 - (A) Atmospheric conditions prevailing there and the proximity to market
 - (B) Availability of raw material
 - (C) Availability of power and fuel
 - (D) Availability of skilled workers
- 14. Good material handling involves-
 - (A) Avoiding re-loading
 - (B) Eliminating materials handling by hard labour or machine operator
 - (C) Using equipment to match the pace of machine operator
 - (D) All of the above
- 15. Which of the following is overhead conveyor?
 - (A) Chain conveyor (B) Power roller
 - (C) Belt conveyor (D) Mouorail
- The type of material handling equipment used for moving high volume of material from one fixed point to another is—
 - (A) Cranes
- (B) Trucks
- (C) Conveyors
- (D) Hoists
- Powders, liquids and gases should be transported by—
 - (A) Trucks
- (B) Pipes
- (C) Conveyors
- (D) None of the above
- Break-even point is that volume of sales where there is—
 - (A) Maximum profit
 - (B) Minimum loss
 - (C) No profit no loss
 - (D) Maximum contribution
- In product layout
 - (A) A single machine break down may shut down the whole production line
 - (B) Machine break down do not help up the production
 - (C) More floor space is required
 - (D) It is difficult to train workers

- The chart which indicates the flow of material between various work stations is known as—
 - (A) Operational process chart
 - (B) Flow process chart
 - (C) Travel chart
 - (D) All of the above
- Higher production—
 - (A) Means higher productivity
 - (B) Means proportional higher productivity
 - (C) Always involves higher productivity
 - (D) Does not necessarily mean higher productivity
- 22. Improving the production means-
 - (A) Increased production with same input
 - (B) Increased production with lesser input
 - (C) Lower wastages per unit of output
 - (D) All of the above
- 23. Which one of the follwing methods of increasing production is not through as improvement in productivity?
 - (A) Increasing plant and equipment capacity
 - (B) Better utilisation of plant and equipment
 - (C) Simplification of basic design
 - (D) Increasing the motivation of workers
- Reduction in cost per unit may be the result of—
 - (A) Reduced expenditure, volume of production remaining same
 - (B) Higher production at same level of expenditure
 - (C) Higher production as a result of higher productivity
 - (D) All of the above
- 25. Cost reduction -
 - (A) Means reduction in total fixed cost of a business
 - (B) Means reduction in material cost per unit
 - (C) Means reduction in per unit cost of goods produced
 - (D) All of the above
- Higher productivity can be achieved—
 - (A) By negotiating with trade unions
 - (B) By not insisting on strict quality control

- (C) Proper system of preventive maintenance of machinery
- (D) All of the above
- Work simplification aims to—
 - (A) Determine how much time a job should take for completion
 - (B) Determine how a job should be done to increase productivity
 - (C) Find out how much time is lost in unproductive activity
 - (D) None of the above
- 28. Critical path is as certained in-
 - (A) CPM method
 - (B) PERT method
 - (C) Both of the above
 - (D) None of the above
- Break even analysis—
 - (A) Facilitates segregation of semi variable costs into fixed and variable cost
 - (B) Requires segregation of semi-variable costs into fixed and variable cost
 - (C) Assumes all costs as variable
 - (D) Assumes all costs as semi-variable
- Angle of incidence is angle formed by sales line and—
 - (A) Total cost line at break even point
 - (B) Variable cost line at break even point
 - (C) Fixed cost line
 - (D) Contribution line
- 31. Break even analysis is used for-
 - (A) Forecasting costs and profit as a result of change in volume
 - (B) Fixation of sales volume to earn a given profit
 - (C) Determination of sales price which would give a desired profit
 - (D) All of the above
- The formula used to find target quantity to have desired profit is—
 - (A) Fixed cost Target profit
 - (B) Fixed cost + Target profit
 - (C) Fixed cost + Target profit
 Contribution per unit
 - (D) Fixed cost + Variable cost Target profit

- The symbol representing storage in a process chart is—
 - (A) O
- (B) Δ[]
- (C)
- (D)
- 34. PERT stands for-
 - (A) Period estimation and revision technique
 - (B) Project estimation and revision technique
 - (C) Project evalution and revision technique
 - (D) Programme evalution and review technique
- 35. In network diagram an arrow represents -
 - (A) The direction
- (B) An activity
- (C) An event
- (D) All of the above
- 36. In network diagram a circle represents-
 - (A) An event
 - (B) Completion of the project
 - (C) Inactivity
 - (D) Shifting of resources from one activity to another activity
- Time estimates on each activity under PERT are made on the basis of—
 - (A) Optimistic estimate
 - (B) Normal estimate
 - (C) Pessimistic estimate
 - (D) All of the above
- 38. Dummy activity -
 - (A) Consumes no resources
 - (B) Consumes resources but does not take time
 - (C) Takes time but does not consumes resources
 - (D) Requires both time and resources
- Time variance of various activities in a net work is given by—
 - (A) Pessimistic time-Optimistic time
 - (B) (Pessimistic time—optimistic time)²
 - (C) (Pessimistic time—optimistic time)²
 2
 - (D) (Pessimistic time—optimistic time)²

- Binary Coded Decimal (B.C.D.) equivalent of 5 is—
 - (A) 0100
- (B) 0101
- (C) 0010
- (D) 0110
- 41. Time study is-
 - (A) Determination standard time for an operation
 - (B) Eliminating unnecessary work
 - (C) Carried out before work study
 - (D) Carried out for most efficient worker
- 42. Operating system is a part of-
 - (A) Hardware
 - (B) Software
 - (C) Both hardware and software
 - (D) None of the above
- 43. Software means-
 - (A) Programming techniques developed efficient use of computer hardware
 - (B) Mechanical, electrical, magnetic and electronic components of computer system
 - (C) Conversion process of high level language programme into machine language
 - (D) None of the above
- 44. A standard punched card has -
 - (A) 80 columns and 8 rows
 - (B) 80 columns and 10 rows
 - (C) 80 columns and 12 rows
 - (D) 100 columns and 10 rows
- For measuring standard time—
 - (A) An operator who is trained and experienced is selected
 - (B) An unskilled operator is selected
 - (C) A semi- skilled operator is selected
 - (D) An unexperienced operator is selected
- 46. The chart showing relationship between man time and machine time is known as—
 - (A) Multiple activity chart
 - (B) Flow process chart
 - (C) Process chart
 - (D) None of these

- In time study, the measurement of actual observed time is done by—
 - (A) A stop watch
 - (B) A motion picture camera
 - (C) The machines using moving tape and disc
 - (D) Any of the above
- 48. Basic time is expressed by the relation
 - (A) Observed time × Standard rating
 Observed rating
 - (B) Observed time × Observed rating
 Standard rating
 - (C) Standard rating × Observed rating
 Observed time
 - Observed time
 - Standard rating
- The chart used for analysing linear relationship between operations is known as—
 - (A) Gantt chart
 - (B) Travel chart
 - (C) Statistical quality control chart
 - (D) Emerson chart
- Roating and scheduling are integral parts of—
 - (A) Work study
 - (B) Production planning
 - (C) Statistical quality control
 - (D) Job analysis
- The inspection of each and every product is known as —
 - (A) Sampling inspection
 - (B) Hundred per cent inspection
 - (C) Functional inspection
 - (D) First off inspection
- Group bonus system is used for—
 - (A) Direct workers for payment by results because their efficiency is not difficult to measure
 - (B) Indirect workers because their efficiency is difficult to measure
 - (C) Support individual bonus system
 - (D) Fixing maximum percentage of bonus to be used under different individual bonus system

- Under Halsey premium plan a worker who takes the same time as allowed time receives remuneration—
 - (A) At piece rate
 - (B) At piece rate with 10% efficiency bonus
 - (C) At time rate
 - (D) At time rate with 10% efficiency bonus
- Magnetic disc provides for ability to record and relative stored data—
 - (A) Sequentially only
 - (B) Randomly only
 - (C) Sequentially or randomly
 - (D) Systematically
- 55. If carbon is represented as 6C¹², then the number of electrons are equal to—
 - (A) 6
- (B) 12
- (C) 18
- (D) 2
- 56. The cooling system used in air craft is-
 - (A) Vapour compression system
 - (B) Vapour absorption system
 - (C) Air cycle refrigeration system
 - (D) Steam jet water vapour system
- The leakage of air into the refrigeration sysstem will—
 - (A) Lower its cooling efficiency
 - (B) Increase cooling efficiency
 - (C) Not affect its cooling efficiency
 - (D) Increase the C.O.P.
- 58. The sensible heat factor is equal to-
 - (A) Sensible heat
 - Latent heat
 - (B) Latent heat
 - Sensible heat
 - Sensible heat
 - (C) Sensible heat + Latent heat
 - (D) Sensible heat + Latent heat

Latent heat

- The amount of outdoor air required per person in an air conditioning for general purpose is—
 - (A) 0.4 cu. metre
- (B) 0.25 cu. metre
- (C) 0.8 cu. metre
- (D) 1.2 cu. metre

- 60. The dehumidification of air will change its-
 - (A) Dry bulb temperature
 - (B) Wet bulb temperature
 - (C) Humidity ratio
 - (D) All of the above
 - (E) None of the above
- The angle formation in cooling towers is controlled by—
 - (A) Using water of pH value equal to 5
 - (B) Blowing down water at intervals
 - (C) Adding chemicals, such as chlorinated lime, potassium permanganate, liquid chlorine, in water
 - (D) None of the above
- The corrosion in cooling towers and condensers can be controlled by keeping the pH value of water between—
 - (A) 0-2
- (B) 2-4
- (C) 6.5 to 7.5
- (D) 10 to 14
- 63. The performance of reciprocating compressors compared by their—
 - (A) Isothermal efficiency
 - (B) Adiabatic efficiency
 - (C) Mechanical efficiency
 - (D) Overall efficiency
- 64. The thermal efficiency of an open cycle gas turbine increases with the—
 - (A) Increase in inlet temperature of atmospheric air
 - (B) Decrease in inlet temperature of atmospheric air
 - (C) Remain same for all temperatures of inlet air
 - (D) None of the above
- The performance of centrifugal compressors is compared by their—
 - (A) Mechanical efficiency
 - (B) Overall efficiency
 - (C) Adiabatic efficiency
 - (D) Isothermal efficiency
- 66. A perfect gas is one which obey's-
 - (A) All gas law's
 - (B) Only Boyle's law
 - (C) Only Charle's law
 - (D) None of the above

- 67. In metric system the unit of heat is given as—
 - (A) C.H.U.
- (B) B.T.U.
- (C) K.cal
- (D) Kelvin
- In an adiabatic process—
 - (A) The temperature remains constant
 - (B) The pressure and volume remains constant
 - (C) Work done is zero
 - (D) There is no flow of heat into and out of the system.
- 69. The main function of shielding a reactor is
 - (A) Prevent heat loss from the nuclear plant
 - (B) Reduce the amount of radiation reaching one region of space to another region of
 - (C) Prevent damage to the plant
 - (D) Protect it from heat and light
- In a heterogeneous reactor metallic uranium rods are clad with—
 - (A) Aluminium
- (B) Zirconium
- (C) Stainless steel (D) All of the above
- The main function of shielding in a nuclear reactor is to provide protection against —
 - (A) α-rays
- (B) β-rays
- (C) Gamma-rays
- (D) Electrons
- The scram control rods are used to-
 - (A) Control the chain reaction in the reactor
 - (B) Prevent radiation from the reaction
 - (C) Control the pressure of steam
- (D) None of the above
- The coolant used in the Nuclear Plant should have —
 - (A) Low coefficient of heat
 - (B) The tendency to absorb neutrons as low as possible
 - (C) High induced radio activity
 - (D) None of the above
- 74. The material used to slow down neutrons released during the fission process is known as—
 - (A) Moderator
 - (B) Fertile material
 - (C) Fissionable fuel
 - (D) Reflector

- 75. The device used to regulate the flow of the refrigerant in a system is known as—
 - (A) Capillary tube
 - (B) Solenoid valve
 - (C) Thermostatic expansion valve
 - (D) None of the above
 - (E) All of the above
- The dry bulb temperature lines of psychrometric chart are -
 - (A) Vertical
- (B) Horizontal
- (C) Inclined
- (D) Curved
- Potential energy possessed by a body is given by the relation—
 - (A) mgh
- (B) mh
- (C) $\frac{m}{o}h$
- (D) $\frac{1}{2}mv^2$
- The temperature of the air leaving the cooling coil as compared to the apparatus dew point temperature is -
 - (A) More
- (B) Less
- (C) Same
- (D) Unpredictable
- In evaporative type of condenser, the refrigerant is cooled by-
 - (A) The water
 - (B) The air
 - (C) Both air and water
 - (D) None of the above
- The By Pass Factor (BPF) is expressed as—
 - (A) $\frac{dt_1 t_{\text{coil}}}{dt_2 t_{\text{coil}}}$
- (B) $\frac{dt_1 + t_{\text{coil}}}{dt_2 t_{\text{coil}}}$
 - (C) $\frac{dt_1 t_{\text{coil}}}{dt_2 + t_{\text{coil}}}$ (D) $\frac{dt_1 + t_{\text{coil}}}{dt_2 + t_{\text{coil}}}$
- 81. According to Newton's law of cooling, the rate of heat transfer from a solid surface of area A, at a temperature t_1 , to fluid at temperature t2, is given by—
 - (A) $Q = hA(t_1 t_2)$ (B) $Q = hA(t_1 + t_2)$
 - (C) $Q = \frac{h}{A}(t_1 t_2)$ (D) $Q = \frac{A}{h}(t_1 t_2)$
- In a vapour compression system, the compression of refrigerant vapour follows the law-
 - (A) $(pv^r = C)$
- (B) (pv = C)
- (C) $(pv^n = C)$
- (D) None of the above

- 83. In case of dry compression the vapours-
 - (A) Enter the compressor in wet state
 - (B) Leave the compressor in dry saturated state
 - (C) Enter the compressor in dry saturated state
 - (D) None of the above
- 84. The coefficient of performance of a machine in case of wet compression as compared to dry compression is—
 - (A) More
- (B) Less
- (C) Same
- (D) Unpredictable
- 85. The coefficient of performance of a refrigerating machine is given by the relation—
 - (A) C.O.P. = $\frac{W}{N}$
 - (B) C.O.P. = $\frac{N}{W}$
 - (C) $C.O.P. = N \times W$
 - (D) C.O.P. = W N
- 86. The capacity of a refrigerating machine is expressed in—
 - (A) Tonns of refrigeration
 - (B) Term of lowest temperature attained
 - (C) Term of weight of a machine
 - (D) Term of volume of a space to be cooled
- 87. Which one of the following is most harmful for the human body?
 - (A) Alpha particles
 - (B) Beta particles
 - (C) Gamma particles
 - (D) None of the above
- Pick up the correct equation in which alpha particle is emitted—
 - (A) $_{92}U^{238} \rightarrow {}_{2}He^4 + {}_{90}Th^{234}$
 - (B) $_{92}U^{238} \rightarrow {}_{2}He^4 + {}_{92}Th^{238}$
 - (C) $_{92}U^{238} \rightarrow {}_{4}He^2 + {}_{90}Th^{234}$
 - (D) $_{92}U^{238} \rightarrow _{2}He^4 + _{94}Th^{242}$
- 89. The readily fissionable material is-
 - (A) Uranium-234
- (B) Uranium-235
- (C) Uranium-238
- (D) All of the above
- One kg. of uranium will produce energy equivalent to approximate—
 - (A) 30,000 tonnes of coal
 - (B) 30 tonnes of coal

- (C) 3000 tonnes of coal
- (D) 300 tonnes of coal
- Combining of light nuclides to form a single heavy nucleus is called—
 - (A) Fusion
- (B) Fission
- (C) Solidification
- (D) Atomization
- The division of heavy nucleus into smaller ones is called—
 - (A) Fusion
 - (B) Fission
 - (C) Vaporization
 - (D) None of the above
- 93. Fertile material is that which-
 - (A) Can be transformed into a fissionable material by capture of neutron
 - (B) Cannot be transformed into a fissionable material
 - (C) Is used as basic raw material for nuclear power plant
 - (D) None of the above
- 94. Isotopes of the element has-
 - (A) Same number of neutrons
 - (B) Different number of neutrons
 - (C) Same atomic weight
 - (D) None of the above
- 95. If Beryllium is represented as 5Be9, then the number of neutrons are equal to—
 - (A) 9
- (B) 5
- (C) 14
- (D) 4
- The room air conditioner controls the—
 - (A) Temperature of the air
 - (B) Temperature and humidity of the air
 - (C) Temperature and dust of the air
 - (D) None of these
- The milk is stored at a temperature of—
 - (A) 4°C
- $(B) 5^{\circ}C$
- (C) 10°C
- (D) 12°C
- 98. The process of heating and immediately cooling the milk for controlling the bacterial growth is known as—
 - (A) Pasteurisation
- (B) Regeneration
- (C) Blending
- (D) None of these

184	1	Mech.	Engg.
		1110011	

104. The essential constituent of a hardness steel

is-

99.	The value of Poisson's ratio for steel varies from—		Pearlite Martensite		Austenite Troostite	
	(A) 0·20 to 0·25 (B) 0·25 to 0·35 (C) 0·35 to 0·40 (D) 0·40 to 0·55	105. An e	eutectoid ste Wholly pea	el consists		
100.	100. A composite section, contains four different materials. The stresses in all the different materials will be—		Wholly aus Pearlite and	stenite		
	(A) Zero	(D)	Pearlite and	d cementit	e	
	(B) Equal	Answers				
	(C) Different	1. (A)	2. (C)	3.(E)	4.(C)	5. (A)
	(D) In the ratio of their areas	6. (D)		8. (A)	9. (A)	10.(C)
101.	The maximum stress produced in a bar of	11. (A)		13. (A)	14. (D)	15. (D)
	tapering section is at—	16. (C)		18.(C)	19. (A)	20.(C)
	(A) Larger end (B) Smaller end	21. (D)		23. (A)	24. (D)	25.(C)
	(C) Middle (D) None of these	26. (C)		28.(C)	29.(B)	30. (A)
102.	Which of the following is a non-destructive test?	31. (D)		33.(B)	34. (D)	35.(B)
	(A) Tensile test	36. (A)	37. (D)	38. (A)	39. (D)	40.(B)
	(B) Ultrasonic test	41. (A)	42. (B)	43. (A)	44.(C)	45. (A)
	(C) Compression test	46. (A)	47. (B)	48.(B)	49. (A)	50.(B)
	(D) Creep test	51. (B)		53.(C)	54. (C)	55. (A)
103	Cementite consists of—	56. (C)		58. (C)	59. (B)	60. (D)
103.	(A) 13 per cent carbon and 87 per cent ferrite	61. (C)		63. (A)	64. (B)	65.(C)
	(B) 13 per cent carbon and 87 per cent refine (B) 13 per cent cementite and 87 per cent ferrite (C) 13 per cent ferrite and 87 per cent cementite		67. (C)	68. (D)	69.(B)	70. (D)
			72.(A)	73.(B)	74. (A)	75.(E)
			77.(A)	78. (A)	79.(C)	80. (A)
			82.(A)	83.(C)	84. (A)	85. (A)
	(D) 6.67 per cent carbon and 93.33 per cent	86. (A)		88. (A)	89. (B)	90.(C)
	iron	91. (A)	92. (B)	93. (A)	94. (B)	95. (D)

96. (B) 97. (A)

98. (A)

101. (B) 102. (B) 103. (D) 104. (C) 105. (A)

99.(B) 100.(C)

www.EngineeringEBooksPdf.com

Objective Mechanical Engineering

[Railway & Other Engineering (Diploma) Competitive Exams.]



YOUR SUCCESS
IS
OUR AIM
SURE SUCCESS
WITH
OUR NAME
THAT IS



